

Roof Repair / Replacement for Building 1784

Federal Project Number: PN 15140055
State Job Number: CA-1419-D

State of Hawaii Department of Defense
Hawaii Army National Guard

100% Final Design Specifications

19 June 2015

FERRARO CHOI

Ferraro Choi and Associates
1240 Ala Moana Boulevard, Suite 510
Honolulu, Hawaii 96814
(808) 533-8880
www.ferrarochoi.com

PROJECT TABLE OF CONTENTS

DIVISION 02 - EXISTING CONDITIONS

02 41 00 SELECTIVE DEMOLITION
02 83 13.00 20 LEAD IN CONSTRUCTION

DIVISION 07 - THERMAL AND MOISTURE PROTECTION

07 22 00 ROOF AND DECK INSULATION
07 53 23 ETHYLENE-PROPYLENE-DIENE-MONOMER ROOFING
07 60 00 FLASHING AND SHEET METAL
07 72 33 ROOF HATCHES
07 92 00 JOINT SEALANTS

DIVISION 09 - FINISHES

09 90 00 PAINTS AND COATINGS

DIVISION 23 - HEATING, VENTILATING, AND AIR CONDITIONING

23 00 00 AIR SUPPLY, DISTRIBUTION, VENTILATION, AND EXHAUST SYSTEMS
23 05 93 TESTING, ADJUSTING, AND BALANCING FOR HVAC

DIVISION 26 - ELECTRICAL

26 00 00.00 20 BASIC ELECTRICAL MATERIALS AND METHODS

-- End of Project Table of Contents --

SECTION TABLE OF CONTENTS

DIVISION 02 - EXISTING CONDITIONS

SECTION 02 41 00

SELECTIVE DEMOLITION

05/10

PART 1 GENERAL

- 1.1 REFERENCES
- 1.2 PROJECT DESCRIPTION
 - 1.2.1 General Requirements
- 1.3 ITEMS TO REMAIN IN PLACE
 - 1.3.1 Existing Construction Limits and Protection
 - 1.3.2 Weather Protection
 - 1.3.3 Trees
 - 1.3.4 Facilities
- 1.4 BURNING
- 1.5 SUBMITTALS
- 1.6 QUALITY ASSURANCE
 - 1.6.1 Dust and Debris Control
- 1.7 PROTECTION
 - 1.7.1 Traffic Control Signs
- 1.8 RELOCATIONS
- 1.9 EXISTING CONDITIONS

PART 2 PRODUCTS

PART 3 EXECUTION

- 3.1 EXISTING FACILITIES TO BE REMOVED
 - 3.1.1 Structures
 - 3.1.2 Utilities and Related Equipment
 - 3.1.2.1 General Requirements
 - 3.1.3 Roofing
 - 3.1.3.1 Temporary Roofing
 - 3.1.3.2 Reroofing
 - 3.1.4 Miscellaneous Metal
 - 3.1.5 Patching
 - 3.1.6 Air Conditioning Equipment
 - 3.1.7 Mechanical Equipment and Fixtures
 - 3.1.7.1 Preparation for Storage
 - 3.1.7.2 Piping
 - 3.1.7.3 Ducts
 - 3.1.7.4 Fixtures, Motors and Machines
 - 3.1.8 Electrical Equipment and Fixtures
 - 3.1.8.1 Electrical Devices
 - 3.1.8.2 Conduit and Miscellaneous Items
 - 3.1.9 Items With Unique/Regulated Disposal Requirements
- 3.2 DISPOSITION OF MATERIAL
 - 3.2.1 Title to Materials
 - 3.2.2 Disposal of Ozone Depleting Substance (ODS)

- 3.2.2.1 Special Instructions
- 3.2.3 Transportation Guidance
- 3.2.4 Unsalvageable and Non-Recyclable Material
- 3.3 CLEANUP
- 3.4 DISPOSAL OF REMOVED MATERIALS
 - 3.4.1 Regulation of Removed Materials
 - 3.4.2 Burning on Government Property
 - 3.4.3 Removal to Spoil Areas on Government Property
 - 3.4.4 Removal from Government Property
- 3.5 REUSE OF SALVAGED ITEMS

-- End of Section Table of Contents --

SECTION 02 41 00

SELECTIVE DEMOLITION
05/10

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AIR-CONDITIONING, HEATING AND REFRIGERATION INSTITUTE (AHRI)

AHRI Guideline K (2009) Guideline for Containers for Recovered Non-Flammable Fluorocarbon Refrigerants

AMERICAN SOCIETY OF SAFETY ENGINEERS (ASSE/SAFE)

ASSE/SAFE A10.6 (2006) Safety Requirements for Demolition Operations

U.S. ARMY CORPS OF ENGINEERS (USACE)

EM 385-1-1 (2008; Errata 2011) Safety and Health Requirements Manual

U.S. DEFENSE LOGISTICS AGENCY (DLA)

DLA 4145.25 (Jun 2000; Reaffirmed Oct 2010) Storage and Handling of Liquefied and Gaseous Compressed Gases and Their Full and Empty Cylinders
<http://www.aviation.dla.mil/UserWeb/aviationengineering/>

U.S. DEPARTMENT OF DEFENSE (DOD)

DOD 4000.25-1-M (2006) MILSTRIP - Military Standard Requisitioning and Issue Procedures

MIL-STD-129 (2014; Rev R) Military Marking for Shipment and Storage

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

40 CFR 61 National Emission Standards for Hazardous Air Pollutants

40 CFR 82 Protection of Stratospheric Ozone

49 CFR 173.301 Shipment of Compressed Gases in Cylinders and Spherical Pressure Vessels

1.2 PROJECT DESCRIPTION

1.2.1 General Requirements

Do not begin demolition or deconstruction until authorization is received from the Contracting Officer. The work of this section is to be performed in a manner that maximizes the value derived from the salvage and recycling of materials. Remove rubbish and debris from the project site; do not allow accumulations inside or outside the buildings. In the interest of occupational safety and health, perform the work in accordance with EM 385-1-1, Section 23, Demolition, and other applicable Sections.

1.3 ITEMS TO REMAIN IN PLACE

Take necessary precautions to avoid damage to existing items to remain in place, to be reused, or to remain the property of the Government. Repair or replace damaged items as approved by the Contracting Officer. Coordinate the work of this section with all other work indicated. Construct and maintain shoring, bracing, and supports as required. Ensure that structural elements are not overloaded. Increase structural supports or add new supports as may be required as a result of any cutting, removal, deconstruction, or demolition work performed under this contract. Do not overload structural elements. Provide new supports and reinforcement for existing construction weakened by demolition, deconstruction, or removal work. Repairs, reinforcement, or structural replacement require approval by the Contracting Officer prior to performing such work.

1.3.1 Existing Construction Limits and Protection

Do not disturb existing construction beyond the extent indicated or necessary for installation of new construction. Provide temporary shoring and bracing for support of building components to prevent settlement or other movement. Provide protective measures to control accumulation and migration of dust and dirt in all work areas. Remove dust, dirt, and debris from work areas daily.

1.3.2 Weather Protection

For portions of the building to remain, protect building interior and materials and equipment from the weather at all times. Where removal of existing roofing is necessary to accomplish work, have materials and workmen ready to provide adequate and temporary covering of exposed areas.

1.3.3 Trees

Protect trees within the project site that are to remain and which might be damaged during demolition or deconstruction by a 6 foot high fence. Erect and secure fence a minimum of 5 feet from the trunk of individual trees or follow the outer perimeter of branches or clumps of trees. Replace any tree that is damaged during the work under this contract with like-kind or as approved by the Contracting Officer.

1.3.4 Facilities

Protect electrical and mechanical services and utilities. Floors, roofs, walls, columns, pilasters, and other structural components that are designed and constructed to stand without lateral support or shoring, and are determined to be in stable condition, must remain standing without additional bracing, shoring, or lateral support until demolished or

deconstructed, unless directed otherwise by the Contracting Officer. Ensure that no elements determined to be unstable are left unsupported and place and secure bracing, shoring, or lateral supports as may be required as a result of any cutting, removal, deconstruction, or demolition work performed under this contract.

1.4 BURNING

The use of burning at the project site for the disposal of refuse and debris will not be permitted. Where burning is permitted, adhere to federal, state, and local regulations.

1.5 SUBMITTALS

Submit the following in accordance with the contract documents:

SD-01 Preconstruction Submittals

Existing Conditions

SD-07 Certificates

Notification

1.6 QUALITY ASSURANCE

Submit timely notification of renovation projects to Federal, State, regional, and local authorities in accordance with 40 CFR 61, Subpart M. Notify the appropriate authorities and the Contracting Officer in writing 10 working days prior to the commencement of work in accordance with 40 CFR 61, Subpart M. Comply with federal, state, and local hauling and disposal regulations. In addition to the requirements of the "Contract Clauses," conform to the safety requirements contained in ASSE/SAFE A10.6. Comply with the Environmental Protection Agency requirements specified.

1.6.1 Dust and Debris Control

Prevent the spread of dust and debris and avoid the creation of a nuisance or hazard in the surrounding area. Do not use water if it results in hazardous or objectionable conditions such as, but not limited to, flooding, or pollution.

1.7 PROTECTION

1.7.1 Traffic Control Signs

a. Where pedestrian and driver safety is endangered in the area of removal work, use traffic barricades with flashing lights. Anchor barricades in a manner to prevent displacement by wind. Notify the Contracting Officer prior to beginning such work.

1.8 RELOCATIONS

Perform the removal and reinstallation of relocated items as indicated with workmen skilled in the trades involved. Repair or replace items to be relocated which are damaged by the Contractor with new undamaged items as approved by the Contracting Officer.

1.9 EXISTING CONDITIONS

Before beginning any demolition or deconstruction work, survey the site and examine the drawings and specifications to determine the extent of the work. Record existing conditions in the presence of the Contracting Officer showing the condition of structures and other facilities adjacent to areas of alteration or removal. Photographs sized 4 x 4 inch or 600 x 800 pixels will be acceptable as a record of existing conditions. Include in the record condition of existing roof penetrations, equipment supports, curbs, edge flashing and the location and extent of existing cracks and other damage and description of surface conditions that exist prior to before starting work. It is the Contractor's responsibility to verify and document all required outages which will be required during the course of work, and to note these outages on the record document. Submit survey results on a CD with digital images sorted into folders for each building.

PART 2 PRODUCTS

Not used. PART 3 EXECUTION

3.1 EXISTING FACILITIES TO BE REMOVED

3.1.1 Structures

Locate demolition and deconstruction equipment when removing materials so as to not impose excessive loads to existing framing or supporting structure.

3.1.2 Utilities and Related Equipment

3.1.2.1 General Requirements

Do not interrupt existing utilities serving occupied or used facilities, except when authorized in writing by the Contracting Officer. Do not interrupt existing utilities serving facilities occupied and used by the Government except when approved in writing and then only after temporary utility services have been approved and provided.

3.1.3 Roofing

Remove existing roof system and associated components in their entirety down to existing roof slab. Remove roofing system without damaging the roof slab. Sequence work to minimize building exposure between demolition or deconstruction and new roof materials installation.

3.1.3.1 Temporary Roofing

Install temporary roofing and flashing as necessary to maintain a watertight condition throughout the course of the work. Remove temporary work prior to installation of permanent roof system materials unless approved otherwise by the Contracting Officer.

3.1.3.2 Reroofing

When removing the existing roofing system from the roof slab, remove only as much roofing as can be recovered by the end of the work day, unless approved otherwise by the Contracting Officer. Do not attempt to open the

roof covering system in threatening weather. Reseal all openings prior to suspension of work the same day.

3.1.4 Miscellaneous Metal

Salvage shop-fabricated items such as access doors and frames, steel gratings, metal ladders, and similar items as whole units. Salvage light-gage and cold-formed metal framing, such as roofing and siding, and similar items. Scrap metal shall become the Contractor's property. Recycle scrap metal as part of demolition and deconstruction operations. Provide separate containers to collect scrap metal and transport to a scrap metal collection or recycling facility, in accordance with the Waste Management Plan.

3.1.5 Patching

Where removals leave holes and damaged surfaces exposed in the finished work, patch and repair these holes and damaged surfaces to match adjacent finished surfaces, using on-site materials when available. Where new work is to be applied to existing surfaces, perform removals and patching in a manner to produce surfaces suitable for receiving new work. Finished surfaces of patched area shall be flush with the adjacent existing surface and shall match the existing adjacent surface as closely as possible as to texture and finish. Patching shall be as specified and indicated, and shall include:

- a. Concrete and Masonry: Completely fill holes and depressions, caused by previous physical damage or left as a result of removals in existing masonry walls to remain, with an approved masonry patching material, applied in accordance with the manufacturer's printed instructions.

3.1.6 Air Conditioning Equipment

Remove air conditioning, refrigeration, and other equipment containing refrigerants without releasing chlorofluorocarbon refrigerants to the atmosphere in accordance with the Clean Air Act Amendment of 1990. Recover all refrigerants prior to removing air conditioning, refrigeration, and other equipment containing refrigerants and dispose of in accordance with the paragraph entitled "Disposal of Ozone Depleting Substance (ODS)."

3.1.7 Mechanical Equipment and Fixtures

Disconnect mechanical hardware at the nearest connection to existing services to remain, unless otherwise noted. Disconnect mechanical equipment and fixtures at fittings. Remove service valves attached to the unit. Do not remove equipment until approved. Do not offer low-efficiency equipment for reuse; provide to recycling service for disassembly and recycling of parts.

3.1.7.1 Preparation for Storage

Remove water, dirt, dust, and foreign matter from units; tanks, piping and fixtures shall be drained; interiors, if previously used to store flammable, explosive, or other dangerous liquids, shall be steam cleaned. Seal openings with caps, plates, or plugs. Secure motors attached by flexible connections to the unit. Change lubricating systems with the proper oil or grease.

3.1.7.2 Piping

Disconnect piping at unions, flanges and valves, and fittings as required to reduce the pipe into straight lengths for practical storage. Store salvaged piping according to size and type. If the piping that remains can become pressurized due to upstream valve failure, end caps, blind flanges, or other types of plugs or fittings with a pressure gage and bleed valve shall be attached to the open end of the pipe to ensure positive leak control. Carefully dismantle piping that previously contained gas, gasoline, oil, or other dangerous fluids, with precautions taken to prevent injury to persons and property. Store piping outdoors until all fumes and residues are removed. Box prefabricated supports, hangers, plates, valves, and specialty items according to size and type. Classify piping not designated for salvage, or not reusable, as scrap metal.

3.1.7.3 Ducts

Classify removed duct work as scrap metal.

3.1.7.4 Fixtures, Motors and Machines

Remove and salvage fixtures, motors and machines associated with plumbing, heating, air conditioning, refrigeration, and other mechanical system installations. Salvage, box and store auxiliary units and accessories with the main motor and machines. Tag salvaged items for identification, storage, and protection from damage.

3.1.8 Electrical Equipment and Fixtures

Salvage motors, motor controllers, and operating and control equipment that are attached to the driven equipment. Salvage wiring systems and components. Box loose items and tag for identification. Disconnect primary, secondary, control, communication, and signal circuits at the point of attachment to their distribution system.

3.1.8.1 Electrical Devices

Remove and salvage switches, switchgear, transformers, conductors including wire and nonmetallic sheathed and flexible armored cable, regulators, meters, instruments, plates, circuit breakers, panelboards, outlet boxes, and similar items. Box and tag these items for identification according to type and size.

3.1.8.2 Conduit and Miscellaneous Items

Salvage conduit except where embedded in concrete or masonry. Consider corroded, bent, or damaged conduit as scrap metal. Sort straight and undamaged lengths of conduit according to size and type. Classify supports, knobs, tubes, cleats, and straps as debris to be removed and disposed.

3.1.9 Items With Unique/Regulated Disposal Requirements

Remove and dispose of items with unique or regulated disposal requirements in the manner dictated by law or in the most environmentally responsible manner.

3.2 DISPOSITION OF MATERIAL

3.2.1 Title to Materials

Except for salvaged items specified in related Sections, and for materials or equipment scheduled for salvage, all materials and equipment removed shall become the property of the Contractor and shall be removed from Government property. Title to materials resulting from demolition and deconstruction, and materials and equipment to be removed, is vested in the Contractor upon approval by the Contracting Officer of the Contractor's demolition, deconstruction, and removal procedures, and authorization by the Contracting Officer to begin demolition and deconstruction. Removed existing membrane is to be recycled. The Government will not be responsible for the condition or loss of, or damage to, such property after contract award. Showing for sale or selling materials and equipment on site is prohibited.

3.2.2 Disposal of Ozone Depleting Substance (ODS)

Class I and Class II ODS are defined in Section, 602(a) and (b), of The Clean Air Act. Prevent discharge of Class I and Class II ODS to the atmosphere. Place recovered ODS in cylinders meeting AHRI Guideline K suitable for the type ODS (filled to no more than 80 percent capacity) and provide appropriate labeling. Recovered ODS shall be removed from Government property and disposed of in accordance with 40 CFR 82. Products, equipment and appliances containing ODS in a sealed, self-contained system (e.g. residential refrigerators and window air conditioners) shall be disposed of in accordance with 40 CFR 82. Submit Receipts or bills of lading, as specified. Submit a shipping receipt or bill of lading for all containers of ozone depleting substance (ODS) shipped to the Defense Depot, Richmond, Virginia.

3.2.2.1 Special Instructions

No more than one type of ODS is permitted in each container. A warning/hazardous label shall be applied to the containers in accordance with Department of Transportation regulations. All cylinders including but not limited to fire extinguishers, spheres, or canisters containing an ODS shall have a tag with the following information:

- a. Activity name and unit identification code
- b. Activity point of contact and phone number
- c. Type of ODS and pounds of ODS contained
- d. Date of shipment
- e. National stock number (for information, call (804) 279-4525).

3.2.3 Transportation Guidance

Ship all ODS containers in accordance with MIL-STD-129, DLA 4145.25 (also referenced one of the following: Army Regulation 700-68, Naval Supply Instruction 4440.128C, Marine Corps Order 10330.2C, and Air Force Regulation 67-12), 49 CFR 173.301, and DOD 4000.25-1-M.

3.2.4 Unsalvageable and Non-Recyclable Material

Dispose of unsalvageable and non-recyclable combustible material off the site .

3.3 CLEANUP

Remove debris and rubbish from basement and similar excavations. Remove and transport the debris in a manner that prevents spillage on streets or adjacent areas. Apply local regulations regarding hauling and disposal.

3.4 DISPOSAL OF REMOVED MATERIALS

3.4.1 Regulation of Removed Materials

Dispose of debris, rubbish, scrap, and other nonsalvageable materials resulting from removal operations with all applicable federal, state and local regulations.

3.4.2 Burning on Government Property

Burning of materials removed from demolished and deconstructed structures will not be permitted on Government property .

3.4.3 Removal to Spoil Areas on Government Property

Transport noncombustible materials removed from demolition and deconstruction structures to designated spoil areas on Government property.

3.4.4 Removal from Government Property

Transport waste materials removed from demolished and deconstructed structures, except waste soil, from Government property for legal disposal. Dispose of waste soil as directed.

3.5 REUSE OF SALVAGED ITEMS

Recondition salvaged materials and equipment designated for reuse before installation. Replace items damaged during removal and salvage operations or restore them as necessary to usable condition.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 02 - EXISTING CONDITIONS

SECTION 02 83 13.00 20

LEAD IN CONSTRUCTION

08/11

PART 1 GENERAL

- 1.1 REFERENCES
- 1.2 DEFINITIONS
 - 1.2.1 Action Level
 - 1.2.2 Area Sampling
 - 1.2.3 Contaminated Room
 - 1.2.4 Decontamination Shower Facility
 - 1.2.5 High Efficiency Particulate Arrestor (HEPA) Filter Equipment
 - 1.2.6 Lead
 - 1.2.7 Lead Control Area
 - 1.2.8 Lead Permissible Exposure Limit (PEL)
 - 1.2.9 Material Containing Lead/Paint with Lead (MCL/PWL)
 - 1.2.10 Personal Sampling
 - 1.2.11 Physical Boundary
- 1.3 DESCRIPTION
 - 1.3.1 Description of Work
 - 1.3.2 Coordination with Other Work
- 1.4 SUBMITTALS
- 1.5 QUALITY ASSURANCE
 - 1.5.1 Qualifications
 - 1.5.1.1 Competent Person (CP)
 - 1.5.1.2 Training Certification
 - 1.5.1.3 Testing Laboratory
 - 1.5.1.4 Third Party Consultant Qualifications
 - 1.5.2 Requirements
 - 1.5.2.1 Competent Person (CP) Responsibilities
 - 1.5.2.2 Lead Compliance Plan
 - 1.5.2.3 Occupational and Environmental Assessment Data Report
 - 1.5.2.4 Medical Examinations
 - 1.5.2.5 Training
 - 1.5.2.6 Respiratory Protection Program
 - 1.5.2.7 Hazard Communication Program
 - 1.5.2.8 Lead Waste Management
 - 1.5.2.9 Environmental, Safety and Health Compliance
 - 1.5.3 Pre-Construction Conference
- 1.6 EQUIPMENT
 - 1.6.1 Respirators
 - 1.6.2 Special Protective Clothing
 - 1.6.3 Rental Equipment Notification
 - 1.6.4 Vacuum Filters
 - 1.6.5 Equipment for Government Personnel
- 1.7 PROJECT/SITE CONDITIONS
 - 1.7.1 Protection of Existing Work to Remain

PART 2 PRODUCTS

PART 3 EXECUTION

3.1 PREPARATION

3.1.1 Protection

3.1.1.1 Notification

3.1.1.2 Lead Control Area

3.1.1.3 Decontamination Shower Facility

3.1.1.4 Eye Wash Station

3.1.1.5 Mechanical Ventilation System

3.1.1.6 Personnel Protection

3.2 ERECTION

3.2.1 Lead Control Area Requirements

3.3 APPLICATION

3.3.1 Lead Work

3.3.2 Paint with Lead or Material Containing Lead Removal

3.3.2.1 Paint with Lead or Material Containing Lead - Indoor Removal

3.3.2.2 Paint with Lead or Material Containing Lead - Outdoor
Removal

3.3.3 Personnel Exiting Procedures

3.4 FIELD QUALITY CONTROL

3.4.1 Tests

3.4.1.1 Air Sampling Employee Exposure

3.4.1.2 Testing of Material Containing Lead Residue

3.5 CLEANING AND DISPOSAL

3.5.1 Cleanup

3.5.1.1 Clearance Certification

3.5.2 Disposal

3.5.2.1 Disposal Documentation

3.5.2.2 Payment for Hazardous Waste

-- End of Section Table of Contents --

SECTION 02 83 13.00 20

LEAD IN CONSTRUCTION
08/11

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN INDUSTRIAL HYGIENE ASSOCIATION (AIHA)

AIHA Z88.6 (2006) Respiratory Protection - Respirator Use-Physical Qualifications for Personnel

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

29 CFR 1926.103	Respiratory Protection
29 CFR 1926.21	Safety Training and Education
29 CFR 1926.33	Access to Employee Exposure and Medical Records
29 CFR 1926.55	Gases, Vapors, Fumes, Dusts, and Mists
29 CFR 1926.59	Hazard Communication
29 CFR 1926.62	Lead
29 CFR 1926.65	Hazardous Waste Operations and Emergency Response
40 CFR 260	Hazardous Waste Management System: General
40 CFR 261	Identification and Listing of Hazardous Waste
40 CFR 262	Standards Applicable to Generators of Hazardous Waste
40 CFR 263	Standards Applicable to Transporters of Hazardous Waste
40 CFR 264	Standards for Owners and Operators of Hazardous Waste Treatment, Storage, and Disposal Facilities
40 CFR 265	Interim Status Standards for Owners and Operators of Hazardous Waste Treatment, Storage, and Disposal Facilities
40 CFR 268	Land Disposal Restrictions

- 40 CFR 745 Lead-Based Paint Poisoning Prevention in Certain Residential Structures
- 49 CFR 172 Hazardous Materials Table, Special Provisions, Hazardous Materials Communications, Emergency Response Information, and Training Requirements
- 49 CFR 178 Specifications for Packagings

UNDERWRITERS LABORATORIES (UL)

- UL 586 (2009; Reprint Sep 2014) Standard for High-Efficiency Particulate, Air Filter Units

1.2 DEFINITIONS

1.2.1 Action Level

Employee exposure, without regard to use of respirators, to an airborne concentration of lead of 30 micrograms per cubic meter of air averaged over an 8 hour period.

1.2.2 Area Sampling

Sampling of lead concentrations within the lead control area and inside the physical boundaries which is representative of the airborne lead concentrations but is not collected in the breathing zone of personnel (approximately 5 to 6 feet above the floor).

1.2.3 Contaminated Room

Refers to a room for removal of contaminated personal protective equipment (PPE).

1.2.4 Decontamination Shower Facility

That facility that encompasses a clean clothing storage room, and a contaminated clothing storage and disposal rooms, with a shower facility in between.

1.2.5 High Efficiency Particulate Arrestor (HEPA) Filter Equipment

HEPA filtered vacuuming equipment with a UL 586 filter system capable of collecting and retaining lead-contaminated particulate. A high efficiency particulate filter demonstrates at least 99.97 percent efficiency against 0.3 micron or larger size particles.

1.2.6 Lead

Metallic lead, inorganic lead compounds, and organic lead soaps. Excludes other forms of organic lead compounds.

1.2.7 Lead Control Area

A system of control methods to prevent the spread of lead dust, paint chips or debris to adjacent areas that may include temporary containment, floor or ground cover protection, physical boundaries, and warning signs to

prevent unauthorized entry of personnel. HEPA filtered local exhaust equipment may be used as engineering controls to further reduce personnel exposures or building/outdoor environmental contamination.

1.2.8 Lead Permissible Exposure Limit (PEL)

Fifty micrograms per cubic meter of air as an 8 hour time weighted average as determined by 29 CFR 1926.62. If an employee is exposed for more than eight hours in a work day, the PEL shall be determined by the following formula:

$$\text{PEL (micrograms/cubic meter of air)} = 400/\text{No. hrs worked per day}$$

1.2.9 Material Containing Lead/Paint with Lead (MCL/PWL)

Any material, including paint, which contains lead as determined by the testing laboratory using a valid test method. The requirements of this section does not apply if no detectable levels of lead are found using a quantitative method for analyzing paint or MCL using laboratory instruments with specified limits of detection (usually 0.01 percent).

1.2.10 Personal Sampling

Sampling of airborne lead concentrations within the breathing zone of an employee to determine the 8 hour time weighted average concentration in accordance with 29 CFR 1926.62. Samples shall be representative of the employees' work tasks. Breathing zone shall be considered an area within a hemisphere, forward of the shoulders, with a radius of 6 to 9 inches and centered at the nose or mouth of an employee.

1.2.11 Physical Boundary

Area physically roped or partitioned off around lead control area to limit unauthorized entry of personnel.

1.3 DESCRIPTION

1.3.1 Description of Work

Construction activities impacting PWL or material containing lead which are covered by this specification include the demolition and/or removal of material containing lead in poor condition, located as required to safely complete this project.

1.3.2 Coordination with Other Work

The contractor shall coordinate with work being performed in adjacent areas. Coordination procedures shall be explained in the Plan and shall describe how the Contractor will prevent lead exposure to other contractors and/or Government personnel performing work unrelated to lead activities.

1.4 SUBMITTALS

Approval is required for submittals with a "G" designation; submittals not having a "G" designation are for Contractor Quality Control approval. Submit the following in accordance with the contract requirements:

SD-01 Preconstruction Submittals

Occupational and Environmental Assessment Data Report (if objective data is used to justify excluding the initial occupational exposure assessment); G

Lead Compliance Plan including CP approval (signature, date, and certification number); G

Competent Person qualifications; G

Training Certification of workers and supervisors; G

lead waste management plan; G

written evidence that TSD is approved for lead disposal; G

Certification of Medical Examinations; G

SD-06 Test Reports

sampling results; G

Occupational and Environmental Assessment Data Report; G

SD-07 Certificates

Testing laboratory qualifications; G

Occupant Notification; G

Third party consultant qualifications; G

Clearance Certification; G

SD-11 Closeout Submittals

Completed and signed hazardous waste manifest from treatment or disposal facility; G

Waste turn-in documents or weight tickets for non-hazardous wastes that are disposed of at sanitary or construction and demolition landfills; G

1.5 QUALITY ASSURANCE

1.5.1 Qualifications

1.5.1.1 Competent Person (CP)

Submit name, address, and telephone number of the CP selected to perform responsibilities specified in paragraph entitled "Competent Person (CP) Responsibilities." Provide documented construction project-related experience with implementation of OSHA's Lead in Construction standard (29 CFR 1926.62) which shows ability to assess occupational and environmental exposure to lead, experience with the use of respirators, personal protective equipment and other exposure reduction methods to protect employee health. Submit proper documentation that the CP is trained and licensed and certified in accordance with federal, State and local laws. The competent person shall be a licensed lead-based paint abatement Supervisor/Project Designer in the State of Hawaii.

1.5.1.2 Training Certification

Submit a certificate for each worker and supervisor, signed and dated by the training provider, stating that the employee has received the required lead training specified in 29 CFR 1926.62(1) .

1.5.1.3 Testing Laboratory

Submit the name, address, and telephone number of the testing laboratory selected to perform the air analysis, testing, and reporting of airborne concentrations of lead. Use a laboratory that is a successful participant in the Environmental Lead Proficiency Analytical Testing (ELPAT) program to perform sample analysis.

1.5.1.4 Third Party Consultant Qualifications

Submit the name, address and telephone number of the third party consultant selected to perform the wipe sampling for determining concentrations of lead in dust. Submit proper documentation that the consultant is trained and certified as an inspector technician or inspector/risk assessor by the USEPA authorized State (or local) certification and accreditation program.

1.5.2 Requirements

1.5.2.1 Competent Person (CP) Responsibilities

- a. Verify training meets all federal, State, and local requirements.
- b. Review and approve Lead Compliance Plan for conformance to the applicable referenced standards.
- c. Continuously inspect PWL or MCL work for conformance with the approved plan.
- d. Perform (or oversee performance of) air sampling. Recommend upgrades or downgrades (whichever is appropriate based on exposure) on the use of PPE (respirators included) and engineering controls.
- e. Ensure work is performed in strict accordance with specifications at all times.
- f. Control work to prevent hazardous exposure to human beings and to the environment at all times.
- g. Supervise final cleaning of the lead control area, take clearance wipe samples if necessary; review clearance sample results and make recommendations for further cleaning.
- h. Certify the conditions of the work as called for elsewhere in this specification.

1.5.2.2 Lead Compliance Plan

Submit a detailed job-specific plan of the work procedures to be used in the disturbance of PWL or MCL. The plan shall include a sketch showing the location, size, and details of lead control areas, critical barriers, physical boundaries, location and details of decontamination facilities,

viewing ports, and mechanical ventilation system. Include a description of equipment and materials, work practices, controls and job responsibilities for each activity from which lead is emitted. Include in the plan, eating, drinking, smoking, hygiene facilities and sanitary procedures, interface of trades, sequencing of lead related work, collected waste water and dust containing lead and debris, air sampling, respirators, personal protective equipment, and a detailed description of the method of containment of the operation to ensure that lead is not released outside of the lead control area. Include site preparation, cleanup and clearance procedures. Include occupational and environmental sampling, training and strategy, sampling and analysis strategy and methodology, frequency of sampling, duration of sampling, and qualifications of sampling personnel in the air sampling portion of the plan. Include a description of arrangements made among contractors on multicontractor worksites to inform affected employees and to clarify responsibilities to control exposures.

The plan shall be developed by a certified planner/project designer in the State of Hawaii.

In occupied buildings, the plan shall also include an occupant protection program that describes the measures that will be taken during the work to notify and protect the building occupants.

1.5.2.3 Occupational and Environmental Assessment Data Report

If initial monitoring is necessary, submit occupational and environmental sampling results to the Contracting Officer within three working days of collection, signed by the testing laboratory employee performing the analysis, the employee that performed the sampling, and the CP.

In order to reduce the full implementation of 29 CFR 1926.62, the Contractor shall provide documentation. Submit a report that supports the determination to reduce full implementation of the requirements of 29 CFR 1926.62 and supporting the Lead Compliance Plan.

- a. The initial monitoring shall represent each job classification, or if working conditions are similar to previous jobs by the same employer, provide previously collected exposure data that can be used to estimate worker exposures per 29 CFR 1926.62. The data shall represent the worker's regular daily exposure to lead for stated work.
- b. The initial assessment shall determine the requirement for further monitoring and the need to fully implement the control and protective requirements including the lead compliance plan per 29 CFR 1926.62.

1.5.2.4 Medical Examinations

Initial medical surveillance as required by 29 CFR 1926.62 shall be made available to all employees exposed to lead at any time (1 day) above the action level. Full medical surveillance shall be made available to all employees on an annual basis who are or may be exposed to lead in excess of the action level for more than 30 days a year or as required by 29 CFR 1926.62. Adequate records shall show that employees meet the medical surveillance requirements of 29 CFR 1926.33, 29 CFR 1926.62 and 29 CFR 1926.103. Provide medical surveillance to all personnel exposed to lead as indicated in 29 CFR 1926.62. Maintain complete and accurate medical records of employees for the duration of employment plus 30 years.

1.5.2.5 Training

Train each employee performing work that disturbs lead, who performs MCL/PWL disposal, and air sampling operations prior to the time of initial job assignment and annually thereafter, in accordance with 29 CFR 1926.21, 29 CFR 1926.62, and State and local regulations where appropriate.

1.5.2.6 Respiratory Protection Program

- a. Provide each employee required to wear a respirator a respirator fit test at the time of initial fitting and at least annually thereafter as required by 29 CFR 1926.62.
- b. Establish and implement a respiratory protection program as required by AIHA Z88.6, 29 CFR 1926.103, 29 CFR 1926.62, and 29 CFR 1926.55.

1.5.2.7 Hazard Communication Program

Establish and implement a Hazard Communication Program as required by 29 CFR 1926.59.

1.5.2.8 Lead Waste Management

The Lead Waste Management Plan shall comply with applicable requirements of federal, State, and local hazardous waste regulations. and address:

- a. Identification and classification of wastes associated with the work.
- b. Estimated quantities of wastes to be generated and disposed of.
- c. Names and qualifications of each contractor that will be transporting, storing, treating, and disposing of the wastes. Include the facility location and operator and a 24-hour point of contact. Furnish two copies of USEPA hazardous waste permits manifests and USEPA Identification numbers.
- d. Names and qualifications (experience and training) of personnel who will be working on-site with hazardous wastes.
- e. List of waste handling equipment to be used in performing the work, to include cleaning, volume reduction, and transport equipment.
- f. Spill prevention, containment, and cleanup contingency measures including a health and safety plan to be implemented in accordance with 29 CFR 1926.65.
- g. Work plan and schedule for waste containment, removal and disposal. Proper containment of the waste includes using acceptable waste containers (e.g., 55-gallon drums) as well as proper marking/labeling of the containers. Wastes shall be cleaned up and containerized daily.
- h. Include any process that may alter or treat waste rendering a hazardous waste non hazardous.
- i. Unit cost for hazardous waste disposal according to this plan.

1.5.2.9 Environmental, Safety and Health Compliance

In addition to the detailed requirements of this specification, comply with laws, ordinances, rules, and regulations of federal, State, and local authorities regarding lead. Comply with the applicable requirements of the current issue of 29 CFR 1926.62. Submit matters regarding interpretation of standards to the Contracting Officer for resolution before starting work. Where specification requirements and the referenced documents vary, the most stringent requirement shall apply.

1.5.3 Pre-Construction Conference

Along with the CP, meet with the Contracting Officer to discuss in detail the Lead Waste Management Plan and the Lead Compliance Plan, including procedures and precautions for the work.

1.6 EQUIPMENT

1.6.1 Respirators

Furnish appropriate respirators approved by the National Institute for Occupational Safety and Health (NIOSH), Department of Health and Human Services, for use in atmospheres containing lead dust, fume and mist. Respirators shall comply with the requirements of 29 CFR 1926.62.

1.6.2 Special Protective Clothing

Furnish personnel who will be exposed to lead-contaminated dust with proper disposable protective whole body clothing, head covering, gloves, eye, and foot coverings as required by 29 CFR 1926.62. Furnish proper disposable plastic or rubber gloves to protect hands. Reduce the level of protection only after obtaining approval from the CP.

1.6.3 Rental Equipment Notification

If rental equipment is to be used during PWL or MCL handling and disposal, notify the rental agency in writing concerning the intended use of the equipment.

1.6.4 Vacuum Filters

UL 586 labeled HEPA filters.

1.6.5 Equipment for Government Personnel

Furnish the Contracting Officer with four complete sets of personal protective equipment (PPE) daily, as required herein, for entry into and inspection of the lead removal work within the lead controlled area. Personal protective equipment shall include disposable whole body covering, including appropriate foot, head, eye, and hand protection. PPE shall remain the property of the Contractor. The Government will provide respiratory protection for the Contracting Officer.

1.7 PROJECT/SITE CONDITIONS

1.7.1 Protection of Existing Work to Remain

Perform work without damage or contamination of adjacent areas. Where

existing work is damaged or contaminated, restore work to its original condition or better as determined by the Contracting Officer.

PART 2 PRODUCTS

Not used.

PART 3 EXECUTION

3.1 PREPARATION

3.1.1 Protection

3.1.1.1 Notification

a. Notify the Contracting Officer 20 days prior to the start of any lead work.

b. Occupant Notification

Submit occupant written acknowledgment of the delivery of lead hazard information pamphlet (EPA 747-K-99-001 "Protect Your Family From Lead in Your Home") prior to commencing the renovation work for each affected unit using language provided in 40 CFR 745 Subpart E.

3.1.1.2 Lead Control Area

a. Physical Boundary - Provide physical boundaries around the lead control area by roping off the area designated in the work plan or providing curtains, portable partitions or other enclosures to ensure that lead will not escape outside of the lead control area.

b. Warning Signs - Provide warning signs at approaches to lead control areas. Locate signs at such a distance that personnel may read the sign and take the necessary precautions before entering the area. Signs shall comply with the requirements of 29 CFR 1926.62.

3.1.1.3 Decontamination Shower Facility

Provide clean and contaminated change rooms and shower facilities in accordance with this specification and 29 CFR 1926.62.

3.1.1.4 Eye Wash Station

Where eyes may be exposed to injurious corrosive materials, suitable facilities for quick drenching or flushing of the eyes shall be provided within the work area.

3.1.1.5 Mechanical Ventilation System

a. To the extent feasible, use local exhaust ventilation or other collection systems, approved by the CP. Local exhaust ventilation systems shall be evaluated and maintained in accordance with 29 CFR 1926.62.

b. Vent local exhaust outside the building and away from building

ventilation intakes or ensure system is connected to HEPA filters.

3.1.1.6 Personnel Protection

Personnel shall wear and use protective clothing and equipment as specified herein. Eating, smoking, or drinking or application of cosmetics is not permitted in the lead control area. No one will be permitted in the lead control area unless they have been appropriately trained and provided with protective equipment.

3.2 ERECTION

3.2.1 Lead Control Area Requirements

Establish a lead control area by completely establishing barriers and physical boundaries around the area or structure where PWL or MCL removal operations will be performed.

3.3 APPLICATION

3.3.1 Lead Work

Perform lead work in accordance with approved Lead Compliance Plan. Use procedures and equipment required to limit occupational exposure and environmental contamination with lead when the work is performed in accordance with 29 CFR 1926.62 , and as specified herein. Dispose of all PWL or MCL and associated waste in compliance with federal, State, and local requirements.

3.3.2 Paint with Lead or Material Containing Lead Removal

Manual or power sanding or grinding of lead surfaces or materials is not permitted unless tools are equipped with HEPA attachments or wet methods. The dry sanding or grinding of surfaces that contain lead is prohibited. Provide methodology for removing lead in the Lead Compliance Plan. Select lead removal processes to minimize contamination of work areas outside the control area with lead-contaminated dust or other lead-contaminated debris or waste and to ensure that unprotected personnel are not exposed to hazardous concentrations of lead. Describe this removal process in the Lead Compliance Plan.

3.3.2.1 Paint with Lead or Material Containing Lead - Indoor Removal

Perform manual removal in the lead control areas using enclosures, barriers or containments . Collect residue debris for disposal in accordance with federal, State, and local requirements.

3.3.2.2 Paint with Lead or Material Containing Lead - Outdoor Removal

Perform outdoor removal as indicated in federal, State, and local regulations and in the Lead Compliance Plan. The worksite preparation (barriers or containments) shall be job dependent and presented in the Lead Compliance Plan.

3.3.3 Personnel Exiting Procedures

Whenever personnel exit the lead-controlled area, they shall perform the following procedures and shall not leave the work place wearing any

clothing or equipment worn in the control area:

- a. Vacuum all clothing before entering the contaminated change room.
- b. Remove protective clothing in the contaminated change room, and place them in an approved impermeable disposal bag.
- c. Wash hands and face at the site, don appropriate disposable or uncontaminated reusable clothing, move to an appropriate shower facility, shower.
- d. Change to clean clothes prior to leaving the clean clothes storage area.

3.4 FIELD QUALITY CONTROL

3.4.1 Tests

3.4.1.1 Air Sampling Employee Exposure

Conduct sampling for lead in accordance with 29 CFR 1926.62 and as specified herein.

- a. Collect personal air samples on employees who are anticipated to have the greatest risk of exposure. In addition, collect air samples on at least twenty-five percent of the work crew or a minimum of two employees, whichever is greater, during each work shift.
- b. Submit results of air samples within 72 hours after the air samples are taken.

3.4.1.2 Testing of Material Containing Lead Residue

Test residue in accordance with 40 CFR 261 for hazardous waste.

3.5 CLEANING AND DISPOSAL

3.5.1 Cleanup

Maintain surfaces of the lead control area free of accumulations of dust and debris. Restrict the spread of dust and debris; keep waste from being distributed over the work area. Do not dry sweep or use pressurized air to clean up the area. At the end of each shift and when the lead operation has been completed, clean the controlled area of visible contamination by vacuuming with a HEPA filtered vacuum cleaner, wet mopping the area and wet wiping the area as indicated by the Lead Compliance Plan. Reclean areas showing dust or debris. After visible dust and debris is removed, wet wipe and HEPA vacuum all surfaces in the controlled area. If adjacent areas become contaminated at any time during the work, clean, visually inspect, and then wipe sample all contaminated areas. The CP shall then certify in writing that the area has been cleaned of lead contamination before clearance testing.

3.5.1.1 Clearance Certification

The CP shall certify in writing that air samples collected outside the lead control area during paint removal operations are less than 30 micrograms per cubic meter of air; the respiratory protection used for the employees was adequate; the work procedures were performed in accordance with

29 CFR 1926.62; and that there were no visible accumulations of material and dust containing lead left in the work site. Do not remove the lead control area or roped off boundary and warning signs prior to the Contracting Officer's acknowledgement of receipt of the CP certification.

Clear the lead control area in industrial facilities of all visible dust and debris.

For exterior work, soil samples taken at the exterior of the work site shall be used to determine if soil lead levels had increased at a statistically significant level (significant at the 95 percent confidence limit) from the soil lead levels prior to the operation. If soil lead levels either show a statistically significant increase above soil lead levels prior to work or soil lead levels above any applicable federal or state standard for lead in soil, the soil shall be remediated.

3.5.2 Disposal

- a. All material, whether hazardous or non-hazardous shall be disposed in accordance with all laws and provisions and all federal, State or local regulations. Ensure all waste is properly characterized. The result of each waste characterization (TCLP for RCRA materials) will dictate disposal requirements.
- b. Contractor is responsible for segregation of waste. Collect lead-contaminated waste, scrap, debris, bags, containers, equipment, and lead-contaminated clothing that may produce airborne concentrations of lead particles. Label the containers in accordance with 29 CFR 1926.62 and 40 CFR 261.
- c. Dispose of lead-contaminated material classified as hazardous waste at an EPA approved hazardous waste treatment, storage, or disposal facility off Government property.
- d. Store waste materials in U.S. Department of Transportation (49 CFR 178) approved 55 gallon drums. Properly label each drum to identify the type of waste (49 CFR 172) and the date the drum was filled. For hazardous waste, the collection drum requires marking/labeling in accordance with 40 CFR 262 during the accumulation/collection timeframe. The Contracting Officer or an authorized representative will assign an area for interim storage of waste-containing drums. Do not store hazardous waste drums in interim storage longer than 90 calendar days from the date affixed to each drum.
- e. Handle, store, transport, and dispose lead or lead-contaminated waste in accordance with 40 CFR 260, 40 CFR 261, 40 CFR 262, 40 CFR 263, 40 CFR 264, and 40 CFR 265. Comply with land disposal restriction notification requirements as required by 40 CFR 268.

3.5.2.1 Disposal Documentation

Submit written evidence to demonstrate the hazardous waste treatment, storage, or disposal facility (TSD) is approved for lead disposal by the EPA, State or local regulatory agencies. Submit one copy of the completed hazardous waste manifest, signed and dated by the initial transporter in accordance with 40 CFR 262. Contractor shall provide a certificate that the waste was accepted by the disposal facility. Provide turn-in documents

or weight tickets for non-hazardous waste disposal.

3.5.2.2 Payment for Hazardous Waste

Payment for disposal of hazardous and non-hazardous waste will not be made until a signed copy of the manifest from the treatment or disposal facility certifying the amount of lead-containing materials or non-hazardous waste delivered is returned and a copy is furnished to the Government.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 07 - THERMAL AND MOISTURE PROTECTION

SECTION 07 22 00

ROOF AND DECK INSULATION

08/11

PART 1 GENERAL

- 1.1 REFERENCES
- 1.2 SUBMITTALS
- 1.3 MANUFACTURER'S CERTIFICATE
- 1.4 QUALITY ASSURANCE
 - 1.4.1 Insulation on Concrete Decks
 - 1.4.2 Insulation for Cool Roofing
- 1.5 DELIVERY, STORAGE, AND HANDLING
 - 1.5.1 Delivery
 - 1.5.2 Storage and Handling
- 1.6 ENVIRONMENTAL CONDITIONS

PART 2 PRODUCTS

- 2.1 INSULATION
 - 2.1.1 Insulation Types
 - 2.1.2 Insulation Thickness
 - 2.1.3 Tapered Roof Insulation
 - 2.1.4 Cants and Tapered Edge Strips
- 2.2 PROTECTION BOARD
 - 2.2.1 Glass Mat Gypsum Roof Board
- 2.3 Adhesive
- 2.4 MOISTURE CONTROL
- 2.5 WOOD NAILERS

PART 3 EXECUTION

- 3.1 EXAMINATION AND PREPARATION
 - 3.1.1 Surface Inspection
 - 3.1.2 Surface Preparation
- 3.2 INSULATION INSTALLATION
 - 3.2.1 Special Precautions for Installation of Foam Insulation
 - 3.2.1.1 Polyisocyanurate Insulation
 - 3.2.2 Cant Strips
 - 3.2.3 Tapered Edge Strips
- 3.3 PROTECTION
 - 3.3.1 Protection of Applied Insulation
 - 3.3.2 Damaged Work and Materials
- 3.4 INSPECTION

-- End of Section Table of Contents --

SECTION 07 22 00

ROOF AND DECK INSULATION
08/11

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM C1177/C1177M (2013) Standard Specification for Glass Mat Gypsum Substrate for Use as Sheathing

ASTM C1289 (2014a) Standard Specification for Faced Rigid Cellular Polyisocyanurate Thermal Insulation Board

ASTM D4263 (1983; R 2012) Indicating Moisture in Concrete by the Plastic Sheet Method

ASTM E84 (2014) Standard Test Method for Surface Burning Characteristics of Building Materials

FM GLOBAL (FM)

FM P9513 (2002) Specialist Data Book Set for Roofing Contractors; contains 1-22 (2001), 1-28 (2002), 1-29 (2002), 1-28R/1-29R (1998), 1-30 (2000), 1-31 (2000), 1-32 (2000), 1-33 (2000), 1-34 (2001), 1-49 (2000), 1-52 (2000), 1-54 (2001)

1.2 SUBMITTALS

Submit the following in accordance with submittal procedures:

SD-02 Shop Drawings

Wood nailers

Taper cants and crickets

SD-03 Product Data

Adhesive

Insulation

Certification

SD-06 Test Reports

Flame spread and smoke developed ratings

Submit in accordance with ASTM E84.

SD-07 Certificates

Installer qualifications

SD-08 Manufacturer's Instructions

Adhesive

Roof insulation, including field of roof and perimeter attachment requirements.

1.3 MANUFACTURER'S CERTIFICATE

Submit certificate from the insulation manufacturer attesting that the installer has the proper qualifications for installing tapered roof insulation systems.

1.4 QUALITY ASSURANCE

1.4.1 Insulation on Concrete Decks

1.4.2 Insulation for Cool Roofing

Provide thermal insulation above the roof deck with an R value of 15.

1.5 DELIVERY, STORAGE, AND HANDLING

1.5.1 Delivery

Deliver materials to site in manufacturer's unopened and undamaged standard commercial containers bearing the following legible information:

- a. Name of manufacturer;
 - b. Brand designation;
 - c. Specification number, type, and class, as applicable, where materials are covered by a referenced specification; and
- Deliver materials in sufficient quantity to allow continuity of the work.

1.5.2 Storage and Handling

Store and handle materials in a manner to protect from damage, exposure to open flame or other ignition sources, and from wetting, condensation or moisture absorption. Store in an enclosed building or trailer that provides a dry, adequately ventilated environment. Replace damaged material with new material.

1.6 ENVIRONMENTAL CONDITIONS

Do not install roof insulation during inclement weather or when air temperature is below 40 degrees F and interior humidity is 45 percent or

greater, or when there is visible ice, frost, or moisture on the roof deck.

PART 2 PRODUCTS

2.1 INSULATION

2.1.1 Insulation Types

Roof insulation shall be one or an assembly of a maximum of three of the following materials and compatible with attachment methods for the specified insulation and roof membrane:

- b. Polyisocyanurate Board: ASTM C1289 Type II, fibrous felt or glass mat membrane both sides, except minimum compressive strength shall be 25 pounds per square inch (psi).

2.1.2 Insulation Thickness

As necessary to provide a thermal resistance (R value) of 15 or more . Thickness shall be based on the "R" value for aged insulation. .

2.1.3 Tapered Roof Insulation

Provide tapered insulation with 1:12 slope at crickets as indicated. Identify each piece of tapered insulation board by color or other identity coding system, allowing the identification of different sizes of tapered insulation board required to complete the roof insulation system.

]2.1.4 Cants and Tapered Edge Strips

Provide preformed cants and tapered edge strips of the same material as the roof insulation; or, when roof insulation material is unavailable, provide pressure-preservative treated wood, wood fiberboard, or rigid perlite board cants and edge strips as recommended by the roofing manufacturer, unless otherwise indicated. Face of cant strips shall have incline of 45 degrees and vertical height of 4 inches. Taper edge strips at a rate of one to 1 1/2 inch per foot down to approximately 1/8 inch thick.

2.2 PROTECTION BOARD

For use as a thermal barrier (underlayment), fire barrier (overlayment), or protection board for hot-mopped, torched-down, or adhesively-applied roofing membrane over roof insulation.

2.2.1 Glass Mat Gypsum Roof Board

ASTM C1177/C1177M, 0 Flame Spread and 0 Smoke Developed when tested in accordance with ASTM E84, 500 psi, Class A, non-combustible, 1/2 inch thick, 4 by 8 feet board size.

2.3 Adhesive

Low volatile organic compound (VOC) adhesive as supplied by roof membrane manufacturer in Section 07 53 23 and recommended by the manufacturer's printed data for bonding insulation and protection board to substrate materials. Do not use bonding adhesive to bond membrane materials to each other.

2.4 MOISTURE CONTROL

2.5 WOOD NAILERS

Pressure-preservative-treated.

PART 3 EXECUTION

3.1 EXAMINATION AND PREPARATION

3.1.1 Surface Inspection

Surfaces shall be clean, smooth, and dry. Check roof deck surfaces, including surfaces sloped to roof drains and outlets, for defects before starting work.

The Contractor shall inspect and approve the surfaces immediately before starting installation. Prior to installing insulation, perform the following:

Prior to installing any roof system on a concrete deck, conduct a test per ASTM D4263. The deck is acceptable for roof system application when there is no visible moisture on underside of plastic sheet after 24 hours.

3.1.2 Surface Preparation

Correct defects and inaccuracies in roof deck surface to eliminate poor drainage and hollow or low spots and perform the following:

- a. Install wood nailers the same thickness as insulation at eaves, edges, curbs, walls, and roof openings for securing cant strips, gravel stops, and flashing flanges. Space nailers in accordance with approved shop drawings.

3.2 INSULATION INSTALLATION

Apply insulation in two layers with staggered joints when total required thickness of insulation exceeds 1/2 inch. Lay insulation so that continuous longitudinal joints are perpendicular to direction of roofing, as specified in Section 07 53 23 and end joints of each course are staggered with those of adjoining courses. When using multiple layers of insulation, joints of each succeeding layer shall be parallel and offset in both directions with respect to layer below. Keep insulation 1/2 inch clear of vertical surfaces penetrating and projecting from roof surface.

3.2.1 Special Precautions for Installation of Foam Insulation

3.2.1.1 Polyisocyanurate Insulation

Where polyisocyanurate foam board insulation is provided, install 1/2 inch thick wood fiberboard, glass mat gypsum roof board, or 3/4 inch thick expanded perlite board insulation over top surface of foam board insulation. Stagger joints of insulation with respect to foam board insulation below.

3.2.2 Cant Strips

Where indicated, provide cant strips at intersections of roof with walls, parapets, and curbs extending above roof. Wood cant strips shall bear on and be anchored to wood blocking. Fit cant strips flush against vertical surfaces. Where possible, nail cant strips to adjoining surfaces. Where cant strips are installed against non-nailable materials, install in an approved adhesive.

3.2.3 Tapered Edge Strips

Where indicated, provide edge strips in the right angle formed by junction of roof and wood nailing strips that extend above level of roof. Install edge strips flush against vertical surfaces of wood nailing strips. Where possible, nail edge strips to adjoining surfaces. Where installed against non-nailable materials, install in an approved adhesive.

3.3 PROTECTION

3.3.1 Protection of Applied Insulation

Completely cover each day's installation of insulation with the finished roofing specified in 07 53 23 on same day. Do not permit phased construction. Protect open spaces between insulation and parapets or other walls and spaces at curbs, scuttles, and expansion joints, until permanent roofing and flashing are applied. Do not permit storing, walking, wheeling, or trucking directly on insulation or on roofed surfaces. Provide smooth, clean board or plank walkways, runways, and platforms near supports, as necessary, to distribute weight to conform to indicated live load limits of roof construction. Exposed edges of the insulation shall be protected by cutoffs at the end of each work day or whenever precipitation is imminent. Cutoffs shall be 2 layers of bituminous-saturated felt set in plastic bituminous cement or EPDM membrane set in roof cement. Fill all profile voids in cut-offs to prevent entrapping of moisture into the area below the membrane. Cutoffs shall be removed when work is resumed.

3.3.2 Damaged Work and Materials

Restore work and materials that become damaged during construction to original condition or replace with new materials.

3.4 INSPECTION

The Contractor shall establish and maintain an inspection procedure to assure compliance of the installed roof insulation with the contract requirements. Any work found not to be in compliance with the contract shall be promptly removed and replaced or corrected in an approved manner. Quality control shall include, but not be limited to, the following:

- a. Observation of environmental conditions; number and skill level of insulation workers; start and end time of work.
- b. Verification of certification, listing or label compliance with FM P9513.
- c. Verification of proper storage and handling of insulation and vapor retarder materials before, during, and after installation.
- d. Inspection of vapor retarder application, including edge envelopes and

mechanical fastening.

- e. Inspection of mechanical fasteners; type, number, length, and spacing.
- f. Coordination with other materials, cants, sleepers, and nailing strips.
- g. Inspection of insulation joint orientation and laps between layers, joint width and bearing of edges of insulation on deck.
- h. Installation of cutoffs and proper joining of work on subsequent days.
- i. Continuation of complete roofing system installation to cover insulation installed same day.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 07 - THERMAL AND MOISTURE PROTECTION

SECTION 07 53 23

ETHYLENE-PROPYLENE-DIENE-MONOMER ROOFING

05/12

PART 1 GENERAL

- 1.1 REFERENCES
- 1.2 DESCRIPTION OF ROOF MEMBRANE SYSTEM
- 1.3 SUBMITTALS
 - 1.3.1 Shop Drawings
- 1.4 QUALITY ASSURANCE
 - 1.4.1 Qualification of Manufacturer
 - 1.4.2 Qualification of Applicator
 - 1.4.3 Qualifications of Photovoltaics (PV) Rooftop Applicator
 - 1.4.4 Fire Resistance
 - 1.4.5 Wind Uplift Resistance
 - 1.4.6 Preroofing Conference
- 1.5 DELIVERY, STORAGE, AND HANDLING
 - 1.5.1 Delivery
 - 1.5.2 Storage
 - 1.5.3 Handling
- 1.6 ENVIRONMENTAL REQUIREMENTS
- 1.7 SEQUENCING
- 1.8 WARRANTY
 - 1.8.1 Roof Membrane Manufacturer Warranty
 - 1.8.2 Roofing System Installer Warranty
 - 1.8.3 Continuance of Warranty
- 1.9 CONFORMANCE AND COMPATIBILITY
- 1.10 ELIMINATION, PREVENTION OF FALL HAZARDS
 - 1.10.1 Fall Protection
- 1.11 COOL ROOFS

PART 2 PRODUCTS

- 2.1 MATERIALS
 - 2.1.1 EPDM Sheet
 - 2.1.2 Seam Tape
 - 2.1.3 Lap Splice Adhesive
 - 2.1.4 Bonding Adhesive
 - 2.1.5 Lap Cleaner, Lap Sealant, and Edge Treatment
 - 2.1.6 Water Cutoff Mastic/Water Block
 - 2.1.7 Membrane Flashings and Flashing Accessories
 - 2.1.7.1 Flashing Tape
 - 2.1.8 Pre-Manufactured Accessories
 - 2.1.9 Rubber Walkboards
 - 2.1.9.1 Rubber Pavers
 - 2.1.10 Roof Insulation Below EPDM Sheet
 - 2.1.11 Photovoltaic (PV) Systems - Rack Mounted Systems
 - 2.1.12 Wood Products

PART 3 EXECUTION

- 3.1 EXAMINATION
- 3.2 APPLICATION
 - 3.2.1 Special Precautions
 - 3.2.2 EPDM Sheet Roofing
 - 3.2.3 Application Method
 - 3.2.3.1 Fully Adhered Membrane Application
 - 3.2.4 Tape Seams / Lap Splices
 - 3.2.5 Adhesive Seams / Lap Splices
 - 3.2.6 Perimeter Attachment
- 3.3 FLASHINGS
 - 3.3.1 General
 - 3.3.2 Membrane Flashing
 - 3.3.3 PRE-FABRICATED CURBS
 - 3.3.4 Set-On Accessories
- 3.4 ROOF WALKPADS
 - 3.4.1 Paver System
- 3.5 CORRECTION OF DEFICIENCIES
- 3.6 CLEAN UP
- 3.7 PROTECTION OF APPLIED ROOFING
 - 3.7.1 Water Cutoffs
 - 3.7.2 Temporary Flashing for Permanent Roofing
 - 3.7.3 Temporary Walkways, Runways, and Platforms
- 3.8 FIELD QUALITY CONTROL
 - 3.8.1 Construction Monitoring
 - 3.8.2 Manufacturer's Inspection
- 3.9 INSTRUCTIONS TO GOVERNMENT PERSONNEL
- 3.10 INFORMATION CARD

-- End of Section Table of Contents --

SECTION 07 53 23

ETHYLENE-PROPYLENE-DIENE-MONOMER ROOFING
05/12

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN SOCIETY OF CIVIL ENGINEERS (ASCE)

ASCE 7 (2010; Errata 2011; Supp 1 2013) Minimum Design Loads for Buildings and Other Structures

ASTM INTERNATIONAL (ASTM)

ASTM D4637/D4637M (2014; E 2014) EPDM Sheet Used in Single-Ply Roof Membrane

ASTM D4811/D4811M (2006; E 2013; R 2013) Nonvulcanized (Uncured) Rubber Sheet Used as Roof Flashing

ASTM D6369 (1999; R 2006) Design of Standard Flashing Details for EPDM Roof Membranes

ASTM E108 (2011) Fire Tests of Roof Coverings

FM GLOBAL (FM)

FM 4470 (2010) Single-Ply, Polymer-Modified Bitumen Sheet, Built-up Roof (BUR), and Liquid Applied Roof Assemblies for Use in Class 1 and Noncombustible Roof Deck Construction

FM APP GUIDE (updated on-line) Approval Guide <http://www.approvalguide.com/>

NATIONAL ROOFING CONTRACTORS ASSOCIATION (NRCA)

NRCA RoofMan (2011 thru 2014) The NRCA Roofing Manual

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

29 CFR 1910 Occupational Safety and Health Standards

UNDERWRITERS LABORATORIES (UL)

UL 790 (2004; Reprint Jul 2014) Standard Test Methods for Fire Tests of Roof Coverings

UL RMSD

(2012) Roofing Materials and Systems
Directory

1.2 DESCRIPTION OF ROOF MEMBRANE SYSTEM

Combination fully adhered EPDM roof membrane system applied over insulation concrete roof deck substrate.

1.3 SUBMITTALS

Submit the following in accordance with submittal procedures:

SD-02 Shop Drawings

Roof Plan Drawing

Wind Load Calculations

Boundaries of Enhanced Perimeter

Corner Attachments of Roof System Components

Location of Perimeter Half-Sheets

Spacing of Perimeter, Corner, and Infield Fasteners

Slopes

SD-03 Product Data

EPDM Sheet

Seam Tape

Bonding Adhesive

Lap Splice Adhesive

Water Cutoff Mastic/Water Block

Lap Cleaner, Lap Sealant, and Edge Treatment

Flashings

Flashing Accessories

Flashing Tape

Fasteners and Plates

Roof Insulation

Protection Mat

Pre-Manufactured Accessories

Sample warranty certificate;

Submit all data required together with requirements of this

section. Include a written acceptance by the roof membrane manufacturer of the insulation and other products and accessories to be provided. List products in the applicable wind uplift and fire rating classification listings, unless approved otherwise by the Contracting Officer.

SD-05 Design Data

Wind Uplift Calculations;

Engineering calculations validating the wind resistance of roof system.

SD-07 Certificates

Qualification of Manufacturer

Certify that the manufacturer of the roof membrane meets requirements specified under paragraph entitled "Qualification of Manufacturer."

Qualification of Applicator

Certify that the applicator meets requirements specified under paragraph entitled "Qualification of Applicator."

Wind Uplift Resistance classification, as applicable

Fire Resistance classification

Submit the roof system assembly wind uplift and fire rating classification listings.

SD-08 Manufacturer's Instructions

Application

Application Method

Membrane Flashing

Seam Tape

Tape Seams / Lap Splices

Adhesive Seams / Lap Splices

Perimeter Attachment

Primer

Fasteners

Protection Mat

Pre-Manufactured Accessories

Include detailed application instructions and standard manufacturer drawings altered as required by these specifications.

Explicitly identify in writing, differences between manufacturer's printed instructions and the specified requirements.

SD-11 Closeout Submittals

Warranty

Instructions To Government Personnel

Include copies of Material Safety Data Sheets for maintenance/repair materials.

1.3.1 Shop Drawings

Roof plan drawing depicting wind load calculations and boundaries of enhanced perimeter and corner attachments of roof system components, location of perimeter half-sheets, as applicable. The drawing must reflect the project roof plan of each roof level and conditions indicated. Provide all slopes.

1.4 QUALITY ASSURANCE

1.4.1 Qualification of Manufacturer

EPDM sheet roofing membrane manufacturer must have at least 5 years experience in manufacturing EPDM roofing products.

1.4.2 Qualification of Applicator

Roofing system applicator must be approved, authorized, or licensed in writing by the roof membrane manufacturer and must have a minimum of three years experience as an approved, authorized, or licensed applicator with that manufacturer and be approved at a level capable of providing the specified warranty. The applicator must supply the names, locations and client contact information of 5 projects of similar size and scope that the applicator has constructed using the manufacturer's roofing products submitted for this project within the previous three years.

1.4.3 Qualifications of Photovoltaics (PV) Rooftop Applicator

The PV rooftop applicator must be approved, authorized, or certified by a Roof Integrated Solar Energy (RISE) Certified Solar Roofing Professional (CSRP), and comply with applicable codes, standards, and regulatory requirements to maintain the weatherproofing abilities of both the integrated roof system and photovoltaic system.

1.4.4 Fire Resistance

Complete roof covering assembly must:

- a. Be Class A rated in accordance with ASTM E108, FM 4470, or UL 790; and
- b. Be listed as part of Fire-Classified roof deck construction in the UL RMSD or Class I roof deck construction in the FM APP GUIDE.

FM or UL approved components of the roof covering assembly must bear the appropriate FM or UL label.

1.4.5 Wind Uplift Resistance

The complete roof system assembly shall be rated and installed to resist wind loads calculated in accordance with ASCE 7 and validated by uplift resistance testing in accordance with Factory Mutual (FM) test procedures. Do not install non-rated systems except as approved by the Contracting Officer. Submit licensed engineer's wind uplift calculations and substantiating data to validate any non-rated roof system. Base wind uplift measurements based on a design wind speed as indicated in accordance with ASCE 7 and/or other applicable building code requirements. See wind uplift resistance plan at the end of this section.

1.4.6 Preroofing Conference

After approval of submittals and before performing roofing and insulation system installation work, hold a preroofing conference to review the following:

- a. Drawings, specifications and submittals related to the roof work;
- b. Roof system components installation;
- c. Procedure for the roof manufacturer's technical representative's onsite inspection and acceptance of the roofing substrate, the name of the manufacturer's technical representatives, the frequency of the onsite visits, distribution of copies of the inspection reports from the manufacturer's technical representative;
- d. Contractor's plan for coordination of the work of the various trades involved in providing the roofing system and other components secured to the roofing; and
- e. Quality control plan for the roof system installation;
- f. Safety requirements.

Coordinate preroofing conference scheduling with the Contracting Officer. The conference must be attended by the Contractor, the Contracting Officer's designated personnel, personnel directly responsible for the installation of roofing and insulation, flashing and sheet metal work, mechanical and electrical work, other trades interfacing with the roof work, and representative of the roofing materials manufacturer. Before beginning roofing work, provide a copy of meeting notes and action items to all attending parties. Note action items requiring resolution prior to start of roof work.

1.5 DELIVERY, STORAGE, AND HANDLING

1.5.1 Delivery

Deliver materials in their original, unopened containers or wrappings with labels intact and legible. Where materials are covered by a referenced specification number, the labels must bear the specification number, type, class, and shelf life expiration date where applicable. Deliver materials in sufficient quantity to allow continuity of work.

1.5.2 Storage

Store and protect materials from damage and weather in accordance with

manufacturer's printed instructions, except as specified otherwise. Keep materials clean and dry. Store and maintain adhesives, sealants, primers and other liquid materials above 60 degrees F. Insulated hot boxes or other enclosed warming devices must be required in cold weather. Mark and remove damaged materials from the site. Use pallets to support and canvas tarpaulins to completely cover material materials stored outdoors. Do not use polyethylene as a covering. Locate materials temporarily stored on the roof in approved areas, and distribute the load to stay within the live load limits of the roof construction. Remove unused materials from the roof at the end of each days work.

1.5.3 Handling

Prevent damage to edges and ends of roll materials. Do not install damaged materials in the work. Select and operate material handling equipment so as not to damage materials or applied roofing. Do not use materials contaminated by exposure or moisture. Remove contaminated materials from the site. When hazardous materials are involved, adhere to the special precautions of the manufacturer. Adhesives may contain petroleum distillates and may be extremely flammable; prevent personnel from breathing vapors, and do not use near sparks or open flame.

1.6 ENVIRONMENTAL REQUIREMENTS

Do not install EPDM sheet roofing during high winds or inclement weather, or when there is moisture, or visible dampness on the substrate surface, or when condensation develops on surfaces during application. Unless recommended otherwise by the EPDM sheet manufacturer and approved by the Contracting Officer, do not install EPDM sheet when air temperature is within 5 degrees F of the dewpoint.

1.7 SEQUENCING

Coordinate the work with other trades to ensure that components which are to be secured to or stripped into the roofing system are available and that permanent flashing and counterflashing are installed as the work progresses. Ensure temporary protection measures are in place to preclude moisture intrusion or damage to installed materials. Application of roofing must immediately follow application of insulation as a continuous operation. Coordinate roofing operations with insulation work so that all roof insulation applied each day is covered with roof membrane installation the same day.

1.8 WARRANTY

Provide roof system material and workmanship warranties meeting specified requirements. Provide revision or amendment to standard membrane manufacturer warranty as required to comply with the specified requirements. Minimum manufacturer warranty shall have no dollar limit, cover full system water-tightness, and shall have a minimum duration of 20 years.

1.8.1 Roof Membrane Manufacturer Warranty

Furnish the roof membrane manufacturer's 20 year no dollar limit roof system materials and installation workmanship warranty, including flashing, insulation, roof curbs, and accessories necessary for a watertight roof system construction. The warranty must run directly to the Government and commence at time of Government's acceptance of the roof work. The warranty

must state that:

- a. If within the warranty period the roof system, as installed for its intended use in the normal climatic and environmental conditions of the facility, becomes non-watertight, shows evidence of moisture intrusion within the assembly, splits, tears, cracks, delaminates, separates at the seams, shrinks to the point of bridging or tenting membrane at transitions, or shows evidence of excessive weathering due to defective materials or installation workmanship, the repair or replacement of the defective and damaged materials of the roof system assembly and correction of defective workmanship must be the responsibility of the roof membrane manufacturer. The roof membrane manufacturer is responsible for all costs associated with the repair or replacement work.
- b. When the manufacturer or his approved applicator fail to perform the repairs within 72 hours of notification, emergency temporary repairs performed by others does not void the warranty.

1.8.2 Roofing System Installer Warranty

The roof system installer must warrant for a period of two years that the roof system, as installed, is free from defects in installation workmanship, to include the roof membrane, flashing, insulation, accessories, attachments, and sheet metal installation integral to a complete watertight roof system assembly. Write the warranty directly to the Government. The roof system installer is responsible for correction of defective workmanship and replacement of damaged or affected materials. The roof system installer is responsible for all costs associated with the repair or replacement work.

1.8.3 Continuance of Warranty

Approve repair or replacement work that becomes necessary within the warranty period and accomplish in a manner so as to restore the integrity of the roof system assembly and validity of the roof membrane manufacturer warranty for the remainder of the manufacturer warranty period.

1.9 CONFORMANCE AND COMPATIBILITY

The entire roofing and flashing system must be in accordance with specified and indicated requirements, including fire and wind resistance requirements. Work not specifically addressed and any deviation from specified requirements must be in general accordance with recommendations of the NRCA RoofMan, membrane manufacturer published recommendations and details, ASTM D6369, and compatible with surrounding components and construction. Submit any deviation from specified or indicated requirements to the Contracting Officer for approval prior to installation.

1.10 ELIMINATION, PREVENTION OF FALL HAZARDS

1.10.1 Fall Protection

Provide tieback anchors to meet 29 CFR 1910 and all other applicable safety codes, regulations and standards.

1.11 COOL ROOFS

Meet AHSRAE 90.1-2010 Chapter 5

PART 2 PRODUCTS

2.1 MATERIALS

Coordinate with other specification sections related to the roof work. Furnish a combination of specified materials that comprise a roof system acceptable to the roof membrane manufacturer and meeting specified requirements. Protect materials provided from defects and make suitable for the service and climatic conditions of the installation.

2.1.1 EPDM Sheet

Ethylene Propylene Diene Terpolymer (EPDM), ASTM D4637/D4637M, Type I, non-reinforced, 0.090 inch nominal thickness for fully adhered application. The minimum thickness must not be less than minus 10 percent of the specified thickness value. EPDM membrane thickness specified is exclusive of backing material on the EPDM membrane. Principal polymer used in manufacture of the membrane sheet must be greater than 95 percent EPDM. Width and length of sheet must be maximum width attainable as recommended by the manufacturer to minimize field formed seams in the field of the roof.

2.1.2 Seam Tape

Double-sided synthetic rubber tape, minimum 0.03 inch thick, minimum 3 inch wide. The roof membrane manufacturer must supply seam tape recommended by the manufacturer's printed data for forming watertight bond of EPDM sheet materials to each other for the application specified and conditions encountered. 6 inch wide tape is required for seam seals along lines of mechanical attachment of membrane.

2.1.3 Lap Splice Adhesive

Low volatile organic compound (VOC) synthetic rubber adhesive as supplied by roof membrane manufacturer and recommended by the manufacturer's printed data for forming watertight bond of EPDM sheet membrane materials to each other in areas of membrane flashing. Do not use splice adhesive to form membrane seams in field of roof or at standard base flashing conditions.

2.1.4 Bonding Adhesive

Low volatile organic compound (VOC) adhesive as supplied by roof membrane manufacturer and recommended by the manufacturer's printed data for bonding EPDM membrane materials to insulation, wood, metal, concrete or other substrate materials. Do not use bonding adhesive to bond membrane materials to each other.

2.1.5 Lap Cleaner, Lap Sealant, and Edge Treatment

As supplied by the roof membrane manufacturer and recommended by the manufacturer's printed data.

2.1.6 Water Cutoff Mastic/Water Block

As supplied by the roof membrane manufacturer and recommended by the manufacturer's printed data.

2.1.7 Membrane Flashings and Flashing Accessories

Membrane flashing, including self-adhering membrane flashing, perimeter flashing, flashing around roof penetrations, and prefabricated pipe seals, must be minimum 0.045 inch minimum cured EPDM, as recommended by the roof membrane manufacturer or minimum 0.055 inch thick uncured EPDM sheet in compliance with ASTM D4811/D4811M, Type I. Use cured EPDM membrane to the maximum extent recommended by the roof membrane manufacturer. Limit uncured flashing material to reinforcing inside and outside corners and angle changes in plane of membrane. Provide pourable sealer pockets, and other formed penetrations or unusually shaped conditions as recommended by the roof membrane manufacturer where the use of cured material is impractical.

2.1.7.1 Flashing Tape

EPDM-backed synthetic rubber tape, minimum 6 inch wide as supplied by the roof membrane manufacturer and recommended by the manufacturer's printed data.

2.1.8 Pre-Manufactured Accessories

Pre-manufactured accessories must be manufacturer's standard for intended purpose, compatible with the membrane roof system and approved for use by the roof membrane manufacturer.

2.1.9 Rubber Walkboards

Provide the following:

2.1.9.1 Rubber Pavers

Preformed reprocessed rubber interlocking pavers 24 x 24 x 2 inches (600 x 600 x 50 mm) provided or approved by manufacturer for use with roof membrane.

2.1.10 Roof Insulation Below EPDM Sheet

Insulation system and facer material must be compatible with membrane application specified and as approved by the roof membrane manufacturer.

2.1.11 Photovoltaic (PV) Systems - Rack Mounted Systems

The Contractor shall adhere to the following guidelines:

- a. Building Owners Guide to Roof-mounted PV Systems, published by NRCA.
- b. Guidelines for Roof-Mounted PV Systems, published by NRCA.

2.1.12 Wood Products

Do not allow fire retardant treated materials be in contact with EPDM membrane or EPDM accessory products, unless approved by the membrane manufacturer and the Contracting Officer.

PART 3 EXECUTION

3.1 EXAMINATION

Ensure that the following conditions exist prior to application of the roofing materials:

- a. curbs, perimeter walls, roof penetrating components, and equipment supports are in place.
- b. Surfaces are rigid, clean, dry, smooth, and free from cracks, holes, and sharp changes in elevation.
- c. The plane of the substrate does not vary more than 1/4 inch within an area 10 by 10 feet when checked with a 10 foot straight edge placed anywhere on the substrate.
- d. Substrate is sloped to provide positive drainage.
- e. Walls and vertical surfaces are constructed to receive counterflashing, and will permit mechanical fastening of the base flashing materials.
- f. Treated wood nailers are in place on non-nailable surfaces, to permit nailing of base flashing at minimum height of 8 inch above finished roofing surface.
- g. Pressure-preservative treated wood nailers are fastened in place at eaves, gable ends, openings, and intersections with vertical surfaces for securing of membrane, edging strips, attachment flanges of sheet metal, and roof fixtures. Surface-applied nailers are the same thickness as the roof insulation.
- h. Avoid contact of EPDM materials with fire retardant treated wood, except as approved by the roof membrane manufacturer and Contracting Officer.
- i. Cants are securely fastened in place in the angles formed by walls and other vertical surfaces. The angle of the cant is 45 degrees and the height of the vertical leg is not less than 3-1/2 inch.

3.2 APPLICATION

Apply entire EPDM sheet utilizing fully adhered application method. Apply roofing materials as specified herein unless approved otherwise by the Contracting Officer.

3.2.1 Special Precautions

- a. Do not dilute coatings or sealants unless specifically recommended by the materials manufacturer's printed application instructions. Do not thin liquid materials with cleaners used for cleaning EPDM sheet.
- b. Keep liquids in airtight containers, and keep containers closed except when removing materials.
- c. Use liquid components, including adhesives, within their shelf life period. Store adhesives at 60 to 80 degrees F prior to use. Avoid excessive adhesive application and adhesive spills, as they can be destructive to some elastomeric sheets and insulations; follow adhesive

manufacturer's printed application instructions. Mix and use liquid components in accordance with label directions and manufacturer's printed instructions.

- d. Provide clean, dry cloths or pads for applying membrane cleaners and cleaning of membrane
- e. Do not use heat guns or open flame to expedite drying of adhesives or primers.
- f. Require workmen and others who walk on the membrane to wear clean, soft-soled shoes to avoid damage to roofing materials.
- g. Do not use equipment with sharp edges which could puncture the EPDM sheet.
- h. Shut down air intakes and any related mechanical systems and seal open vents and air intakes when applying solvent-based materials in the area of the opening or intake. Coordinate shutdowns with the Contracting Officer.

3.2.2 EPDM Sheet Roofing

Provide a watertight roof membrane sheet free of contaminants and defects that might affect serviceability. Provide a uniform, straight, and flat edge. Unroll EPDM sheet roofing in position without stretching membrane. Inspect for holes. Remove sections of EPDM sheet roofing that are damaged. Allow sheets to relax minimum 30 minutes before seaming. Lap sheets as specified, to shed water, and as recommended by the roof membrane manufacturer's published installation instructions for the application required but not less than 3 inch in any case.

3.2.3 Application Method

3.2.3.1 Fully Adhered Membrane Application

Layout membrane and side lap adjoining sheets in accordance with membrane manufacturer's printed installation instructions. Allow for sufficient membrane to form proper membrane terminations. Remove dusting agents and dirt from membrane and substrate areas where bonding adhesives are to be applied. Apply specified adhesive evenly and continuously to substrate and underside of sheets at rates recommended by the roof membrane manufacturer's printed application instructions. When adhesive is spray applied, roll with a paint roller to ensure proper contact and coverage. Do not apply bonding adhesive to surfaces of membrane in seam or lap areas. Allow adhesive to flash off or dry to consistency prescribed by manufacturer before adhering sheets to the substrate. Roll each sheet into adhesive slowly and evenly to avoid wrinkles; broom or roll the membrane to remove air pockets and fishmouths and to ensure full, continuous bonding of sheet to substrate. Form field lap splices or seams as specified. Check all seams and ensure full lap seal. Apply lap sealant to all adhesive formed seams and all cut edges of reinforced membrane materials.

3.2.4 Tape Seams / Lap Splices

Field form seams, or lap splices, with seam tape in accordance with membrane manufacturer's printed instructions and as specified. Lap seams with minimum 6 inches seam tape and stripped in with self-adhering, semi-cured EPDM cover strips. Clean and prime mating surfaces in the seam

area. After primer has dried or set in accordance with membrane manufacturer's instructions, apply seam tape to bottom membrane and roll with a 3 inch to 4 inch wide smooth silicone or steel hand roller, or other manufacturer approved rolling device, to ensure full contact and adhesion of tape to bottom membrane. Tape end laps must be minimum 1 inch. Roll top membrane into position to check for proper overlap and alignment. Remove release paper from top of seam tape and form seam splice. Ensure top membrane contact with seam tape as release paper is removed. Roll the closed seam with a smooth silicone or steel hand roller, rolling first across the width of the seam then along the entire length, being careful not to damage the membrane. Apply minimum 9 inch long strip of membrane-backed flashing tape over T-intersections of roof membrane. Roll tape to ensure full adhesion and seal over T-joint.

3.2.5 Adhesive Seams / Lap Splices

Use only field-applied adhesive formed seams in flashing areas where approved by the membrane manufacturer and the Contracting Officer. Do not use adhesive formed seams for field of roof membrane seaming. Thoroughly and completely clean mating surfaces of materials throughout the lap area. Remove all dirt, dust, and contaminants and allow to dry.

Apply primer as recommended by the membrane manufacturer. Apply splice adhesive with a 3 inch to 4 inch wide, 1/2 inch thick, solvent-resistant brush in a smooth, even coat with long brush strokes. Bleed out brush marks. Do not apply adhesive in a circular motion. Simultaneously apply adhesive to both mating surfaces in an approximate 0.025 to 0.030 inch wet film thickness, or other thickness as recommended by the roof membrane manufacturer's printed instructions.

Allow the splice adhesive to set-up in accordance with membrane manufacturer's printed instructions. Perform manufacturer recommended field check to test for adhesive readiness prior to closing seam. Apply a 1/8 inch to 1/4 inch bead of in-seam sealant approximately 1/2 inch from the inside edge of the lower membrane sheet prior to closing the seam. Ensure the in-seam sealant does not extend onto the splice adhesive. Maintain the full adhered seam width required. Roll the top membrane onto the mating surface. Roll the seam area with a 2 inch to 3 inch wide, smooth silicone or steel hand roller. A minimum of 2 hours after joining sheets and when the lap edge is dry, clean the lap edge with membrane manufacturer's recommended cleaner and apply a 1/4 inch to 3/8 inch bead of lap sealant centered on the seam edge. With a feathering tool, immediately feather the lap sealant to completely cover the splice edge, leaving a mound of sealant over the seam edge. Apply lap sealant to all adhesive formed seams.

3.2.6 Perimeter Attachment

Adhesive bond roof membrane sheet at roof perimeter in a manner to comply with wind resistance requirements and in accordance with membrane manufacturer's printed application instructions.

3.3 FLASHINGS

3.3.1 General

Provide flashings in the angles formed at walls and other vertical surfaces and where required to make the work watertight, except where metal flashings are indicated.

Provide a one-ply flashing membrane, as specified for the system used, and install immediately after the roofing membrane is placed and prior to finish coating where a finish coating is required. Flashings must be stepped where vertical surfaces abut sloped roof surfaces. Provide sheet metal reglet in which sheet metal cap flashings are installed of not more than 16 inch nor less than 8 inch above the roofing surfaces. Exposed joints and end laps of flashing membrane must be made and sealed in the manner required for roofing membrane.

3.3.2 Membrane Flashing

Install flashing and flashing accessories as the roof membrane is installed. Apply flashing to cleaned surfaces and as recommended by the roof membrane manufacturer and as specified. Utilize cured EPDM membrane flashing and prefabricated accessory flashings to the maximum extent recommended by the roof membrane manufacturer. Limit uncured flashing material to reinforcing inside and outside corners and angle changes in plane of membrane, and to flashing scuppers, pourable sealer pockets, and other formed penetrations or unusually shaped conditions as recommended by the roof membrane manufacturer where the use of cured material is impractical. Extend base flashing not less than 8 inch above roofing surface and as necessary to provide for seaming overlap on roof membrane as recommended by the roof membrane manufacturer.

Completely adhere flashing sheets in place. Seam flashing membrane in the same manner as roof membrane, except as otherwise recommended by the membrane manufacturer's printed instructions and approved by the Contracting Officer. Reinforce all corners and angle transitions by applying uncured membrane to the area in accordance with roof membrane manufacturer recommendations. Install sheet metal flashing over the termination bar in the completed work. Apply membrane liner over top of exposed nailers and blocking and to overlap top edge of base flashing installation at curbs, parapet walls, expansion joints and as otherwise indicated to serve as waterproof lining under sheet metal flashing components.

3.3.3 PRE-FABRICATED CURBS

Securely anchor prefabricated curbs to nailer or other base substrate and flashed with EPDM membrane flashing materials.

3.3.4 Set-On Accessories

Where pipe or conduit blocking, supports and similar roof accessories, or isolated paver block, are set on the membrane, adhere reinforced membrane or walkpad material, as recommended by the roof membrane manufacturer, to bottom of accessories prior to setting on roofing membrane. Specific method of installing set-on accessories must permit normal movement due to expansion, contraction, vibration, and similar occurrences without damaging roofing membrane. Do not mechanically secure set-on accessories through roofing membrane into roof deck substrate.

3.4 ROOF WALKPADS

Install walkpads at roof access points and where otherwise indicated for traffic areas and for access to mechanical equipment, in accordance with the roof membrane manufacturer's printed instructions. Provide minimum 6 inch separation between adjacent walkpads to accommodate drainage.

3.4.1 Paver System

Complete all membrane and membrane flashing work, including inspection and repair of all membrane and seams in the area of paver application prior to applying paver system.

3.5 CORRECTION OF DEFICIENCIES

Where any form of deficiency is found, additional measures must be taken as deemed necessary by the Contracting Officer to determine the extent of the deficiency and corrective actions must be as directed by the Contracting Officer.

3.6 CLEAN UP

Remove debris, scraps, containers and other rubbish and trash resulting from installation of the roofing system from job site each day.

3.7 PROTECTION OF APPLIED ROOFING

At the end of the day's work and when precipitation is imminent, protect applied membrane roofing system from water intrusion.

3.7.1 Water Cutoffs

Straighten insulation line using loose-laid cut insulation sheets and seal the terminated edge of the roof membrane system in an effective manner. Remove the water cut-offs to expose the insulation when resuming work, and remove the insulation sheets used for fill-in.

3.7.2 Temporary Flashing for Permanent Roofing

Provide temporary flashing at drains, curbs, walls and other penetrations and terminations of roofing sheets until permanent flashings can be applied. Remove temporary flashing before applying permanent flashing.

3.7.3 Temporary Walkways, Runways, and Platforms

Do not permit storing, walking, wheeling, and trucking directly on applied roofing materials. Provide temporary walkways, runways, and platforms of smooth clean boards, mats or planks as necessary to avoid damage to applied roofing materials, and to distribute weight to conform to live load limits of roof construction. Use rubber-tired equipment for roofing work.

3.8 FIELD QUALITY CONTROL

3.8.1 Construction Monitoring

During progress of the roof work, Contractor must make visual inspections as necessary to ensure compliance with specified parameters. Additionally, verify the following:

- a. Equipment is in working order. Metering devices are accurate.
- b. Materials are not installed in adverse weather conditions.
- c. Substrates are in acceptable condition, in compliance with specification, prior to application of subsequent materials.

Nailers and blocking are provided where and as needed.

Insulation substrate is smooth, properly secured to its substrate, and without excessive gaps prior to membrane application.

All materials are properly stored, handled and protected from moisture or other damages. Liquid components are properly mixed prior to application.

Membrane is allowed to relax prior to seaming. Adhesives are applied uniformly to both mating surfaces and checked for proper set prior to bonding mating materials. Mechanical attachments are spaced as required

Membrane is properly overlapped.

Membrane seaming is as specified and seams are hand rolled to ensure full adhesion and bond width. All seams are checked at the end of each work day.

Applied membrane is inspected and repaired as necessary prior to ballast installation.

Membrane is fully adhered without ridges, wrinkles, kinks, fishmouths.

Installer adheres to specified and detailed application parameters.

Associated flashings and sheet metal are installed in a timely manner in accord with the specified requirements.

Ballast is within the specified weight range.

Temporary protection measures are in place at the end of each work shift.

3.8.2 Manufacturer's Inspection

Manufacturer's technical representative must visit the site a minimum of three times during the installation for purposes of reviewing materials installation practices and adequacy of work in place. Inspections must occur during the pre-roofing conference, at mid-point of the installation, and at substantial completion, at a minimum. After each inspection, submit a report signed by the manufacturer's technical representative to the Contracting Officer within 3 working days. Note overall quality of work, deficiencies and any other concerns, and recommended corrective action.


3.9 INSTRUCTIONS TO GOVERNMENT PERSONNEL

Furnish written and verbal instructions on proper maintenance procedures to designated Government personnel. Furnish instructions by a competent representative of the roof membrane manufacturer and include a minimum of 4 hours on maintenance and emergency repair of the membrane. Include a demonstration of membrane repair, and give sources of required special tools. Furnish information on safety requirements during maintenance and emergency repair operations.

3.10 INFORMATION CARD

For each roof, furnish a typewritten information card for facility records and a photoengraved 0.032 inch thick aluminum card for exterior display. Card must be 8-1/2 by 11 inch minimum. Information card must identify facility name and number; location; contract number; approximate roof area; detailed roof system description, including deck type, membrane, number of plies, method of application, manufacturer, insulation and cover board system and thickness; presence of tapered insulation for primary drainage, presence of vapor retarder; date of completion; installing contractor identification and contact information; membrane manufacturer warranty expiration, warranty reference number, and contact information. Install card at roof top or access location as directed by the Contracting Officer and provide a paper copy to the Contracting Officer.

-- End of Section --

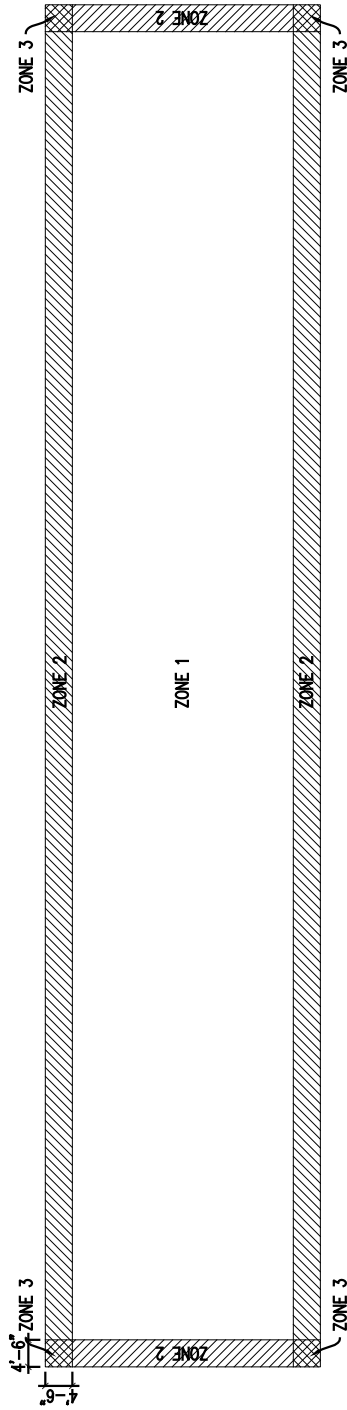

BUILDING 1784-ROOF NET WIND PRESSURE

THE ROOF WIND LOADS PRESENTED HERE ARE NET, UNFACTORED LOADS CALCULATED ON BASED ON THE FOLLOWING:

- * 2006 INTERNATIONAL BUILDING CODE, AS AMENDED BY THE CITY AND COUNTY OF HONOLULU
- * BASIC WIND SPEED - 105 MPH
- * COASTAL C EXPOSURE
- * WIND DIRECTIONALITY FACTOR, $K_d = 0.65$
- * TOPOGRAPHIC FACTOR, $K_{zt} = 1.20$
- * IMPORTANCE FACTOR, $I = 1.00$
- * INTERNAL PRESSURE COEFFICIENT, $G_{cpi} = +/- 0.55$ (PARTIALLY ENCLOSED STRUCTURE)
- * EXTERNAL PRESSURE COEFFICIENTS FOR COMPONENTS AND CLADDING OF A BUILDING LESS THAN 60' TALL WITH A FLAT, OR MONO-SLOPE ROOF WITH A PITCH OF LESS THAN 7 DEGREES.
- * 10 SQUARE FOOT TRIBUTARY AREA. MAY BE REDUCED FOR LARGER TRIBUTARY AREAS.

LOCATION	DESIGN WIND PRESSURE
ROOF ZONE 1	19.5 PSF INWARD
ROOF ZONE 2	35.5 PSF OUTWARD
ROOF ZONE 3	19.5 PSF INWARD
ROOF ZONE 3	53.8 PSF OUTWARD
ROOF ZONE 3	19.5 PSF INWARD
ROOF ZONE 3	76.7 PSF OUTWARD

SCALE: 1/32" = 1'-0"

SECTION TABLE OF CONTENTS

DIVISION 07 - THERMAL AND MOISTURE PROTECTION

SECTION 07 60 00

FLASHING AND SHEET METAL

08/08

PART 1 GENERAL

- 1.1 REFERENCES
- 1.2 GENERAL REQUIREMENTS
- 1.3 SUBMITTALS
- 1.4 DELIVERY, HANDLING, AND STORAGE

PART 2 PRODUCTS

- 2.1 MATERIALS
 - 2.1.1 Exposed Sheet Metal Items
 - 2.1.2 Drainage
 - 2.1.3 Stainless Steel
 - 2.1.4 Solder
 - 2.1.5 Bituminous Plastic Cement
 - 2.1.6 Roofing Felt
 - 2.1.7 Asphalt Primer
 - 2.1.8 Fasteners

PART 3 EXECUTION

- 3.1 INSTALLATION
 - 3.1.1 Workmanship
 - 3.1.2 Nailing
 - 3.1.3 Cleats
 - 3.1.4 Bolts, Rivets, and Screws
 - 3.1.5 Seams
 - 3.1.5.1 Flat-lock Seams
 - 3.1.5.2 Lap Seams
 - 3.1.5.3 Loose-Lock Expansion Seams
 - 3.1.5.4 Flat Seams
 - 3.1.6 Soldering
 - 3.1.6.1 Edges
 - 3.1.7 Protection from Contact with Dissimilar Materials
 - 3.1.7.1 Metal Surfaces
 - 3.1.7.2 Wood or Other Absorptive Materials
 - 3.1.8 Expansion and Contraction
 - 3.1.9 Base Flashing
 - 3.1.10 Counterflashing
 - 3.1.11 Metal Drip Edge
 - 3.1.12 Eave Flashing
 - 3.1.13 Expansion Joints
 - 3.1.14 Flashing at Roof Penetrations and Equipment Supports
 - 3.1.15 Single Pipe Vents
- 3.2 PAINTING
- 3.3 CLEANING

- 3.4 REPAIRS TO FINISH
- 3.5 FIELD QUALITY CONTROL
 - 3.5.1 Procedure

ATTACHMENTS:

Table II

-- End of Section Table of Contents --

SECTION 07 60 00

FLASHING AND SHEET METAL
08/08

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM A167	(2011) Standard Specification for Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
ASTM B32	(2008; R 2014) Standard Specification for Solder Metal
ASTM D226/D226M	(2009) Standard Specification for Asphalt-Saturated Organic Felt Used in Roofing and Waterproofing
ASTM D41/D41M	(2011) Asphalt Primer Used in Roofing, Dampproofing, and Waterproofing
ASTM D4586/D4586M	(2007; E 2012; R 2012) Asphalt Roof Cement, Asbestos-Free

SHEET METAL AND AIR CONDITIONING CONTRACTORS' NATIONAL ASSOCIATION (SMACNA)

SMACNA 1793	(2012) Architectural Sheet Metal Manual, 7th Edition
-------------	--

1.2 GENERAL REQUIREMENTS

Finished sheet metalwork will form a weathertight construction without waves, warps, buckles, fastening stresses or distortion, which allows for expansion and contraction. Sheet metal mechanic is responsible for cutting, fitting, drilling, and other operations in connection with sheet metal required to accommodate the work of other trades. Coordinate installation of sheet metal items used in conjunction with roofing with roofing work to permit continuous roofing operations.

1.3 SUBMITTALS

Submit the following in accordance with contract documents:

SD-02 Shop Drawings

Base flashing

Counterflashing

Flashing at roof penetrations

Copings

Drip edge

1.4 DELIVERY, HANDLING, AND STORAGE

Package and protect materials during shipment. Uncrate and inspect materials for damage, dampness, and wet-storage stains upon delivery to the job site. Remove from the site and replace damaged materials that cannot be restored to like-new condition. Handle sheet metal items to avoid damage to surfaces, edges, and ends. Store materials in dry, weather-tight, ventilated areas until immediately before installation.

PART 2 PRODUCTS

2.1 MATERIALS

Furnish sheet metal items in 8 to 10 foot lengths. Single pieces less than 8 feet long may be used to connect to factory-fabricated inside and outside corners, and at ends of runs. Factory fabricate corner pieces with minimum 12 inch legs. Provide accessories and other items essential to complete the sheet metal installation. Provide accessories made of the same or compatible materials as the items to which they are applied. Fabricate sheet metal items of the materials specified below and to the gage, thickness, or weight shown in Table I at the end of this section. Provide sheet metal items with mill finish unless specified otherwise. Where more than one material is listed for a particular item in Table I, each is acceptable and may be used except as follows:

2.1.1 Exposed Sheet Metal Items

Must be of the same material. Consider the following as exposed sheet metal: gutters, including hangers; downspouts; gravel stops and fascias; cap, valley, steeped, base, and eave flashings and related accessories.

2.1.2 Drainage

Do not use copper for an exposed item if drainage from that item will pass over exposed masonry, stonework or other metal surfaces. In addition to the metals listed in Table I, lead-coated copper may be used for such items.

2.1.3 Stainless Steel

24 gauge, ASTM A167, Type 302 or 304, 2D Finish, fully annealed, dead-soft temper.

2.1.4 Solder

ASTM B32, 95-5 tin-antimony.

2.1.5 Bituminous Plastic Cement

ASTM D4586/D4586M, Type I.

2.1.6 Roofing Felt

ASTM D226/D226M Type II.

2.1.7 Asphalt Primer

ASTM D41/D41M.

2.1.8 Fasteners

Use stainless steel fasteners.

PART 3 EXECUTION

3.1 INSTALLATION

3.1.1 Workmanship

Make lines and angles sharp and true. Free exposed surfaces from visible wave, warp, buckle, and tool marks. Fold back exposed edges neatly to form a 1/2 inch hem on the concealed side. Make sheet metal exposed to the weather watertight with provisions for expansion and contraction.

Make surfaces to receive sheet metal plumb and true, clean, even, smooth, dry, and free of defects and projections. For installation of items not shown in detail or not covered by specifications conform to the applicable requirements of SMACNA 1793, Architectural Sheet Metal Manual. Provide sheet metal flashing in the angles formed where roof decks abut walls, curbs, ventilators, pipes, or other vertical surfaces and wherever indicated and necessary to make the work watertight. Join sheet metal items together as shown in Table II.

3.1.2 Nailing

Confine nailing of sheet metal generally to sheet metal having a maximum width of 18 inch. Confine nailing of flashing to one edge only. Space nails evenly not over 3 inch on center and approximately 1/2 inch from edge unless otherwise specified or indicated. Face nailing will not be permitted. Where sheet metal is applied to other than wood surfaces, include in shop drawings, the locations for sleepers and nailing strips required to secure the work.

3.1.3 Cleats

Provide cleats for sheet metal 18 inch and over in width. Space cleats evenly not over 12 inch on center unless otherwise specified or indicated. Unless otherwise specified, provide cleats of 2 inch wide by 3 inch long and of the same material and thickness as the sheet metal being installed. Secure one end of the cleat with two nails and the cleat folded back over the nailheads. Lock the other end into the seam. Where the fastening is to be made to concrete or masonry, use screws and drive in expansion shields set in concrete or masonry. Pretin cleats for soldered seams.

3.1.4 Bolts, Rivets, and Screws

Install bolts, rivets, and screws where indicated or required. Provide compatible washers where required to protect surface of sheet metal and to provide a watertight connection. Provide mechanically formed joints in aluminum sheets 0.040 inch or less in thickness.

3.1.5 Seams

Straight and uniform in width and height with no solder showing on the face.

3.1.5.1 Flat-lock Seams

Finish not less than 3/4 inch wide.

3.1.5.2 Lap Seams

Finish soldered seams not less than one inch wide. Overlap seams not soldered, not less than 3 inch.

3.1.5.3 Loose-Lock Expansion Seams

Not less than 3 inch wide; provide minimum one inch movement within the joint. Completely fill the joints with the specified sealant, applied at not less than 1/8 inch thick bed.

3.1.5.4 Flat Seams

Make seams in the direction of the flow.

3.1.6 Soldering

Where soldering is specified, apply to stainless steel and stainless steel items. Pretin edges of sheet metal before soldering is begun. Seal the joints in aluminum sheets of 0.040 inch or less in thickness with specified sealants. Do not solder aluminum.

3.1.6.1 Edges

Flux brush the seams in before soldering. Treat with soldering acid flux the edges of stainless steel to be pretinned. Seal the joints in aluminum sheets of 0.040 inch or less in thickness with specified sealants.

3.1.7 Protection from Contact with Dissimilar Materials

3.1.7.1 Metal Surfaces

Paint surfaces in contact with mortar, concrete, or other masonry materials with alkali-resistant coatings such as heavy-bodied bituminous paint.

3.1.7.2 Wood or Other Absorptive Materials

Paint surfaces that may become repeatedly wet and in contact with metal with two coats of aluminum paint or a coat of heavy-bodied bituminous paint.

3.1.8 Expansion and Contraction

Provide expansion and contraction joints at at not more than 40 foot intervals. Provide an additional joint where the distance between the last expansion joint and the end of the continuous run is more than half the required interval. Space joints evenly.

3.1.9 Base Flashing

Extend up vertical surfaces of the flashing not less than 8 inch and not

less than 4 inch under the roof covering. Where finish wall coverings form a counterflashing, extend the vertical leg of the flashing up behind the applied wall covering not less than 6 inch. Overlap the flashing strips with the previously laid flashing not less than 3 inch. Fasten the strips at their upper edge to the deck. Horizontal flashing at vertical surfaces must extend vertically above the roof surface and fastened at their upper edge to the deck a minimum of 6 inch on center with a minimum of 2-inch lap of any surface. Solder end laps and provide for expansion and contraction. Extend the metal flashing over crickets at the up-slope side of curbs, and similar vertical surfaces extending through sloping roofs, the metal flashings. Extend the metal flashings onto the roof covering not less than 4.5 inch at the lower side of vertical surfaces extending through the roof decks. Install and fit the flashings so as to be completely weathertight. Provide factory-fabricated base flashing for interior and exterior corners.

3.1.10 Counterflashing

Except where indicated or specified otherwise, insert counterflashing in reglets located from 9 to 10 inch above roof decks, extend down vertical surfaces over upturned vertical leg of base flashings not less than 3 inch. Fold the exposed edges of counterflashings 1/2 inch. Provide end laps in counterflashings not less than 3 inch and make it weathertight with plastic cement. Do not make lengths of metal counterflashings exceed 10 feet. Form the flashings to the required shapes before installation. Factory-form the corners not less than 12 inch from the angle. Turn up the concealed edge of counterflashings built into masonry or concrete walls not less than 1/4 inch and extend not less than 2 inch into the walls. Install counterflashing to provide a spring action against base flashing.

3.1.11 Metal Drip Edge

Provide a metal drip edge, designed to allow water run-off to drip free of underlying construction, at eaves and rakes prior to the application of roofing shingles. Apply directly on the wood deck at the eaves and over the underlay along the rakes.

3.1.12 Eave Flashing

One piece in width, applied in 8 to 10 foot lengths with expansion joints spaced as specified in paragraph entitled "Expansion and Contraction." Provide a 3/4 inch continuous fold in the upper edge of the sheet to engage cleats spaced not more than 10 inch on center. Locate the upper edge of flashing not less than 18 inch from the outside face of the building, measured along the roof slope. Fold lower edge of the flashing over and loose-lock into a continuous edge strip on the fascia.

3.1.13 Expansion Joints

Provide expansion joints in continuous sheet metal at 40 foot intervals for stainless steel. Provide evenly spaced joints. Provide an additional joint where the distance between the last expansion joint and the end of the continuous run is more than half the required interval spacing.

3.1.14 Flashing at Roof Penetrations and Equipment Supports

Provide metal flashing for all pipes, ducts, and conduits projecting through the roof surface and for equipment supports, guy wire anchors, and similar items supported by or attached to the roof deck.

3.1.15 Single Pipe Vents

Set premolded pipe sleeves with adhesive in accordance with manufacturer's instructions.

3.2 PAINTING

Field-paint sheet metal for separation of dissimilar materials.

3.3 CLEANING

Clean exposed sheet metal work at completion of installation. Remove grease and oil films, handling marks, contamination from steel wool, fittings and drilling debris, and scrub-clean. Free the exposed metal surfaces of dents, creases, waves, scratch marks, and solder or weld marks.

3.4 REPAIRS TO FINISH

Scratches, abrasions, and minor surface defects of finish may be repaired in accordance with the manufacturer's printed instructions and as approved. Repair damaged surfaces caused by scratches, blemishes, and variations of color and surface texture. Replace items which cannot be repaired.

3.5 FIELD QUALITY CONTROL

Establish and maintain a Quality Control Plan for sheet metal used in conjunction with roofing to assure compliance of the installed sheet metalwork with the contract requirements. Remove work that is not in compliance with the contract and replace or correct. Include quality control, but not be limited to, the following:

- a. Observation of environmental conditions; number and skill level of sheet metal workers; condition of substrate.
- b. Verification that specified material is provided and installed.
- c. Inspection of sheet metalwork, for proper size(s) and thickness(es), fastening and joining, and proper installation.

3.5.1 Procedure

Include a checklist of points to be observed. Document the actual quality control observations and inspections.

TABLE II. SHEET METAL JOINTS			
TYPE OF JOINT			
Item Designation	Stainless Steel	Aluminum	Remarks
Joint cap for building expansion seam, cleated joint at roof	1.25 inch single lock, standing seam, cleated	1.25 inch single lock, standing	--
Flashings			
Base	One inch 3 inch lap for expansion joint	One inch flat locked, soldered; sealed; 3 inch lap for expansion joint	Aluminum producer's recommended hard setting sealant for locked aluminum joints. Fill each metal expansion joint with a joint sealing compound.
Cap-in reglet	3 inch lap	3 inch lap	Seal groove with joint sealing compound.
Reglets	Butt joint	--	Seal reglet groove with joint sealing compound.
Eave	One inch flat locked, cleated. One inch loose locked, sealed expansion joint, cleated.	One inch flat locked, locked, cleated one inch loose locked, sealed expansion joints, cleated	Same as base flashing.
Stepped	3 inch lap	3 inch lap	--
Valley	6 inch lap cleated	6 inch lap cleated	--
Edge strip	Butt	Butt	--
(a) Provide a 3 inch lap elastomeric flashing with manufacturer's recommended sealant.			

TABLE II. SHEET METAL JOINTS			
TYPE OF JOINT			
Item Designation	Stainless Steel	Aluminum	Remarks
(b) Seal Polyvinyl chloride reglet with manufacturer's recommended sealant.			

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 07 - THERMAL AND MOISTURE PROTECTION

SECTION 07 72 33

ROOF HATCHES

05/15

PART 1 GENERAL

- 1.1 REFERENCES
- 1.2 SUBMITTALS
- 1.3 QUALITY ASSURANCE
- 1.4 DELIVERY, STORAGE, AND HANDLING

PART 2 PRODUCTS

- 2.1 MATERIALS
 - 2.1.1 Galvanized Steel Sheets
 - 2.1.2 Steel Angle
 - 2.1.3 Steel Pipe
 - 2.1.4 Fittings
- 2.2 ROOF HATCHES
 - 2.2.1 Cover
 - 2.2.2 Curb
 - 2.2.3 Hardware
- 2.3 SAFETY RAILINGS
- 2.4 FABRICATION
- 2.5 FINISH
 - 2.5.1 Finish

PART 3 EXECUTION

- 3.1 PREPARATION
- 3.2 INSTALLATION
- 3.3 ADJUSTMENT
- 3.4 CLEANING

-- End of Section Table of Contents --

SECTION 07 72 33

ROOF HATCHES
05/15

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM A36/A36M (2008) Standard Specification for Carbon Structural Steel

ASTM A653/A653M (2013) Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

NATIONAL ASSOCIATION OF ARCHITECTURAL METAL MANUFACTURERS (NAAMM)

NAAMM AMP 500 (2006) Metal Finishes Manual

SHEET METAL AND AIR CONDITIONING CONTRACTORS' NATIONAL ASSOCIATION (SMACNA)

SMACNA 1793 (2012) Architectural Sheet Metal Manual, 7th Edition

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

29 CFR 1910.23 Guarding Floor and Wall Openings and Holes

29 CFR 1910.27 Fixed Ladders

1.2 SUBMITTALS

Submit the following in accordance with contract requirements:

SD-02 Shop Drawings

Roof Hatches

SAFETY RAILINGS

SD-03 Product Data

Roof Hatch

SAFETY RAILINGS

SD-08 Manufacturer's Instructions

Installation Instructions

1.3 QUALITY ASSURANCE

Manufacturer shall specialize in design and manufacture of the type of roof hatches specified in this section, and shall have a minimum of five years of documented successful experience.

1.4 DELIVERY, STORAGE, AND HANDLING

Roof hatches shall be cartoned or crated prior to shipment. Protect ventilators from moisture and damage. Remove damaged items from the site.

PART 2 PRODUCTS

2.1 MATERIALS

2.1.1 Galvanized Steel Sheets

Steel sheets shall be commercial quality, zinc-coated steel (hot-dip galvanized) of quality established by ASTM A653/A653M, minimum G90 coating thickness.

2.1.2 Steel Angle

ASTM A36/A36M steel frame, structural

2.1.3 Steel Pipe

Galvanized Steel Pipe, 1-1/4" ID, A53 Grade B pipe.

2.1.4 Fittings

Manufacturer's standard aluminum magnesium alloy, cast with set screw pipe mount

2.2 ROOF HATCHES

Provide weather tight roof hatches fabricated of galvanized steel, and assembled to sizes indicated. Provide roof hatches with spring hinge and hold open arm.

2.2.1 Cover

Minimum 14 gauge (0.075 inch) galvanized steel cover and 22 gauge (0.0299 inch) galvanized steel liner stiffened to support 40psf live load with 2 inch Polyisocyanurate R12

2.2.2 Curb

Minimum 14 gauge (0.075 inch) galvanized steel single wall curb with 14 gauge (0.075 inch) counterflash with 2 inch Polyisocyanurate R12.

2.2.3 Hardware

- a. Latch: Zinc plated steel with exterior and interior turn handles and padlock hasps. Minimum uplift force resistance, 20 pounds per square foot. Provide two latches for lengths greater than 60 inches.

b. Spring/Hinge Assembly: Zinc plated steel tamper-proof hinges with spring assembly.

c. Hold Open Arm: Automatic hold open arm with grip handle release to hold and lock covers open.

2.3 SAFETY RAILINGS

Provide hatch safety railing system with side rails and front self closing gate and as required by OSHA Standard 29 CFR 1910.23 and 29 CFR 1910.27.

2.4 FABRICATION

Fabricate roof hatches in accordance with approved shop drawings. Welds, soldered seams, and fasteners shall be clean, secure, watertight, and smooth. Edges shall be wired or beaded, where necessary, to ensure rigidity. Galvanic action between different metals in direct contact shall be prevented by nonconductive separators.

2.5 FINISH

2.5.1 Finish

Powdercoat finish in compliance with NAAMM AMP 500. Color: white.

PART 3 EXECUTION

3.1 PREPARATION

Prepare rough openings and other roof conditions in accordance with approved shop drawings and manufacturer's recommendations. Rough openings shall be field-measured and recorded on shop drawings prior to fabrication of roof hatches. Before starting the work, protect surrounding roof surfaces from damage. Coordinate fabrication with construction schedule.

3.2 INSTALLATION

Coordinate roof hatch and safety railing installation with roofing work, and in accordance with approved shop drawings, manufacturer's published instructions, and SMACNA 1793. Coordinate installation of sealant and roofing cement with Work of this Section to ensure water tightness.

3.3 ADJUSTMENT

Clean and lubricate joints and hardware. Adjust movable parts for smooth operation.

3.4 CLEANING

A. Clean exposed surfaces per manufacturer's written instructions. Touch up damaged metal coatings.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 07 - THERMAL AND MOISTURE PROTECTION

SECTION 07 92 00

JOINT SEALANTS

01/07

PART 1 GENERAL

- 1.1 REFERENCES
- 1.2 SUBMITTALS
- 1.3 ENVIRONMENTAL CONDITIONS
- 1.4 DELIVERY AND STORAGE
- 1.5 QUALITY ASSURANCE
 - 1.5.1 Compatibility with Substrate
 - 1.5.2 Joint Tolerance
- 1.6 SPECIAL WARRANTY

PART 2 PRODUCTS

- 2.1 SEALANTS
 - 2.1.1 Exterior Sealant
- 2.2 PRIMERS
- 2.3 BOND BREAKERS
- 2.4 BACKSTOPS
- 2.5 CLEANING SOLVENTS

PART 3 EXECUTION

- 3.1 SURFACE PREPARATION
 - 3.1.1 Steel Surfaces
 - 3.1.2 Aluminum or Bronze Surfaces
 - 3.1.3 Concrete and Masonry Surfaces
 - 3.1.4 Wood Surfaces
- 3.2 SEALANT PREPARATION
- 3.3 APPLICATION
 - 3.3.1 Joint Width-To-Depth Ratios
 - 3.3.2 Masking Tape
 - 3.3.3 Backstops
 - 3.3.4 Primer
 - 3.3.5 Bond Breaker
 - 3.3.6 Sealants
- 3.4 PROTECTION AND CLEANING
 - 3.4.1 Protection
 - 3.4.2 Final Cleaning

-- End of Section Table of Contents --

SECTION 07 92 00

JOINT SEALANTS
01/07

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM C920 (2014a) Standard Specification for
Elastomeric Joint Sealants

1.2 SUBMITTALS

Submit the following in accordance with contract documents:

SD-03 Product Data

Sealants

Primers

Bond breakers

Backstops

Manufacturer's descriptive data including storage requirements, shelf life, curing time, instructions for mixing and application, and primer data (if required). Provide a copy of the Material Safety Data Sheet for each solvent, primer or sealant material.

1.3 ENVIRONMENTAL CONDITIONS

Apply sealant when the ambient temperature is between 40 and 90 degrees F.

1.4 DELIVERY AND STORAGE

Deliver materials to the job site in unopened manufacturers' external shipping containers, with brand names, date of manufacture, color, and material designation clearly marked thereon. Label elastomeric sealant containers to identify type, class, grade, and use. Carefully handle and store materials to prevent inclusion of foreign materials or subjection to sustained temperatures exceeding 90 degrees F or less than 0 degrees F.

1.5 QUALITY ASSURANCE

1.5.1 Compatibility with Substrate

Verify that each of the sealants are compatible for use with joint substrates.

1.5.2 Joint Tolerance

Provide joint tolerances in accordance with manufacturer's printed instructions.

1.6 SPECIAL WARRANTY

Guarantee sealant joint against failure of sealant and against water penetration through each sealed joint for five years.

PART 2 PRODUCTS

2.1 SEALANTS

Provide sealant that has been tested and found suitable for the substrates to which it will be applied.

2.1.1 Exterior Sealant

For joints in vertical surfaces, provide ASTM C920, Type S or M, Grade NS, Class 25, Use NT. For joints in horizontal surfaces, provide ASTM C920, Type S or M, Grade P, Class 25, Use T. Provide location(s) and color(s) of sealant as follows:

LOCATION	COLOR
a. Joints and recesses formed where frames and subsills of windows, doors, louvers, and vents adjoin masonry, concrete, or metal frames. Use sealant at both exterior and interior surfaces of exterior wall penetrations.	Match adjacent surface color
b. Voids where items pass through exterior walls.	Match adjacent surface color
c. Metal reglets, where flashing is inserted into masonry joints, and where flashing is penetrated by coping dowels.	Match adjacent surface color
d. Metal-to-metal joints where sealant is indicated or specified.	Match adjacent surface color
e. Joints between ends fascias, copings, and adjacent walls.	Match adjacent surface color

2.2 PRIMERS

Provide a nonstaining, quick-drying type and consistency recommended by the sealant manufacturer for the particular application.

2.3 BOND BREAKERS

Provide the type and consistency recommended by the sealant manufacturer to prevent adhesion of the sealant to backing or to bottom of the joint.

2.4 BACKSTOPS

Provide glass fiber roving or neoprene, butyl, polyurethane, or polyethylene foams free from oil or other staining elements as recommended by sealant manufacturer. Provide 25 to 33 percent oversized backing for closed cell and 40 to 50 percent oversized backing for open cell material, unless otherwise indicated. Make backstop material compatible with sealant. Do not use oakum and other types of absorptive materials as backstops.

2.5 CLEANING SOLVENTS

Provide type(s) recommended by the sealant manufacturer except for aluminum and bronze surfaces that will be in contact with sealant.

PART 3 EXECUTION

3.1 SURFACE PREPARATION

Clean surfaces from dirt frost, moisture, grease, oil, wax, lacquer, paint, or other foreign matter that would tend to destroy or impair adhesion. Remove oil and grease with solvent. Surfaces must be wiped dry with clean cloths. When resealing an existing joint, remove existing caulk or sealant prior to applying new sealant. For surface types not listed below, contact sealant manufacturer for specific recommendations.

3.1.1 Steel Surfaces

Remove loose mill scale by sandblasting or, if sandblasting is impractical or would damage finish work, scraping and wire brushing. Remove protective coatings by sandblasting or using a residue-free solvent.

3.1.2 Aluminum or Bronze Surfaces

Remove temporary protective coatings from surfaces that will be in contact with sealant. When masking tape is used as a protective coating, remove tape and any residual adhesive just prior to sealant application. For removing protective coatings and final cleaning, use nonstaining solvents recommended by the manufacturer of the item(s) containing aluminum or bronze surfaces.

3.1.3 Concrete and Masonry Surfaces

Where surfaces have been treated with curing compounds, oil, or other such materials, remove materials by sandblasting or wire brushing. Remove laitance, efflorescence and loose mortar from the joint cavity.

3.1.4 Wood Surfaces

Keep wood surfaces to be in contact with sealants free of splinters and sawdust or other loose particles.

3.2 SEALANT PREPARATION

Do not add liquids, solvents, or powders to the sealant. Mix multicomponent elastomeric sealants in accordance with manufacturer's instructions.

3.3 APPLICATION

3.3.1 Joint Width-To-Depth Ratios

a. Acceptable Ratios:

<u>JOINT WIDTH</u>	<u>JOINT DEPTH</u>	
	Minimum	Maximum
For metal, glass, or other nonporous surfaces:		
1/4 inch (minimum)	1/4 inch	1/4 inch
over 1/4 inch	1/2 of width	Equal to width
For wood, concrete, masonry, stone:		
1/4 inch (minimum)	1/4 inch	1/4 inch
over 1/4 inch to 1/2 inch	1/4 inch	Equal to width
over 1/2 inch to 2 inch	1/2 inch	5/8 inch
Over 2 inch	As recommended by sealant manufacturer	

- b. Unacceptable Ratios: Where joints of acceptable width-to-depth ratios have not been provided, clean out joints to acceptable depths and grind or cut to acceptable widths without damage to the adjoining work. Grinding is not required on metal surfaces.

3.3.2 Masking Tape

Place masking tape on the finish surface on one or both sides of a joint cavity to protect adjacent finish surfaces from primer or sealant smears. Remove masking tape within 10 minutes after joint has been filled and tooled.

3.3.3 Backstops

Install backstops dry and free of tears or holes. Tightly pack the back or bottom of joint cavities with backstop material to provide a joint of the depth specified. Install backstops in the following locations:

- a. Where indicated.
- b. Where backstop is not indicated but joint cavities exceed the acceptable maximum depths specified in paragraph entitled, "Joint Width-to-Depth Ratios".

3.3.4 Primer

Immediately prior to application of the sealant, clean out loose particles from joints. Where recommended by sealant manufacturer, apply primer to joints in concrete masonry units, wood, and other porous surfaces in accordance with sealant manufacturer's instructions. Do not apply primer to exposed finish surfaces.

3.3.5 Bond Breaker

Provide bond breakers to the back or bottom of joint cavities, as recommended by the sealant manufacturer for each type of joint and sealant used, to prevent sealant from adhering to these surfaces. Carefully apply the bond breaker to avoid contamination of adjoining surfaces or breaking bond with surfaces other than those covered by the bond breaker.

3.3.6 Sealants

Provide a sealant compatible with the material(s) to which it is applied. Do not use a sealant that has exceeded shelf life or has jelled and can not be discharged in a continuous flow from the gun. Apply the sealant in accordance with the manufacturer's printed instructions with a gun having a nozzle that fits the joint width. Force sealant into joints to fill the joints solidly without air pockets. Tool sealant after application to ensure adhesion. Make sealant uniformly smooth and free of wrinkles. Upon completion of sealant application, roughen partially filled or unfilled joints, apply sealant, and tool smooth as specified. Apply sealer over the sealant when and as specified by the sealant manufacturer.

3.4 PROTECTION AND CLEANING

3.4.1 Protection

Protect areas adjacent to joints from sealant smears. Masking tape may be used for this purpose if removed 5 to 10 minutes after the joint is filled.

3.4.2 Final Cleaning

Upon completion of sealant application, remove remaining smears and stains and leave the work in a clean and neat condition.

- a. Masonry and Other Porous Surfaces: Immediately scrape off fresh sealant that has been smeared on masonry and rub clean with a solvent as recommended by the sealant manufacturer. Allow excess sealant to cure for 24 hour then remove by wire brushing or sanding.
- b. Metal and Other Non-Porous Surfaces: Remove excess sealant with a solvent-moistened cloth.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 09 - FINISHES

SECTION 09 90 00

PAINTS AND COATINGS

05/11

PART 1 GENERAL

- 1.1 REFERENCES
- 1.2 SUBMITTALS
- 1.3 APPLICATOR'S QUALIFICATIONS
 - 1.3.1 Contractor Qualification
- 1.4 REGULATORY REQUIREMENTS
 - 1.4.1 Environmental Protection
 - 1.4.2 Lead Content
 - 1.4.3 Chromate Content
 - 1.4.4 Asbestos Content
 - 1.4.5 Mercury Content
 - 1.4.6 Silica
 - 1.4.7 Human Carcinogens
- 1.5 PACKAGING, LABELING, AND STORAGE
- 1.6 SAFETY AND HEALTH
 - 1.6.1 Safety Methods Used During Coating Application
 - 1.6.2 Toxic Materials
- 1.7 ENVIRONMENTAL CONDITIONS
 - 1.7.1 Coatings
- 1.8 COLOR SELECTION
- 1.9 LOCATION AND SURFACE TYPE TO BE PAINTED
 - 1.9.1 Painting Included
 - 1.9.1.1 Exterior Painting
 - 1.9.2 Painting Excluded
 - 1.9.3 Mechanical and Electrical Painting
 - 1.9.4 Definitions and Abbreviations
 - 1.9.4.1 Qualification Testing
 - 1.9.4.2 Batch Quality Conformance Testing
 - 1.9.4.3 Coating
 - 1.9.4.4 DFT or dft
 - 1.9.4.5 DSD
 - 1.9.4.6 EPP
 - 1.9.4.7 EXT
 - 1.9.4.8 INT
 - 1.9.4.9 micron / microns
 - 1.9.4.10 mil / mils
 - 1.9.4.11 mm
 - 1.9.4.12 MPI Gloss Levels
 - 1.9.4.13 MPI System Number
 - 1.9.4.14 Paint
 - 1.9.4.15 REX
 - 1.9.4.16 RIN

PART 2 PRODUCTS

2.1 MATERIALS

PART 3 EXECUTION

- 3.1 PROTECTION OF AREAS AND SPACES NOT TO BE PAINTED
- 3.2 SURFACE PREPARATION
 - 3.2.1 Additional Requirements for Preparation of Surfaces With Existing Coatings
 - 3.2.2 Existing Coated Surfaces with Minor Defects
 - 3.2.3 Removal of Existing Coatings
 - 3.2.4 Substrate Repair
- 3.3 PREPARATION OF METAL SURFACES
 - 3.3.1 Existing and New Ferrous Surfaces
 - 3.3.2 Final Ferrous Surface Condition:
 - 3.3.3 Galvanized Surfaces
 - 3.3.4 Non-Ferrous Metallic Surfaces
- 3.4 PREPARATION OF CONCRETE AND CEMENTITIOUS SURFACE
 - 3.4.1 Concrete and Masonry
 - 3.4.2 Gypsum Board, Plaster
- 3.5 APPLICATION
 - 3.5.1 Coating Application
 - 3.5.2 Mixing and Thinning of Paints
 - 3.5.3 Two-Component Systems
 - 3.5.4 Coating Systems
- 3.6 COATING SYSTEMS FOR METAL
- 3.7 COATING SYSTEMS FOR CONCRETE AND CEMENTITIOUS SUBSTRATES
- 3.8 INSPECTION AND ACCEPTANCE
- 3.9 WASTE MANAGEMENT
- 3.10 PAINT TABLES
 - 3.10.1 EXTERIOR PAINT TABLES

-- End of Section Table of Contents --

SECTION 09 90 00

PAINTS AND COATINGS
05/11

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN CONFERENCE OF GOVERNMENTAL INDUSTRIAL HYGIENISTS (ACGIH)

ACGIH 0100 (2001; Supplements 2002-2008)
Documentation of the Threshold Limit
Values and Biological Exposure Indices

ASTM INTERNATIONAL (ASTM)

ASTM D235 (2002; R 2012) Mineral Spirits (Petroleum
Spirits) (Hydrocarbon Dry Cleaning Solvent)

ASTM D4214 (2007) Standard Test Method for Evaluating
the Degree of Chalking of Exterior Paint
Films

ASTM D4263 (1983; R 2012) Indicating Moisture in
Concrete by the Plastic Sheet Method

ASTM D4444 (2013) Use and Calibration of Hand-Held
Moisture Meters

ASTM D523 (2014) Standard Test Method for Specular
Gloss

ASTM D6386 (2010) Standard Practice for Preparation
of Zinc (Hot-Dip Galvanized) Coated Iron
and Steel Product and Hardware Surfaces
for Painting

ASTM F1869 (2011) Measuring Moisture Vapor Emission
Rate of Concrete Subfloor Using Anhydrous
Calcium Chloride

MASTER PAINTERS INSTITUTE (MPI)

MPI 10 (Oct 2009) Exterior Latex, Flat, MPI Gloss
Level 1

MPI 101 (Oct 2009) Epoxy Anti-Corrosive Metal
Primer

MPI 107 (Oct 2009) Rust Inhibitive Primer
(Water-Based)

MPI 11	(Oct 2009) Exterior Latex, Semi-Gloss, MPI Gloss Level 5
MPI 113	(Oct 2009) Exterior Pigmented Elastomeric Coating (Water Based)
MPI 119	(Oct 2009) Exterior Latex, Gloss
MPI 134	(Oct 2009) Galvanized Primer (Waterbased)
MPI 161	(Oct 2009) Exterior W.B. Light Industrial Coating, MPI Gloss Level 3
MPI 163	(Oct 2009) Exterior W.B. Light Industrial Coating, Semi-Gloss, MPI Gloss Level 5
MPI 23	(Oct 2009) Surface Tolerant Metal Primer
MPI 26	(Oct 2009) Cementitious Galvanized Metal Primer
MPI 4	(Oct 2009) Interior/Exterior Latex Block Filler
MPI 8	(Oct 2009) Exterior Alkyd, Flat, MPI Gloss Level I
MPI 94	(Oct 2009) Exterior Alkyd, Semi-Gloss, MPI Gloss Level 5
MPI 95	(Oct 2009) Quick Drying Primer for Aluminum

SOCIETY FOR PROTECTIVE COATINGS (SSPC)

SSPC 7/NACE No.4	(2007; E 2004) Brush-Off Blast Cleaning
SSPC PA 1	(2000; E 2004) Shop, Field, and Maintenance Painting of Steel
SSPC PA Guide 3	(1982; E 1995) A Guide to Safety in Paint Application
SSPC SP 1	(1982; E 2004) Solvent Cleaning
SSPC SP 10/NACE No. 2	(2007) Near-White Blast Cleaning
SSPC SP 12/NACE No.5	(2002) Surface Preparation and Cleaning of Metals by Waterjetting Prior to Recoating
SSPC SP 2	(1982; E 2000; E 2004) Hand Tool Cleaning
SSPC SP 3	(1982; E 2004) Power Tool Cleaning
SSPC SP 6/NACE No.3	(2007) Commercial Blast Cleaning
SSPC VIS 1	(2002; E 2004) Guide and Reference Photographs for Steel Surfaces Prepared by Dry Abrasive Blast Cleaning

SSPC VIS 3 (2004) Guide and Reference Photographs for Steel Surfaces Prepared by Hand and Power Tool Cleaning

SSPC VIS 4/NACE VIS 7 (1998; E 2000; E 2004) Guide and Reference Photographs for Steel Surfaces Prepared by Waterjetting

U.S. GENERAL SERVICES ADMINISTRATION (GSA)

FED-STD-313 (2014; Rev E) Material Safety Data, Transportation Data and Disposal Data for Hazardous Materials Furnished to Government Activities

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

29 CFR 1910.1000 Air Contaminants

1.2 SUBMITTALS

Submit the following in accordance with contract requirements:

The current MPI, "Approved Product List" which lists paint by brand, label, product name and product code as of the date of contract award, will be used to determine compliance with the submittal requirements of this specification. The Contractor may choose to use a subsequent MPI "Approved Product List", however, only one list may be used for the entire contract and each coating system is to be from a single manufacturer. All coats on a particular substrate must be from a single manufacturer. No variation from the MPI Approved Products List is acceptable.

Samples of specified materials may be taken and tested for compliance with specification requirements.

SD-03 Product Data

Coating

Manufacturer's Technical Data Sheets

Indicate VOC content.

SD-04 Samples

Color

Submit manufacturer's samples of paint colors. Cross reference color samples to color scheme as indicated.

SD-07 Certificates

Applicator's qualifications

SD-08 Manufacturer's Instructions

Application instructions

Mixing

Detailed mixing instructions, minimum and maximum application temperature and humidity, potlife, and curing and drying times between coats.

Manufacturer's Material Safety Data Sheets

Submit manufacturer's Material Safety Data Sheets for coatings, solvents, and other potentially hazardous materials, as defined in FED-STD-313.

SD-10 Operation and Maintenance Data

Coatings

Preprinted cleaning and maintenance instructions for all coating systems shall be provided.

1.3 APPLICATOR'S QUALIFICATIONS

1.3.1 Contractor Qualification

Submit the name, address, telephone number, FAX number, and e-mail address of the contractor that will be performing all surface preparation and coating application. Submit evidence that key personnel have successfully performed surface preparation and application of coatings on minimum of three similar projects within the past three years. List information by individual and include the following:

- a. Name of individual and proposed position for this work.
- b. Information about each previous assignment including:

Position or responsibility

Employer (if other than the Contractor)

Name of facility owner

Mailing address, telephone number, and telex number (if non-US) of facility owner

Name of individual in facility owner's organization who can be contacted as a reference

Location, size and description of structure

Dates work was carried out

Description of work carried out on structure

1.4 REGULATORY REQUIREMENTS

1.4.1 Environmental Protection

In addition to requirements specified elsewhere for environmental protection, provide coating materials that conform to the restrictions of

the local Air Pollution Control District and regional jurisdiction. Notify Contracting Officer of any paint specified herein which fails to conform.

1.4.2 Lead Content

Do not use coatings having a lead content over 0.06 percent by weight of nonvolatile content.

1.4.3 Chromate Content

Do not use coatings containing zinc-chromate or strontium-chromate.

1.4.4 Asbestos Content

Materials shall not contain asbestos.

1.4.5 Mercury Content

Materials shall not contain mercury or mercury compounds.

1.4.6 Silica

Abrasive blast media shall not contain free crystalline silica.

1.4.7 Human Carcinogens

Materials shall not contain ACGIH 0100 confirmed human carcinogens (A1) or suspected human carcinogens (A2).

1.5 PACKAGING, LABELING, AND STORAGE

Paints shall be in sealed containers that legibly show the contract specification number, designation name, formula or specification number, batch number, color, quantity, date of manufacture, manufacturer's formulation number, manufacturer's directions including any warnings and special precautions, and name and address of manufacturer. Pigmented paints shall be furnished in containers not larger than 5 gallons. Paints and thinners shall be stored in accordance with the manufacturer's written directions, and as a minimum, stored off the ground, under cover, with sufficient ventilation to prevent the buildup of flammable vapors, and at temperatures between 40 to 95 degrees F. Do not store paint, polyurethane, varnish, or wood stain products with materials that have a high capacity to adsorb VOC emissions. Do not store paint, polyurethane, varnish, or wood stain products in occupied spaces.

1.6 SAFETY AND HEALTH

Apply coating materials using safety methods and equipment in accordance with the following:

Work shall comply with applicable Federal, State, and local laws and regulations. The Activity Hazard Analysis shall include analyses of the potential impact of painting operations on painting personnel and on others involved in and adjacent to the work zone.

1.6.1 Safety Methods Used During Coating Application

Comply with the requirements of SSPC PA Guide 3.

1.6.2 Toxic Materials

To protect personnel from overexposure to toxic materials, conform to the most stringent guidance of:

- a. The applicable manufacturer's Material Safety Data Sheets (MSDS) or local regulation.
- b. 29 CFR 1910.1000.
- c. ACGIH 0100, threshold limit values.

1.7 ENVIRONMENTAL CONDITIONS

Comply, at minimum, with manufacturer recommendations for space ventilation during and after installation.

1.7.1 Coatings

Do not apply coating when air or substrate conditions are:

- a. Less than 5 degrees F above dew point;
- b. Below 50 degrees F or over 95 degrees F, unless specifically pre-approved by the Contracting Officer and the product manufacturer. Under no circumstances shall application conditions exceed manufacturer recommendations.

1.8 COLOR SELECTION

Colors of finish coats shall be as indicated or specified. Where not indicated or specified, colors shall be selected by the Contracting Officer. Manufacturers' names and color identification are used for the purpose of color identification only. Named products are acceptable for use only if they conform to specified requirements. Products of other manufacturers are acceptable if the colors approximate colors indicated and the product conforms to specified requirements.

Tint each coat progressively darker to enable confirmation of the number of coats.

Color, texture, and pattern of wall coating systems shall be as indicated .

1.9 LOCATION AND SURFACE TYPE TO BE PAINTED

1.9.1 Painting Included

Where a space or surface is indicated to be painted, include the following unless indicated otherwise.

- a. Surfaces behind portable objects and surface mounted articles readily detachable by removal of fasteners, such as screws and bolts.
- b. New factory finished surfaces that require identification or color coding and factory finished surfaces that are damaged during performance of the work.
- c. Existing coated surfaces that are damaged during performance of the

work.

1.9.1.1 Exterior Painting

Includes new surfaces and existing coated surfaces of the buildings and appurtenances as indicated.

1.9.2 Painting Excluded

Do not paint the following unless indicated otherwise.

- a. Surfaces concealed and made inaccessible by panelboards, fixed ductwork, machinery, and equipment fixed in place.
- b. Surfaces in concealed spaces. Concealed spaces are defined as enclosed spaces above suspended ceilings, furred spaces, attic spaces, crawl spaces, elevator shafts and chases.
- c. Steel to be embedded in concrete.
- d. Copper, stainless steel, aluminum, brass, and lead except existing coated surfaces.
- e. Hardware, fittings, and other factory finished items.

1.9.3 Mechanical and Electrical Painting

Includes field coating of exterior new and existing surfaces.

- a. Where a space or surface is indicated to be painted, include the following items unless indicated otherwise.
 - (1) Exposed piping, conduit, and ductwork;
 - (2) Supports, hangers, air grilles, and registers;
 - (3) Miscellaneous metalwork and insulation coverings.
- b. Do not paint the following, unless indicated otherwise:
 - (1) New zinc-coated, aluminum, and copper surfaces under insulation
 - (2) New aluminum jacket on piping

1.9.4 Definitions and Abbreviations

1.9.4.1 Qualification Testing

Qualification testing is the performance of all test requirements listed in the product specification. This testing is accomplished by MPI to qualify each product for the MPI Approved Product List, and may also be accomplished by Contractor's third party testing lab if an alternative to Batch Quality Conformance Testing by MPI is desired.

1.9.4.2 Batch Quality Conformance Testing

Batch quality conformance testing determines that the product provided is the same as the product qualified to the appropriate product specification. This testing shall only be accomplished by MPI testing lab.

1.9.4.3 Coating

A film or thin layer applied to a base material called a substrate. A coating may be a metal, alloy, paint, or solid/liquid suspensions on various substrates (metals, plastics, wood, paper, leather, cloth, etc.). They may be applied by electrolysis, vapor deposition, vacuum, or mechanical means such as brushing, spraying, calendaring, and roller coating. A coating may be applied for aesthetic or protective purposes or both. The term "coating" as used herein includes emulsions, enamels, stains, varnishes, sealers, epoxies, and other coatings, whether used as primer, intermediate, or finish coat. The terms paint and coating are used interchangeably.

1.9.4.4 DFT or dft

Dry film thickness, the film thickness of the fully cured, dry paint or coating.

1.9.4.5 DSD

Degree of Surface Degradation, the MPI system of defining degree of surface degradation. Five (5) levels are generically defined under the Assessment sections in the MPI Maintenance Repainting Manual.

1.9.4.6 EPP

Environmentally Preferred Products, a standard for determining environmental preferability in support of Executive Order 13101.

1.9.4.7 EXT

MPI short term designation for an exterior coating system.

1.9.4.8 INT

MPI short term designation for an interior coating system.

1.9.4.9 micron / microns

The metric measurement for 0.001 mm or one/one-thousandth of a millimeter.

1.9.4.10 mil / mils

The English measurement for 0.001 in or one/one-thousandth of an inch, equal to 25.4 microns or 0.0254 mm.

1.9.4.11 mm

The metric measurement for millimeter, 0.001 meter or one/one-thousandth of a meter.

1.9.4.12 MPI Gloss Levels

MPI system of defining gloss. Seven (7) gloss levels (G1 to G7) are generically defined under the Evaluation sections of the MPI Manuals. Traditionally, Flat refers to G1/G2, Eggshell refers to G3, Semigloss refers to G5, and Gloss refers to G6.

Gloss levels are defined by MPI as follows:

Gloss Level	Description	Units at 60 degrees	Units at 85 degrees
G1	Matte or Flat	0 to 5	10 max
G2	Velvet	0 to 10	10 to 35
G3	Eggshell	10 to 25	10 to 35
G4	Satin	20 to 35	35 min
G5	Semi-Gloss	35 to 70	
G6	Gloss	70 to 85	
G7	High Gloss		

Gloss is tested in accordance with ASTM D523. Historically, the Government has used Flat (G1 / G2), Eggshell (G3), Semi-Gloss (G5), and Gloss (G6).

1.9.4.13 MPI System Number

The MPI coating system number in each Division found in either the MPI Architectural Painting Specification Manual or the Maintenance Repainting Manual and defined as an exterior (EXT/REX) or interior system (INT/RIN). The Division number follows the CSI Master Format.

1.9.4.14 Paint

See Coating definition.

1.9.4.15 REX

MPI short term designation for an exterior coating system used in repainting projects or over existing coating systems.

1.9.4.16 RIN

MPI short term designation for an interior coating system used in repainting projects or over existing coating systems.

PART 2 PRODUCTS

2.1 MATERIALS

Conform to the coating specifications and standards referenced in PART 3. Submit manufacturer's technical data sheets for specified coatings and solvents. Comply with applicable regulations regarding toxic and hazardous materials.

PART 3 EXECUTION

3.1 PROTECTION OF AREAS AND SPACES NOT TO BE PAINTED

Prior to surface preparation and coating applications, remove, mask, or otherwise protect, hardware, hardware accessories, machined surfaces, radiator covers, plates, lighting fixtures, public and private property, and other such items not to be coated that are in contact with surfaces to be coated. Following completion of painting, workmen skilled in the trades involved shall reinstall removed items. Restore surfaces contaminated by coating materials, to original condition and repair damaged items.

3.2 SURFACE PREPARATION

Remove dirt, splinters, loose particles, grease, oil, disintegrated coatings, and other foreign matter and substances deleterious to coating performance as specified for each substrate before application of paint or surface treatments. Oil and grease shall be removed prior to mechanical cleaning. Cleaning shall be programmed so that dust and other contaminants will not fall on wet, newly painted surfaces. Exposed ferrous metals such as nail heads on or in contact with surfaces to be painted with water-thinned paints, shall be spot-primed with a suitable corrosion-inhibitive primer capable of preventing flash rusting and compatible with the coating specified for the adjacent areas.

3.2.1 Additional Requirements for Preparation of Surfaces With Existing Coatings

Before application of coatings, perform the following on surfaces covered by soundly-adhered coatings, defined as those which cannot be removed with a putty knife:

- a. Test existing finishes for lead before sanding, scraping, or removing. If lead is present, refer to paragraph Toxic Materials.
- b. Wipe previously painted surfaces to receive solvent-based coatings, except stucco and similarly rough surfaces clean with a clean, dry cloth saturated with mineral spirits, ASTM D235. Allow surface to dry. Wiping shall immediately precede the application of the first coat of any coating, unless specified otherwise.
- c. Sand existing glossy surfaces to be painted to reduce gloss. Brush, and wipe clean with a damp cloth to remove dust.
- d. The requirements specified are minimum. Comply also with the application instructions of the paint manufacturer.
- e. Previously painted surfaces specified to be repainted or damaged during construction shall be thoroughly cleaned of all grease, dirt, dust or other foreign matter.
- f. Blistering, cracking, flaking and peeling or other deteriorated coatings shall be removed.
- g. Chalk shall be removed so that when tested in accordance with ASTM D4214, the chalk resistance rating is no less than 8.
- h. Slick surfaces shall be roughened. Damaged areas such as, but not limited to, nail holes, cracks, chips, and spalls shall be repaired with suitable material to match adjacent undamaged areas.
- i. Edges of chipped paint shall be feather edged and sanded smooth.
- j. Rusty metal surfaces shall be cleaned as per SSPC requirements. Solvent, mechanical, or chemical cleaning methods shall be used to provide surfaces suitable for painting.
- k. New, proposed coatings shall be compatible with existing coatings.

3.2.2 Existing Coated Surfaces with Minor Defects

Sand, spackle, and treat minor defects to render them smooth. Minor defects are defined as scratches, nicks, cracks, gouges, spalls, alligating, chalking, and irregularities due to partial peeling of previous coatings. Remove chalking by sanding so that when tested in accordance with ASTM D4214, the chalk rating is not less than 8.

3.2.3 Removal of Existing Coatings

Remove existing coatings from the following surfaces:

- a. Surfaces containing large areas of minor defects;
- b. Surfaces containing more than 20 percent peeling area; and
- c. Surfaces designated by the Contracting Officer, such as surfaces where rust shows through existing coatings.

3.2.4 Substrate Repair

- a. Repair substrate surface damaged during coating removal;
- b. Sand edges of adjacent soundly-adhered existing coatings so they are tapered as smooth as practical to areas involved with coating removal; and
- c. Clean and prime the substrate as specified.

3.3 PREPARATION OF METAL SURFACES

3.3.1 Existing and New Ferrous Surfaces

- a. Ferrous Surfaces including Shop-coated Surfaces and Small Areas That Contain Rust, Mill Scale and Other Foreign Substances: Solvent clean or detergent wash in accordance with SSPC SP 1 to remove oil and grease. Where shop coat is missing or damaged, clean according to SSPC SP 2. Shop-coated ferrous surfaces shall be protected from corrosion by treating and touching up corroded areas immediately upon detection.

3.3.2 Final Ferrous Surface Condition:

For tool cleaned surfaces, the requirements are stated in SSPC SP 2 and SSPC SP 3. As a visual reference, cleaned surfaces shall be similar to photographs in SSPC VIS 3.

For abrasive blast cleaned surfaces, the requirements are stated in SSPC 7/NACE No.4, SSPC SP 6/NACE No.3, and SSPC SP 10/NACE No. 2. As a visual reference, cleaned surfaces shall be similar to photographs in SSPC VIS 1.

For waterjet cleaned surfaces, the requirements are stated in SSPC SP 12/NACE No.5. As a visual reference, cleaned surfaces shall be similar to photographs in SSPC VIS 4/NACE VIS 7.

3.3.3 Galvanized Surfaces

- a. New or Existing Galvanized Surfaces With Only Dirt and Zinc Oxidation Products: Clean with solvent, or non-alkaline detergent solution in

accordance with SSPC SP 1. If the galvanized metal has been passivated or stabilized, the coating shall be completely removed by brush-off abrasive blast. New galvanized steel to be coated shall not be "passivated" or "stabilized" If the absence of hexavalent stain inhibitors is not documented, test as described in ASTM D6386, Appendix X2, and remove by one of the methods described therein.

- b. Galvanized with Slight Coating Deterioration or with Little or No Rusting: Water jetting to SSPC SP 12/NACE No.5 WJ3 to remove loose coating from surfaces with less than 20 percent coating deterioration and no blistering, peeling, or cracking. Use inhibitor as recommended by the coating manufacturer to prevent rusting.

3.3.4 Non-Ferrous Metallic Surfaces

Aluminum and aluminum-alloy, lead, copper, and other nonferrous metal surfaces.

Surface Cleaning: Solvent clean in accordance with SSPC SP 1 and wash with mild non-alkaline detergent to remove dirt and water soluble contaminants.

3.4 PREPARATION OF CONCRETE AND CEMENTITIOUS SURFACE

3.4.1 Concrete and Masonry

- a. Curing: Concrete, stucco and masonry surfaces shall be allowed to cure at least 30 days before painting, except concrete slab on grade, which shall be allowed to cure 90 days before painting.
- b. Surface Cleaning: Remove the following deleterious substances.
 - (1) Dirt, Chalking, Grease, and Oil: Wash new and existing uncoated surfaces with a solution composed of 1/2 cup trisodium phosphate, 1/4 cup household detergent, and 4 quarts of warm water. Then rinse thoroughly with fresh water. Wash existing coated surfaces with a suitable detergent and rinse thoroughly. For large areas, water blasting may be used.
 - (2) Fungus and Mold: Wash new, existing coated, surfaces with a solution composed of 1/2 cup trisodium phosphate, 1/4 cup household detergent, 1 quart 5 percent sodium hypochlorite solution and 3 quarts of warm water. Rinse thoroughly with fresh water.
 - (3) Paint and Loose Particles: Remove by wire brushing.
 - (4) Efflorescence: Remove by scraping or wire brushing followed by washing with a 5 to 10 percent by weight aqueous solution of hydrochloric (muriatic) acid. Do not allow acid to remain on the surface for more than five minutes before rinsing with fresh water. Do not acid clean more than 4 square feet of surface, per workman, at one time.
- c. Cosmetic Repair of Minor Defects: Repair or fill mortar joints and minor defects, including but not limited to spalls, in accordance with manufacturer's recommendations and prior to coating application.
- d. Allowable Moisture Content: Latex coatings may be applied to damp surfaces, but not to surfaces with droplets of water. Do not apply

epoxies to damp vertical surfaces as determined by ASTM D4263 or horizontal surfaces that exceed 3 lbs of moisture per 1000 square feet in 24 hours as determined by ASTM F1869. In all cases follow manufacturers recommendations. Allow surfaces to cure a minimum of 30 days before painting.

3.4.2 Gypsum Board, Plaster

- a. Surface Cleaning: Plaster shall be clean and free from loose matter; gypsum board shall be dry. Remove loose dirt and dust by brushing with a soft brush, rubbing with a dry cloth, or vacuum-cleaning prior to application of the first coat material. A damp cloth or sponge may be used if paint will be water-based.
- b. Repair of Minor Defects: Prior to painting, repair joints, cracks, holes, surface irregularities, and other minor defects with patching plaster or spackling compound and sand smooth.
- c. Allowable Moisture Content: Latex coatings may be applied to damp surfaces, but not surfaces with droplets of water. Do not apply epoxies to damp surfaces as determined by ASTM D4263. New plaster to be coated shall have a maximum moisture content of 8 percent, when measured in accordance with ASTM D4444, Method A, unless otherwise authorized. In addition to moisture content requirements, allow new plaster to age a minimum of 30 days before preparation for painting.

3.5 APPLICATION

3.5.1 Coating Application

Painting practices shall comply with applicable federal, state and local laws enacted to insure compliance with Federal Clean Air Standards. Apply coating materials in accordance with SSPC PA 1. SSPC PA 1 methods are applicable to all substrates, except as modified herein.

At the time of application, paint shall show no signs of deterioration. Uniform suspension of pigments shall be maintained during application.

Unless otherwise specified or recommended by the paint manufacturer, paint may be applied by brush, roller, or spray. Use trigger operated spray nozzles for water hoses. Rollers for applying paints and enamels shall be of a type designed for the coating to be applied and the surface to be coated. Wear protective clothing and respirators when applying oil-based paints or using spray equipment with any paints.

Paints, except water-thinned types, shall be applied only to surfaces that are completely free of moisture as determined by sight or touch.

Thoroughly work coating materials into joints, crevices, and open spaces. Special attention shall be given to insure that all edges, corners, crevices, welds, and rivets receive a film thickness equal to that of adjacent painted surfaces.

Each coat of paint shall be applied so dry film shall be of uniform thickness and free from runs, drops, ridges, waves, pinholes or other voids, laps, brush marks, and variations in color, texture, and finish. Hiding shall be complete.

Touch up damaged coatings before applying subsequent coats.

- a. Drying Time: Allow time between coats, as recommended by the coating manufacturer, to permit thorough drying, but not to present topcoat adhesion problems. Provide each coat in specified condition to receive next coat.
- b. Primers, and Intermediate Coats: Do not allow primers or intermediate coats to dry more than 30 days, or longer than recommended by manufacturer, before applying subsequent coats. Follow manufacturer's recommendations for surface preparation if primers or intermediate coats are allowed to dry longer than recommended by manufacturers of subsequent coatings. Each coat shall cover surface of preceding coat or surface completely, and there shall be a visually perceptible difference in shades of successive coats.
- c. Finished Surfaces: Provide finished surfaces free from runs, drops, ridges, waves, laps, brush marks, and variations in colors.

3.5.2 Mixing and Thinning of Paints

Reduce paints to proper consistency by adding fresh paint, except when thinning is mandatory to suit surface, temperature, weather conditions, application methods, or for the type of paint being used. Obtain written permission from the Contracting Officer to use thinners. The written permission shall include quantities and types of thinners to use.

When thinning is allowed, paints shall be thinned immediately prior to application with not more than 1 pint of suitable thinner per gallon. The use of thinner shall not relieve the Contractor from obtaining complete hiding, full film thickness, or required gloss. Thinning shall not cause the paint to exceed limits on volatile organic compounds. Paints of different manufacturers shall not be mixed.

3.5.3 Two-Component Systems

Two-component systems shall be mixed in accordance with manufacturer's instructions. Any thinning of the first coat to ensure proper penetration and sealing shall be as recommended by the manufacturer for each type of substrate.

3.5.4 Coating Systems

- a. Systems by Substrates: Apply coatings that conform to the respective specifications listed in the following Tables:

Table

Division 3. Exterior Concrete Paint Table
Division 4. Exterior Concrete Masonry Units Paint Table
Division 5. Exterior Metal, Ferrous and Non-Ferrous Paint Table

- a. Minimum Dry Film Thickness (DFT): Apply paints, primers, varnishes, enamels, undercoats, and other coatings to a minimum dry film thickness of 1.5 mil each coat unless specified otherwise in the Tables. Coating thickness where specified, refers to the minimum dry film thickness.
- b. Coatings for Surfaces Not Specified Otherwise: Coat surfaces which have not been specified, the same as surfaces having similar conditions of exposure.

- c. Existing Surfaces Damaged During Performance of the Work, Including New Patches In Existing Surfaces: Coat surfaces with the following:
 - (1) One coat of primer.
 - (2) One coat of undercoat or intermediate coat.
 - (3) One topcoat to match adjacent surfaces.
- d. Existing Coated Surfaces To Be Painted: Apply coatings conforming to the respective specifications listed in the Tables herein, except that pretreatments, sealers and fillers need not be provided on surfaces where existing coatings are soundly adhered and in good condition. Do not omit undercoats or primers.

3.6 COATING SYSTEMS FOR METAL

Apply coatings of Tables in Division 5 for Exterior and Interior.

- a. Apply specified ferrous metal primer on the same day that surface is cleaned, to surfaces that meet all specified surface preparation requirements at time of application.
- b. Inaccessible Surfaces: Prior to erection, use one coat of specified primer on metal surfaces that will be inaccessible after erection.
- c. Shop-primed Surfaces: Touch up exposed substrates and damaged coatings to protect from rusting prior to applying field primer.
- d. Surface Previously Coated with Epoxy or Urethane: Apply MPI 101, 1.5 mils DFT immediately prior to application of epoxy or urethane coatings.
- e. Pipes and Tubing: The semitransparent film applied to some pipes and tubing at the mill is not to be considered a shop coat, but shall be overcoated with the specified ferrous-metal primer prior to application of finish coats.
- f. Exposed Nails, Screws, Fasteners, and Miscellaneous Ferrous Surfaces. On surfaces to be coated with water thinned coatings, spot prime exposed nails and other ferrous metal with latex primer MPI 107.

3.7 COATING SYSTEMS FOR CONCRETE AND CEMENTITIOUS SUBSTRATES

Apply coatings of Tables in Division 3, 4 and 9 for Exterior and Interior.

3.8 INSPECTION AND ACCEPTANCE

In addition to meeting previously specified requirements, demonstrate mobility of moving components, including swinging and sliding doors, cabinets, and windows with operable sash, for inspection by the Contracting Officer. Perform this demonstration after appropriate curing and drying times of coatings have elapsed and prior to invoicing for final payment.

3.9 WASTE MANAGEMENT

As specified in the Waste Management Plan and as follows. Do not use kerosene or any such organic solvents to clean up water based paints. Properly dispose of paints or solvents in designated containers. Close and

seal partially used containers of paint to maintain quality as necessary for reuse. Store in protected, well-ventilated, fire-safe area at moderate temperature. Place materials defined as hazardous or toxic waste in designated containers. Where local options exist for leftover paint recycling, collect all waste paint by type and provide for delivery to recycling or collection facility for reuse by local organizations.

3.10 PAINT TABLES

All DFT's are minimum values.

3.10.1 EXTERIOR PAINT TABLES

DIVISION 3: EXTERIOR CONCRETE PAINT TABLE

A. New and uncoated existing concrete;
vertical surfaces, including undersides of balconies and soffits but
excluding tops of slabs:

1. Latex

New; MPI EXT 3.1A-G2 (Flat) / Existing; MPI REX 3.1A-G2 (Flat)

Primer:	Intermediate:	Topcoat:
MPI 10	MPI 10	MPI 10
System DFT:	3.5 mils	

New; MPI EXT 3.1A-G5 (Semigloss) / Existing; MPI EXT 3.1A-G5 (Semigloss)

Primer:	Intermediate:	Topcoat:
MPI 11	MPI 11	MPI 11
System DFT:	3.5 mils	

New; MPI EXT 3.1A-G6 (Gloss) / Existing; MPI REX 3.1A-G6 (Gloss)

Primer:	Intermediate:	Topcoat:
MPI 119	MPI 119	MPI 119
System DFT:	3.5 mils	

Primer as recommended by manufacturer. Topcoat: Coating to match adjacent surfaces.

C. New and uncoated existing and Existing, previously painted concrete,
elastomeric System; vertical surfaces, including undersides of balconies
and soffits but excluding tops of slabs:

1. Elastomeric Coating

New; MPI EXT 3.1F / Existing; MPI REX 3.1F

Primer:	Intermediate:	Topcoat:
Per Manufacturer	MPI 113	MPI 113
System DFT:	16 mils	

Primer as recommended by manufacturer. Topcoat: Coating to match adjacent surfaces. Surface preparation and number of coats in accordance with manufacturer's instructions.

NOTE: Apply sufficient coats of MPI 113 to achieve a minimum dry film thickness of 16 mils.

DIVISION 4: EXTERIOR CONCRETE MASONRY UNITS PAINT TABLE

A. New and Existing concrete masonry on uncoated surface:

1. Latex

New; MPI EXT 4.2A-G1 (Flat) / Existing; MPI REX 4.2A-G1 (Flat)
Block Filler: Primer: Intermediate: Topcoat:
MPI 4 N/A MPI 10 MPI 10
System DFT: 11 mils

Topcoat: Coating to match adjacent surfaces.

B. New and Existing concrete masonry, elastomeric system; on uncoated surface:

1. Elastomeric Coating

New; MPI EXT 4.2D / Existing; MPI REX 4.2D
Primer: Intermediate: Topcoat:
Per Manufacturer MPI 113 MPI 113
System DFT: 16 mils

Primer as recommended by manufacturer. Topcoat: Coating to match adjacent surfaces. Surface preparation and number of coats in accordance with manufacturer's instructions.

NOTE: Apply sufficient coats of MPI 113 to achieve a minimum dry film thickness of 16 mils.

DIVISION 5: EXTERIOR METAL, FERROUS AND NON-FERROUS PAINT TABLE

STEEL / FERROUS SURFACES

A. New Steel that has been hand or power tool cleaned to SSPC SP 2 or SSPC SP 3

1. Alkyd

New; MPI EXT 5.1Q-G5 (Semigloss) Existing; MPI REX 5.1D-G5
Primer: Intermediate: Topcoat:
MPI 23 MPI 94 MPI 94
System DFT: 5.25 mils

EXTERIOR GALVANIZED SURFACES

B. New Galvanized surfaces:

1. Cementitious primer / Latex

MPI EXT 5.3A-G1 (Flat)
Primer: Intermediate: Topcoat:
MPI 26 MPI 10 MPI 10
System DFT: 4.5 mils

2. Waterborne Primer / Latex

MPI EXT 5.3H-G1 (Flat)
Primer: Intermediate: Topcoat:
MPI 134 MPI 10 MPI 10
System DFT: 4.5 mils

3. Waterborne Primer / Waterborne Light Industrial Coating

EXTERIOR GALVANIZED SURFACES

MPI EXT 5.3J-G5 (Semigloss)
Primer: Intermediate: Topcoat:
MPI 134 MPI 163 MPI 163
System DFT: 4.5 mils

4. Epoxy Primer / Waterborne Light Industrial Coating

MPI EXT 5.3K-G5 (Semigloss)
Primer: Intermediate: Topcoat:
MPI 101 MPI 163 MPI 163
System DFT: 5 mils

EXTERIOR SURFACES, OTHER METALS (NON-FERROUS)

I. Aluminum, aluminum alloy and other miscellaneous non-ferrous metal items not otherwise specified except hot metal surfaces, roof surfaces, and new prefinished equipment. Match surrounding finish:

1. Alkyd

MPI EXT 5.4F-G1 (Flat)
Primer: Intermediate: Topcoat:
MPI 95 MPI 8 MPI 8
System DFT: 5 mils

2. Waterborne Light Industrial Coating

MPI EXT 5.4G-G3 (Eggshell)
Primer: Intermediate: Topcoat:
MPI 95 MPI 161 MPI 161
System DFT: 5 mils

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 23 - HEATING, VENTILATING, AND AIR CONDITIONING

SECTION 23 00 00

AIR SUPPLY, DISTRIBUTION, VENTILATION, AND EXHAUST SYSTEMS

08/10

PART 1 GENERAL

- 1.1 REFERENCES
- 1.2 SYSTEM DESCRIPTION
 - 1.2.1 Mechanical Equipment Identification
 - 1.2.1.1 Charts
 - 1.2.2 Service Labeling
- 1.3 SUBMITTALS
- 1.4 QUALITY ASSURANCE
 - 1.4.1 Prevention of Corrosion
 - 1.4.2 Asbestos Prohibition
 - 1.4.3 Detail Drawings
- 1.5 DELIVERY, STORAGE, AND HANDLING

PART 2 PRODUCTS

- 2.1 STANDARD PRODUCTS
- 2.2 IDENTIFICATION PLATES
- 2.3 EQUIPMENT GUARDS AND ACCESS
- 2.4 ELECTRICAL WORK
- 2.5 ANCHOR BOLTS
- 2.6 SEISMIC ANCHORAGE
- 2.7 PAINTING
- 2.8 INDOOR AIR QUALITY
- 2.9 DUCT SYSTEMS
 - 2.9.1 Metal Ductwork
 - 2.9.1.1 General Service Duct Connectors
 - 2.9.2 Bird Screens and Frames
- 2.10 AIR SYSTEMS EQUIPMENT
 - 2.10.1 Fans
 - 2.10.1.1 Centrifugal Fans
- 2.11 FACTORY PAINTING

PART 3 EXECUTION

- 3.1 EXAMINATION
- 3.2 INSTALLATION
 - 3.2.1 Equipment and Installation
 - 3.2.2 Flexible Duct
 - 3.2.3 Metal Ductwork
 - 3.2.4 Duct Test Holes
- 3.3 CUTTING AND PATCHING
- 3.4 CLEANING
- 3.5 PENETRATIONS
 - 3.5.1 Sleeves
 - 3.5.2 Framed Prepared Openings

- 3.5.3 Closure Collars
- 3.5.4 Firestopping
- 3.6 FIELD PAINTING OF MECHANICAL EQUIPMENT
 - 3.6.1 Temperatures less than 120 degrees F
 - 3.6.2 Finish Painting
- 3.7 IDENTIFICATION SYSTEMS
- 3.8 TESTING, ADJUSTING, AND BALANCING
- 3.9 CLEANING AND ADJUSTING
- 3.10 OPERATION AND MAINTENANCE
 - 3.10.1 Operation and Maintenance Manuals
 - 3.10.2 Operation And Maintenance Training

-- End of Section Table of Contents --

SECTION 23 00 00

AIR SUPPLY, DISTRIBUTION, VENTILATION, AND EXHAUST SYSTEMS
08/10

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AIR MOVEMENT AND CONTROL ASSOCIATION INTERNATIONAL (AMCA)

- | | |
|----------|--|
| AMCA 201 | (2002; R 2011) Fans and Systems |
| AMCA 210 | (2007) Laboratory Methods of Testing Fans for Aerodynamic Performance Rating |
| AMCA 300 | (2008) Reverberant Room Method for Sound Testing of Fans |
| AMCA 301 | (1990; INT 2007) Methods for Calculating Fan Sound Ratings from Laboratory Test Data |

AIR-CONDITIONING, HEATING AND REFRIGERATION INSTITUTE (AHRI)

- | | |
|------------------|---|
| AHRI Guideline D | (1996) Application and Installation of Central Station Air-Handling Units |
|------------------|---|

AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA)

- | | |
|---------|---|
| ABMA 11 | (2014) Load Ratings and Fatigue Life for Roller Bearings |
| ABMA 9 | (1990; ERTA 2012; S 2013) Load Ratings and Fatigue Life for Ball Bearings |

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)

- | | |
|-------------|---|
| ASHRAE 62.1 | (2010; Errata 2011; INT 3 2012; INT 4 2012; INT 5 2013) Ventilation for Acceptable Indoor Air Quality |
|-------------|---|

ASTM INTERNATIONAL (ASTM)

- | | |
|-----------------|---|
| ASTM A123/A123M | (2013) Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products |
| ASTM A53/A53M | (2012) Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless |

ASTM A924/A924M	(2013) Standard Specification for General Requirements for Steel Sheet, Metallic-Coated by the Hot-Dip Process
ASTM B117	(2011) Standard Practice for Operating Salt Spray (Fog) Apparatus
ASTM B766	(1986; R 2008) Standard Specification for Electrodeposited Coatings of Cadmium
ASTM C553	(2013) Standard Specification for Mineral Fiber Blanket Thermal Insulation for Commercial and Industrial Applications
ASTM D1654	(2008) Evaluation of Painted or Coated Specimens Subjected to Corrosive Environments
ASTM D3359	(2009; E 2010; R 2010) Measuring Adhesion by Tape Test
ASTM D520	(2000; R 2011) Zinc Dust Pigment
ASTM E2016	(2011) Standard Specification for Industrial Woven Wire Cloth

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA MG 1	(2011; Errata 2012) Motors and Generators
NEMA MG 10	(2013) Energy Management Guide for Selection and Use of Fixed Frequency Medium AC Squirrel-Cage Polyphase Induction Motors
NEMA MG 11	(1977; R 2012) Energy Management Guide for Selection and Use of Single Phase Motors

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 701	(2010) Standard Methods of Fire Tests for Flame Propagation of Textiles and Films
----------	---

SHEET METAL AND AIR CONDITIONING CONTRACTORS' NATIONAL ASSOCIATION (SMACNA)

SMACNA 1966	(2005) HVAC Duct Construction Standards Metal and Flexible, 3rd Edition
SMACNA 1981	(2008) Seismic Restraint Manual Guidelines for Mechanical Systems, 3rd Edition

UNDERWRITERS LABORATORIES (UL)

UL 6	(2007; reprint Nov 2010) Electrical Rigid Metal Conduit-Steel
UL 705	(2004; Reprint Dec 2013) Standard for Power Ventilators

UL Bld Mat Dir

(2012) Building Materials Directory

1.2 SYSTEM DESCRIPTION

Furnish ductwork, piping offsets, fittings, and accessories as required to provide a complete installation. Coordinate the work of the different trades to avoid interference between piping, equipment, structural, and electrical work. Provide complete, in place, all necessary offsets in piping and ductwork, and all fittings, and other components, required to install the work as indicated and specified.

1.2.1 Mechanical Equipment Identification

The number of charts and diagrams shall be equal to or greater than the number of mechanical equipment rooms. Where more than one chart or diagram per space is required, mount these in edge pivoted, swinging leaf, extruded aluminum frame holders which open to 170 degrees.

1.2.1.1 Charts

Provide chart listing of equipment by designation numbers and capacities such as flow rates, pressure and temperature differences, heating and cooling capacities, horsepower, pipe sizes, and voltage and current characteristics.

1.2.2 Service Labeling

Label equipment, including fans, air handlers, terminal units, etc. with labels made of self-sticking, plastic film designed for permanent installation. Labels shall be in accordance with the typical examples below:

SERVICE	LABEL AND TAG DESIGNATION
Exhaust Fan Number	EF -
Gravity Ventilator Number	GV -

1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Detail Drawings; G

SD-03 Product Data

Centrifugal Fans

SD-08 Manufacturer's Instructions

Manufacturer's Installation Instructions
Operation and Maintenance Training

SD-10 Operation and Maintenance Data

Operation and Maintenance Manuals; G
Centrifugal Fans; G

1.4 QUALITY ASSURANCE

Except as otherwise specified, approval of materials and equipment is based on manufacturer's published data.

- a. Where materials and equipment are specified to conform to the standards of the Underwriters Laboratories, the label of or listing with reexamination in UL Bld Mat Dir, and UL 6 is acceptable as sufficient evidence that the items conform to Underwriters Laboratories requirements. In lieu of such label or listing, submit a written certificate from any nationally recognized testing agency, adequately equipped and competent to perform such services, stating that the items have been tested and that the units conform to the specified requirements. Outline methods of testing used by the specified agencies.
- b. Where materials or equipment are specified to be constructed or tested, or both, in accordance with the standards of the ASTM International (ASTM), the ASME International (ASME), or other standards, a manufacturer's certificate of compliance of each item is acceptable as proof of compliance.
- c. Conformance to such agency requirements does not relieve the item from compliance with other requirements of these specifications.

1.4.1 Prevention of Corrosion

Protect metallic materials against corrosion. Manufacturer shall provide rust-inhibiting treatment and standard finish for the equipment enclosures. Do not use aluminum in contact with earth, and where connected to dissimilar metal. Protect aluminum by approved fittings, barrier material, or treatment. Ferrous parts such as anchors, bolts, braces, boxes, bodies, clamps, fittings, guards, nuts, pins, rods, shims, thimbles, washers, and miscellaneous parts not of corrosion-resistant steel or nonferrous materials shall be hot-dip galvanized in accordance with ASTM A123/A123M for exterior locations and cadmium-plated in conformance with ASTM B766 for interior locations. Include illustrations of product markings, and the number of each type of bolt to be furnished in the certification.

1.4.2 Asbestos Prohibition

Do not use asbestos and asbestos-containing products.

1.4.3 Detail Drawings

Submit detail drawings showing equipment layout, including assembly and installation details and electrical connection diagrams; ductwork layout showing the location of all supports and hangers, typical hanger details,

gauge reinforcement, reinforcement spacing rigidity classification, and static pressure and seal classifications. Include any information required to demonstrate that the system has been coordinated and functions properly as a unit on the drawings and show equipment relationship to other parts of the work, including clearances required for operation and maintenance. Submit drawings showing bolt-setting information, and foundation bolts prior to concrete foundation construction for all equipment indicated or required to have concrete foundations. Submit function designation of the equipment and any other requirements specified throughout this Section with the shop drawings.

1.5 DELIVERY, STORAGE, AND HANDLING

Protect stored equipment at the jobsite from the weather, humidity and temperature variations, dirt and dust, or other contaminants. Additionally, cap or plug all pipes until installed.

PART 2 PRODUCTS

2.1 STANDARD PRODUCTS

Provide components and equipment that are "standard products" of a manufacturer regularly engaged in the manufacturing of products that are of a similar material, design and workmanship. "Standard products" is defined as being in satisfactory commercial or industrial use for 2 years before bid opening, including applications of components and equipment under similar circumstances and of similar size, satisfactorily completed by a product that is sold on the commercial market through advertisements, manufacturers' catalogs, or brochures. Products having less than a 2-year field service record are acceptable if a certified record of satisfactory field operation, for not less than 6000 hours exclusive of the manufacturer's factory tests, can be shown. Provide equipment items that are supported by a service organization. In product categories covered by ENERGY STAR or the Federal Energy Management Program, provide equipment that is listed on the ENERGY STAR Qualified Products List or that meets or exceeds the FEMP-designated Efficiency Requirements.

2.2 IDENTIFICATION PLATES

In addition to standard manufacturer's identification plates, provide engraved laminated phenolic identification plates for each piece of mechanical equipment. Identification plates are to designate the function of the equipment. Submit designation with the shop drawings. Identification plates shall be three layers, black-white-black, engraved to show white letters on black background. Letters shall be upper case. Identification plates 1-1/2-inches high and smaller shall be 1/16-inch thick, with engraved lettering 1/8-inch high; identification plates larger than 1-1/2-inches high shall be 1/8-inch thick, with engraved lettering of suitable height. Identification plates 1-1/2-inches high and larger shall have beveled edges. Install identification plates using a compatible adhesive.

2.3 EQUIPMENT GUARDS AND ACCESS

Fully enclose or guard belts, pulleys, chains, gears, couplings, projecting setscrews, keys, and other rotating parts exposed to personnel contact according to OSHA requirements.

2.4 ELECTRICAL WORK

- a. Provide motors, controllers, integral disconnects, contactors, and controls with their respective pieces of equipment, except controllers indicated as part of motor control centers. Provide electrical equipment, including motors and wiring, as specified in Section INTERIOR DISTRIBUTION SYSTEM. Provide manual or automatic control and protective or signal devices required for the operation specified and control wiring required for controls and devices specified, but not shown. For packaged equipment, include manufacturer provided controllers with the required monitors and timed restart.
- b. For single-phase motors, provide high-efficiency type, fractional-horsepower alternating-current motors, including motors that are part of a system, in accordance with NEMA MG 11. Integral size motors shall be the premium efficiency type in accordance with NEMA MG 1.
- c. For polyphase motors, provide squirrel-cage medium induction motors, including motors that are part of a system, and that meet the efficiency ratings for premium efficiency motors in accordance with NEMA MG 1. Select premium efficiency polyphase motors in accordance with NEMA MG 10.
- d. Provide motors in accordance with NEMA MG 1 and of sufficient size to drive the load at the specified capacity without exceeding the nameplate rating of the motor. Provide motors rated for continuous duty with the enclosure specified. Provide motor duty that allows for maximum frequency start-stop operation and minimum encountered interval between start and stop. Provide motor torque capable of accelerating the connected load within 20 seconds with 80 percent of the rated voltage maintained at motor terminals during one starting period. Provide motor starters complete with thermal overload protection and other necessary appurtenances. Fit motor bearings with grease supply fittings and grease relief to outside of the enclosure.

2.5 ANCHOR BOLTS

Provide anchor bolts for equipment placed on concrete equipment pads or on concrete slabs. Bolts to be of the size and number recommended by the equipment manufacturer and located by means of suitable templates. Installation of anchor bolts shall not degrade the surrounding concrete.

2.6 SEISMIC ANCHORAGE

Anchor equipment in accordance with applicable seismic criteria for the area and as defined in SMACNA 1981

2.7 PAINTING

Paint equipment units in accordance with approved equipment manufacturer's standards unless specified otherwise. Field retouch only if approved. Otherwise, return equipment to the factory for refinishing.

2.8 INDOOR AIR QUALITY

Provide equipment and components that comply with the requirements of ASHRAE 62.1 unless more stringent requirements are specified herein.

2.9 DUCT SYSTEMS

2.9.1 Metal Ductwork

Provide metal ductwork construction, including all fittings and components, that complies with SMACNA 1966, as supplemented and modified by this specification .

- a. Provide radius type elbows with a centerline radius of 1.5 times the width or diameter of the duct where space permits. Otherwise, elbows having a minimum radius equal to the width or diameter of the duct or square elbows with factory fabricated turning vanes are allowed.
- b. Provide ductwork that meets the requirements of Seal Class A. Provide ductwork in VAV systems upstream of the VAV boxes that meets the requirements of Seal Class A.
- c. Provide sealants that conform to fire hazard classification or 25 and 50 and are suitable for the range of air distribution and ambient temperatures to which it is exposed. Do not use pressure sensitive tape as a sealant.
- d. Make spiral lock seam duct, and flat oval with duct sealant and lock with not less than 3 equally spaced drive screws or other approved methods indicated in SMACNA 1966. Apply the sealant to the exposed male part of the fitting collar so that the sealer is on the inside of the joint and fully protected by the metal of the duct fitting. Apply one brush coat of the sealant over the outside of the joint to at least 2 inch band width covering all screw heads and joint gap. Dents in the male portion of the slip fitting collar are not acceptable. Fabricate outdoor air intake ducts and plenums with watertight soldered or brazed joints and seams.

2.9.1.1 General Service Duct Connectors

Provide a flexible duct connector approximately 6 inches in width where sheet metal connections are made to fans or where ducts of dissimilar metals are connected. For round/oval ducts, secure the flexible material by stainless steel or zinc-coated, iron clinch-type draw bands. For rectangular ducts, install the flexible material locked to metal collars using normal duct construction methods. Provide a composite connector system that complies with NFPA 701 and is classified as "flame-retardent fabrics" in UL Bld Mat Dir.

2.9.2 Bird Screens and Frames

Provide bird screens that conform to ASTM E2016, No. 2 mesh, aluminum or stainless steel. Provide "medium-light" rated aluminum screens. Provide "light" rated stainless steel screens. Provide removable type frames fabricated from either stainless steel or extruded aluminum.

2.10 AIR SYSTEMS EQUIPMENT

2.10.1 Fans

Test and rate fans according to AMCA 210. Calculate system effect on air moving devices in accordance with AMCA 201 where installed ductwork differs from that indicated on drawings. Install air moving devices to minimize fan system effect. Where system effect is unavoidable, determine the most

effective way to accommodate the inefficiencies caused by system effect on the installed air moving device. The sound power level of the fans shall not exceed 85 dBA when tested according to AMCA 300 and rated in accordance with AMCA 301. Provide all fans with an AMCA seal. Connect fans to the motors either directly or indirectly with V-belt drive. Use V-belt drives designed for not less than 120 percent of the connected driving capacity. Provide variable pitch motor sheaves for 15 hp and below, and fixed pitch as defined by AHRI Guideline D (A fixed-pitch sheave is provided on both the fan shaft and the motor shaft. This is a non-adjustable speed drive.). Select variable pitch sheaves to drive the fan at a speed which can produce the specified capacity when set at the approximate midpoint of the sheave adjustment. When fixed pitch sheaves are furnished, provide a replaceable sheave when needed to achieve system air balance. Provide motors for V-belt drives with adjustable rails or bases. Provide removable metal guards for all exposed V-belt drives, and provide speed-test openings at the center of all rotating shafts. Provide fans with personnel screens or guards on both suction and supply ends, except that the screens need not be provided, unless otherwise indicated, where ducts are connected to the fan. Provide fan and motor assemblies with vibration-isolation supports or mountings as indicated. Use vibration-isolation units that are standard products with published loading ratings. Select each fan to produce the capacity required at the fan static pressure indicated. Provide sound power level as indicated. Obtain the sound power level values according to AMCA 300. Provide standard AMCA arrangement, rotation, and discharge as indicated. Provide power ventilators that conform to UL 705 and have a UL label.

2.10.1.1 Centrifugal Fans

Provide fully enclosed, single-width single-inlet, or double-width double-inlet centrifugal fans, with AMCA Pressure Class I, II, or III as required or indicated for the design system pressure. Provide impeller wheels that are rigidly constructed and accurately balanced both statically and dynamically. Provide sleeve type, self-aligning and self-oiling bearings with oil reservoirs, or precision self-aligning roller or ball-type with accessible grease fittings or permanently lubricated type. Connect grease fittings to tubing for serviceability from a single accessible point. Provide L50 rated bearing life at not less than 200,000 hours as defined by ABMA 9 and ABMA 11. Provide steel, accurately finished fan shafts, with key seats and keys for impeller hubs and fan pulleys. Provide fan outlets of ample proportions, designed for the attachment of angles and bolts for attaching flexible connections. Unless otherwise indicated, provide motors that do not exceed 1800 rpm.

2.11 FACTORY PAINTING

Factory paint new equipment, which are not of galvanized construction. Paint with a corrosion resisting paint finish according to ASTM A123/A123M or ASTM A924/A924M. Clean, phosphatize and coat internal and external ferrous metal surfaces with a paint finish which has been tested according to ASTM B117, ASTM D1654, and ASTM D3359. Submit evidence of satisfactory paint performance for a minimum of 125 hours for units to be installed indoors and 500 hours for units to be installed outdoors. Provide rating of failure at the scribe mark that is not less than 6, average creepage not greater than 1/8 inch. Provide rating of the inscribed area that is not less than 10, no failure. On units constructed of galvanized steel that have been welded, provide a final shop docket of zinc-rich protective paint on exterior surfaces of welds or welds that have burned through from the interior according to ASTM D520 Type I.

Factory painting that has been damaged prior to acceptance by the Contracting Officer shall be field painted in compliance with the requirements of paragraph FIELD PAINTING OF MECHANICAL EQUIPMENT.

PART 3 EXECUTION

3.1 EXAMINATION

After becoming familiar with all details of the work, verify all dimensions in the field, and advise the Contracting Officer of any discrepancy before performing the work.

3.2 INSTALLATION

- a. Install materials and equipment in accordance with the requirements of the contract drawings and approved manufacturer's installation instructions. Accomplish installation by workers skilled in this type of work. Perform installation so that there is no degradation of the designed fire ratings of walls, partitions, ceilings, and floors.
- b. No installation is permitted to block or otherwise impede access to any existing machine or system. Install all hinged doors to swing open a minimum of 120 degrees. Provide an area in front of all access doors that clears a minimum of 3. In front of all access doors to electrical circuits, clear the area the minimum distance to energized circuits as specified in OSHA Standards, part 1910.333 (Electrical-Safety Related work practices) and an additional 3 feet.
- c. Except as otherwise indicated, install emergency switches and alarms in conspicuous locations. Mount all indicators, to include gauges, meters, and alarms in order to be easily visible by people in the area.

3.2.1 Equipment and Installation

Provide frames and supports for tanks, compressors, pumps, valves, air handling units, fans, coils, dampers, and other similar items requiring supports. Floor mount or ceiling hang air handling units as indicated. Anchor and fasten as detailed. Set floor-mounted equipment on not less than 6 inch concrete pads or curbs doweled in place unless otherwise indicated. Make concrete foundations heavy enough to minimize the intensity of the vibrations transmitted to the piping, duct work and the surrounding structure, as recommended in writing by the equipment manufacturer. In lieu of a concrete pad foundation, build a concrete pedestal block with isolators placed between the pedestal block and the floor. Make the concrete foundation or concrete pedestal block a mass not less than three times the weight of the components to be supported. Provide the lines connected to the pump mounted on pedestal blocks with flexible connectors.

3.2.2 Flexible Duct

Install pre-insulated flexible duct in accordance with the latest printed instructions of the manufacturer to ensure a vapor tight joint. Provide hangers, when required to suspend the duct, of the type recommended by the duct manufacturer and set at the intervals recommended.

3.2.3 Metal Ductwork

Install according to SMACNA 1966 unless otherwise indicated. Install duct supports for sheet metal ductwork according to SMACNA 1966, unless otherwise specified. Do not use friction beam clamps indicated in SMACNA 1966. Anchor risers on high velocity ducts in the center of the vertical run to allow ends of riser to move due to thermal expansion. Erect supports on the risers that allow free vertical movement of the duct. Attach supports only to structural framing members and concrete slabs. Do not anchor supports to metal decking unless a means is provided and approved for preventing the anchor from puncturing the metal decking. Where supports are required between structural framing members, provide suitable intermediate metal framing. Where C-clamps are used, provide retainer clips.

3.2.4 Duct Test Holes

Provide holes with closures or threaded holes with plugs in ducts and plenums as indicated or where necessary for the use of pitot tube in balancing the air system. Plug insulated duct at the duct surface, patched over with insulation and then marked to indicate location of test hole if needed for future use.

3.3 CUTTING AND PATCHING

Install work in such a manner and at such time that a minimum of cutting and patching of the building structure is required. Make holes in exposed locations, in or through existing floors, by drilling and smooth by sanding. Use of a jackhammer is permitted only where specifically approved. Make holes through masonry walls to accommodate sleeves with an iron pipe masonry core saw.

3.4 CLEANING

Thoroughly clean surfaces of piping and equipment that have become covered with dirt, plaster, or other material during handling and construction before such surfaces are prepared for final finish painting or are enclosed within the building structure. Before final acceptance, clean mechanical equipment, including piping, ducting, and fixtures, and free from dirt, grease, and finger marks. When the work area is in an occupied space such as office, laboratory or warehouse protect all furniture and equipment from dirt and debris. Incorporate housekeeping for field construction work which leaves all furniture and equipment in the affected area free of construction generated dust and debris; and, all floor surfaces vacuum-swept clean.

3.5 PENETRATIONS

Provide sleeves and prepared openings for duct mains, branches, and other penetrating items, and install during the construction of the surface to be penetrated. Cut sleeves flush with each surface. Place sleeves for round duct 15 inches and smaller. Build framed, prepared openings for round duct larger than 15 inches and square, rectangular or oval ducts. Sleeves and framed openings are also required where grilles, registers, and diffusers are installed at the openings. Provide one inch clearance between penetrating and penetrated surfaces except at grilles, registers, and diffusers. Pack spaces between sleeve or opening and duct or duct insulation with mineral fiber conforming with ASTM C553, Type 1, Class B-2.

3.5.1 Sleeves

Fabricate sleeves, except as otherwise specified or indicated, from 20 gauge thick mill galvanized sheet metal. Where sleeves are installed in bearing walls or partitions, provide black steel pipe conforming with ASTM A53/A53M, Schedule 20.

3.5.2 Framed Prepared Openings

Fabricate framed prepared openings from 20 gauge galvanized steel, unless otherwise indicated.

3.5.3 Closure Collars

Provide closure collars of a minimum 4 inches wide, unless otherwise indicated, for exposed ducts and items on each side of penetrated surface, except where equipment is installed. Install collar tight against the surface and fit snugly around the duct or insulation. Grind sharp edges smooth to prevent damage to penetrating surface. Fabricate collars for round ducts 15 inches in diameter or less from 20 gauge galvanized steel. Fabricate collars for square and rectangular ducts, or round ducts with minimum dimension over 15 inches from 18 gauge galvanized steel. Fabricate collars for square and rectangular ducts with a maximum side of 15 inches or less from 20 gauge galvanized steel. Install collars with fasteners a maximum of 6 inches on center. Attach to collars a minimum of 4 fasteners where the opening is 12 inches in diameter or less, and a minimum of 8 fasteners where the opening is 20 inches in diameter or less.

3.5.4 Firestopping

Where ducts pass through fire-rated walls, fire partitions, and fire rated chase walls, seal the penetration with fire stopping materials as specified in Section FIRESTOPPING.

3.6 FIELD PAINTING OF MECHANICAL EQUIPMENT

Clean, pretreat, prime and paint metal surfaces; except aluminum surfaces need not be painted. Apply coatings to clean dry surfaces. Clean the surfaces to remove dust, dirt, rust, oil and grease by wire brushing and solvent degreasing prior to application of paint, except clean to bare metal on metal surfaces subject to temperatures in excess of 120 degrees F. Where more than one coat of paint is specified, apply the second coat after the preceding coat is thoroughly dry. Lightly sand damaged painting and retouch before applying the succeeding coat. Provide aluminum or light gray finish coat.

3.6.1 Temperatures less than 120 degrees F

Immediately after cleaning, apply one coat of pretreatment primer applied to a minimum dry film thickness of 0.3 mil, one coat of primer applied to a minimum dry film thickness of one mil; and two coats of enamel applied to a minimum dry film thickness of one mil per coat to metal surfaces subject to temperatures less than 120 degrees F.

3.6.2 Finish Painting

The requirements for finish painting of items only primed at the factory, and surfaces not specifically noted otherwise, are specified in Section PAINTS AND COATINGS.

3.7 IDENTIFICATION SYSTEMS

Provide identification tags made of brass, engraved laminated plastic, or engraved anodized aluminum, indicating service and item number on all valves and dampers. Provide tags that are 1-3/8 inch minimum diameter with stamped or engraved markings. Make indentations black for reading clarity. Attach tags to valves with No. 12 AWG 0.0808-inch diameter corrosion-resistant steel wire, copper wire, chrome-plated beaded chain or plastic straps designed for that purpose.

3.8 TESTING, ADJUSTING, AND BALANCING

The requirements for testing, adjusting, and balancing are specified in Section 23 05 93 TESTING, ADJUSTING AND BALANCING FOR HVAC. Begin testing, adjusting, and balancing only when the air supply and distribution, including controls, has been completed, with the exception of performance tests.

3.9 CLEANING AND ADJUSTING

Wipe equipment clean, with no traces of oil, dust, dirt, or paint spots. Provide temporary filters prior to startup of all fans that are operated during construction, and install new filters after all construction dirt has been removed from the building, and the ducts, plenums, casings, and other items specified have been vacuum cleaned. Maintain system in this clean condition until final acceptance. Properly lubricate bearings with oil or grease as recommended by the manufacturer. Tighten belts to proper tension. Adjust control valves and other miscellaneous equipment requiring adjustment to setting indicated or directed. Adjust fans to the speed indicated by the manufacturer to meet specified conditions. Maintain all equipment installed under the contract until close out documentation is received, the project is completed and the building has been documented as beneficially occupied.

3.10 OPERATION AND MAINTENANCE

3.10.1 Operation and Maintenance Manuals

Submit six manuals at least 2 weeks prior to field training. Submit data complying with the requirements specified in Section OPERATION AND MAINTENANCE DATA. Submit Data Package 3 for the items/units listed under SD-10 Operation and Maintenance Data

3.10.2 Operation And Maintenance Training

Conduct a training course for the members of the operating staff as designated by the Contracting Officer. Make the training period consist of a total of 8 hours of normal working time and start it after all work specified herein is functionally completed and the Performance Tests have been approved. Conduct field instruction that covers all of the items contained in the Operation and Maintenance Manuals as well as demonstrations of routine maintenance operations. Submit the proposed On-site Training schedule concurrently with the Operation and Maintenance Manuals and at least 14 days prior to conducting the training course.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 23 - HEATING, VENTILATING, AND AIR CONDITIONING

SECTION 23 05 93

TESTING, ADJUSTING, AND BALANCING FOR HVAC

08/09

PART 1 GENERAL

- 1.1 REFERENCES
- 1.2 DEFINITIONS
 - 1.2.1 Similar Terms
- 1.3 WORK DESCRIPTION
 - 1.3.1 Air Distribution Systems
 - 1.3.2 TAB SCHEMATIC DRAWINGS
- 1.4 SUBMITTALS
- 1.5 QUALITY ASSURANCE
 - 1.5.1 Independent TAB Agency and Personnel Qualifications
 - 1.5.2 TAB Standard
 - 1.5.3 Qualifications
 - 1.5.3.1 TAB Firm
 - 1.5.3.2 TAB Related HVAC Submittals
 - 1.5.4 Responsibilities
 - 1.5.4.1 Contractor
 - 1.5.4.2 TAB Agency
 - 1.5.4.3 TAB Team Supervisor
 - 1.5.4.4 TAB Team Field Leader
 - 1.5.5 Test Reports
 - 1.5.5.1 Certified TAB Reports
- 1.6 PROJECT/SITE CONDITIONS
 - 1.6.1 TAB Services to Obtain Existing Conditions
- 1.7 SEQUENCING AND SCHEDULING
 - 1.7.1 TAB Submittal and Work Schedule
 - 1.7.1.1 Design Review Report
 - 1.7.1.2 Pre-Field TAB Engineering Report
- 1.8 WARRANTY

PART 2 PRODUCTS

PART 3 EXECUTION

- 3.1 WORK DESCRIPTIONS OF PARTICIPANTS
- 3.2 TAB MEETING
- 3.3 TAB PROCEDURES
 - 3.3.1 TAB Field Work
 - 3.3.2 Preliminary Procedures
 - 3.3.3 TAB Air Distribution Systems
 - 3.3.3.1 Exhaust Fans
 - 3.3.4 Deficiencies
 - 3.3.5 TAB Reports
 - 3.3.6 Quality Assurance - COTR TAB Field Acceptance Testing
 - 3.3.6.1 TAB Field Acceptance Testing

- 3.3.6.2 Additional COTR TAB Field Acceptance Testing
- 3.3.6.3 Prerequisite for Approval
- 3.4 MARKING OF SETTINGS
- 3.5 MARKING OF TEST PORTS

-- End of Section Table of Contents --

SECTION 23 05 93

TESTING, ADJUSTING, AND BALANCING FOR HVAC
08/09

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AIR MOVEMENT AND CONTROL ASSOCIATION INTERNATIONAL (AMCA)

AMCA 203 (1990; R 2011) Field Performance
Measurements of Fan Systems

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING
ENGINEERS (ASHRAE)

ASHRAE 62.1 (2010; Errata 2011; INT 3 2012; INT 4
2012; INT 5 2013) Ventilation for
Acceptable Indoor Air Quality

ASSOCIATED AIR BALANCE COUNCIL (AABC)

AABC MN-1 (2002; 6th ed) National Standards for
Total System Balance

NATIONAL ENVIRONMENTAL BALANCING BUREAU (NEBB)

NEBB MASV (2006) Procedural Standards for
Measurements and Assessment of Sound and
Vibration

NEBB PROCEDURAL STANDARDS (2005) Procedural Standards for TAB
(Testing, Adjusting and Balancing)
Environmental Systems

SHEET METAL AND AIR CONDITIONING CONTRACTORS' NATIONAL ASSOCIATION
(SMACNA)

SMACNA 1780 (2002) HVAC Systems - Testing, Adjusting
and Balancing, 3rd Edition

SMACNA 1858 (2013) HVAC Sound And Vibration Manual -
First Edition

1.2 DEFINITIONS

- a. AABC: Associated Air Balance Council.
- b. COTR: Contracting Officer's Technical Representative.
- e. HVAC: Heating, ventilating, and air conditioning; or heating, ventilating, and cooling.

- f. NEBB: National Environmental Balancing Bureau
- g. Out-of-tolerance data: Pertains only to field acceptance testing of TAB report. When applied to TAB work this phase means "a measurement taken during TAB field acceptance testing which does not fall within the range of plus 5 to minus 5 percent of the original measurement reported on the TAB Report for a specific parameter."
- h. Season of maximum heating load: The time of year when the outdoor temperature at the project site remains within plus or minus 30 degrees Fahrenheit of the project site's winter outdoor design temperature, throughout the period of TAB data recording.
- i. Season of maximum cooling load: The time of year when the outdoor temperature at the project site remains within plus or minus 5 degrees Fahrenheit of the project site's summer outdoor design temperature, throughout the period of TAB data recording.
- j. Season 1, Season 2: Depending upon when the project HVAC is completed and ready for TAB, Season 1 is defined, thereby defining Season 2. Season 1 could be the season of maximum heating load, or the season of maximum cooling load.
- k. Sound measurements terminology: Defined in AABC MN-1, NEBB MASV, or SMACNA 1858 (TABB).
- l. TAB: Testing, adjusting, and balancing (of HVAC systems).
- m. TAB'd: HVAC Testing/Adjusting/Balancing procedures performed.
- n. TAB Agency: TAB Firm
- r. TABB: Testing Adjusting and Balancing Bureau.

1.2.1 Similar Terms

In some instances, terminology differs between the Contract and the TAB Standard primarily because the intent of this Section is to use the industry standards specified, along with additional requirements listed herein to produce optimal results.

The following table of similar terms is provided for clarification only. Contract requirements take precedent over the corresponding AABC, NEBB, or TABB requirements where differences exist.

SIMILAR TERMS			
Contract Term	AABC Term	NEBB Term	TABB Term
TAB Standard	National Standards for Testing and Balancing Heating, Ventilating, and Air Conditioning Systems	Procedural Standards for Testing, Adjusting and Balancing of Environmental Systems	International Standards for Environmental Systems Balance

SIMILAR TERMS			
Contract Term	AABC Term	NEBB Term	TABB Term
TAB Specialist	TAB Engineer	TAB Supervisor	TAB Supervisor
Systems Readiness Check	Construction Phase Inspection	Field Readiness Check & Preliminary Field Procedures	Field Readiness Check & Prelim. Field Procedures

1.3 WORK DESCRIPTION

The work includes testing, adjusting, and balancing (TAB) of new and existing heating, ventilating, and cooling (HVAC) air distribution systems including equipment and performance data, ducts, and piping which are located within, on, under, between, and adjacent to buildings, including records of existing conditions.

Perform TAB in accordance with the requirements of the TAB procedural standard recommended by the TAB trade association that approved the TAB Firm's qualifications. Comply with requirements of AABC MN-1, NEBB PROCEDURAL STANDARDS, or SMACNA 1780 (TABB) as supplemented and modified by this specification section. All recommendations and suggested practices contained in the TAB procedural standards are considered mandatory.

Conduct TAB of the indicated existing systems and equipment and submit the specified TAB reports for approval. Conduct TAB work in accordance with the requirements of this section.

1.3.1 Air Distribution Systems

Test, adjust, and balance system (TAB) in compliance with this section.

1.3.2 TAB SCHEMATIC DRAWINGS

Show the following information on TAB Schematic Drawings:

1. A unique number or mark for each piece of equipment or terminal.
2. Air quantities at air terminals.

The Testing, Adjusting, and Balancing (TAB) Specialist must review the Contract Plans and Specifications and advise the Contracting Officer of any deficiencies that would prevent the effective and accurate TAB of the system.

Submit three copies of the TAB Schematic Drawings and Report Forms to the Contracting Officer, no later than 21 days prior to the start of TAB field measurements.

1.4 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office

that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Records of Existing Conditions; G

TAB Firm; G

SD-02 Shop Drawings

TAB Schematic Drawings and Report Forms; G

SD-03 Product Data

Equipment and Performance Data; G

TAB Related HVAC Submittals; G

A list of the TAB Related HVAC Submittals, no later than 7days after the approval of the TAB team engineer.

TAB Procedures; G

Proposed procedures for TAB, submitted with the TAB Schematic Drawings and Report Forms.

Calibration; G

SD-06 Test Reports

TAB report; G

TAB Firm; G

Independent TAB Agency and Personnel Qualifications; G

TAB Submittal and Work Schedule; G

Design review report; GPre-field TAB engineering report; G

1.5 QUALITY ASSURANCE

1.5.1 Independent TAB Agency and Personnel Qualifications

To secure approval for the proposed agency, submit information certifying that the TAB agency is a first tier subcontractor who is not affiliated with any other company participating in work on this contract, including design, furnishing equipment, or construction. Further, submit the following, for the agency, to Contracting Officer for approval:

a. Independent AABC or NEBB or TABB TAB agency:

TAB agency: AABC registration number and expiration date of current certification; or NEBB certification number and expiration date of current certification; or TABB certification number and expiration date of current certification.

TAB team supervisor: Name and copy of AABC or NEBB or TABB TAB

supervisor certificate and expiration date of current certification.

TAB team field leader: Name and documented evidence that the team field leader has satisfactorily performed full-time supervision of TAB work in the field for not less than 3 years immediately preceding this contract's bid opening date.

TAB team field technicians: Names and documented evidence that each field technician has satisfactorily assisted a TAB team field leader in performance of TAB work in the field for not less than one year immediately preceding this contract's bid opening date.

Current certificates: Registrations and certifications are current, and valid for the duration of this contract. Renew Certifications which expire prior to completion of the TAB work, in a timely manner so that there is no lapse in registration or certification. TAB agency or TAB team personnel without a current registration or current certification are not to perform TAB work on this contract.

- b. TAB Team Members: TAB team approved to accomplish work on this contract are full-time employees of the TAB agency. No other personnel is allowed to do TAB work on this contract.
- c. Replacement of TAB team members: Replacement of members may occur if each new member complies with the applicable personnel qualifications and each is approved by the Contracting Officer.

1.5.2 TAB Standard

Perform TAB in accordance with the requirements of the standard under which the TAB Firm's qualifications are approved, i.e., AABC MN-1, NEBB PROCEDURAL STANDARDS, or SMACNA 1780 unless otherwise specified herein. All recommendations and suggested practices contained in the TAB Standard are considered mandatory. Use the provisions of the TAB Standard, including checklists, report forms, etc., as nearly as practical, to satisfy the Contract requirements. Use the TAB Standard for all aspects of TAB, including qualifications for the TAB Firm and Specialist and calibration of TAB instruments. Where the instrument manufacturer calibration recommendations are more stringent than those listed in the TAB Standard, adhere to the manufacturer's recommendations.

All quality assurance provisions of the TAB Standard such as performance guarantees are part of this contract. For systems or system components not covered in the TAB Standard, TAB procedures must be developed by the TAB Specialist. Where new procedures, requirements, etc., applicable to the Contract requirements have been published or adopted by the body responsible for the TAB Standard used (AABC, NEBB, or TABB), the requirements and recommendations contained in these procedures and requirements are considered mandatory, including the latest requirements of ASHRAE 62.1.

1.5.3 Qualifications

1.5.3.1 TAB Firm

The TAB Firm must be either a member of AABC or certified by the NEBB or the TABB and certified in all categories and functions where measurements

or performance are specified on the plans.

Certification must be maintained for the entire duration of duties specified herein. If, for any reason, the firm loses subject certification during this period, the Contractor must immediately notify the Contracting Officer and submit another TAB Firm for approval. Any firm that has been the subject of disciplinary action by either the AABC, the NEBB, or the TABB within the five years preceding Contract Award is not be eligible to perform any duties related to the HVAC systems, including TAB. All work specified in this Section and in other related Sections to be performed by the TAB Firm will be considered invalid if the TAB Firm loses its certification prior to Contract completion and must be performed by an approved successor.

These TAB services are to assist the prime Contractor in performing the quality oversight for which it is responsible. The TAB Firm must be a prime subcontractor of the Contractor and be financially and corporately independent of the mechanical subcontractor, reporting directly to and paid by the Contractor.

1.5.3.2 TAB Related HVAC Submittals

The TAB Specialist must prepare a list of the submittals from the Contract Submittal Register that relate to the successful accomplishment of all HVAC TAB. Accompany the submittals identified on this list with a letter of approval signed and dated by the TAB Specialist when submitted to the Government. Ensure that the location and details of ports, terminals, connections, etc., necessary to perform TAB are identified on the submittals.

1.5.4 Responsibilities

The Contractor is responsible for ensuring compliance with the requirements of this section. This breakdown of specific duties is specified to facilitate adherence to the schedule listed in paragraph entitled "TAB Submittal and Work Schedule."

1.5.4.1 Contractor

- a. TAB personnel: Ensure that the TAB work is accomplished by a group meeting the requirements specified in paragraph entitled "TAB Personnel Qualification Requirements."
- b. TAB meeting: Attend the meeting with the TAB Supervisor, and ensure that a representative is present for the sheetmetal contractor, mechanical contractor, electrical contractor, and automatic temperature controls contractor.
- c. HVAC documentation: Furnish one complete set of the following HVAC-related documentation to the TAB agency:
 - (1) Contract drawings and specifications
 - (2) Approved submittal data for equipment
 - (3) Construction work schedule
 - (4) Up-to-date revisions and change orders for the previously listed items

d. Submittal and work schedules: Ensure that the schedule for submittals and work required by this section and specified in paragraph entitled "TAB Submittal and Work Schedule," is met.

e. Coordination of supporting personnel:

Provide the technical personnel, such as factory representatives or HVAC controls installer required by the TAB field team to support the TAB field measurement work.

Provide equipment mechanics to operate HVAC equipment and ductwork mechanics to provide the field designated test ports to enable TAB field team to accomplish the TAB field measurement work. Ensure these support personnel are present at the times required by the TAB team, and cause no delay in the TAB field work.

Conversely, ensure that the HVAC controls installer has required support from the TAB team field leader to complete the controls check out.

f. Deficiencies: Ensure that the TAB Agency supervisor submits all Design/Construction deficiency notifications directly to the Contracting officer within 3 days after the deficiency is encountered. Further, ensure that all such notification submittals are complete with explanation, including documentation, detailing deficiencies.

g. Prerequisite HVAC work: Complete check out and debugging of HVAC equipment, ducts, and controls prior to the TAB engineer arriving at the project site to begin the TAB work. Debugging includes searching for and eliminating malfunctioning elements in the HVAC system installations, and verifying all adjustable devices are functioning as designed. Include as prerequisite work items, the deficiencies pointed out by the TAB team supervisor in the design review report.

h. Prior to the TAB field team's arrival, ensure completion of the applicable inspections and work items listed in the TAB team supervisor's pre-field engineering report. Do not allow the TAB team to commence TAB field work until all of the following are completed.

(1) HVAC system installations are fully complete.

(2) HVAC prerequisite checkout work lists specified in the paragraph "Pre-Field TAB Engineering Report" are completed, submitted, and approved. Ensure that the TAB Agency gets a copy of the approved prerequisite HVAC work checklist.

1.5.4.2 TAB Agency

Provide the services of a TAB team which complies with the requirements of paragraph entitled "Independent TAB Agency Personnel Qualifications". The work to be performed by the TAB agency is limited to testing, adjusting, and balancing of HVAC air systems to satisfy the requirements of this specification section.

1.5.4.3 TAB Team Supervisor

a. Overall management: Supervise and manage the overall TAB team work effort, including preliminary and technical TAB procedures and TAB team

field work.

- b. Pre-TAB meeting: Attend meeting with Contractor.
 - c. Design review report: Review project specifications and accompanying drawings to verify that the air systems and water systems are designed in such a way that the TAB engineer can accomplish the work in compliance with the requirements of this section. Verify the presence and location of permanently installed test ports and other devices needed, including gauge cocks, thermometer wells, flow control devices, circuit setters, balancing valves, and manual volume dampers.
 - d. Support required: Specify the technical support personnel required from the Contractor other than the TAB agency; such as factory representatives for temperature controls or for complex equipment. Inform the Contractor in writing of the support personnel needed and when they are needed. Furnish the notice as soon as the need is anticipated, either with the design review report, or the pre-field engineering report, the during the TAB field work.
 - f. Pre-field engineering report: Utilizing the following HVAC-related documentation; contract drawings and specifications, approved submittal data for equipment, up-to-date revisions and change orders; prepare this report.
 - g. Prerequisite HVAC work checklist: Ensure the Contractor gets a copy of this checklist at the same time as the pre-field engineering report is submitted.
 - (2) Verify adherence, by the TAB field team, to the procedures specified in this section.
 - k. Certified TAB report: Certify the TAB report. This certification includes the following work:
 - (1) Review: Review the TAB field data report. From this field report, prepare the certified TAB report.
 - (2) Verification: Verify adherence, by the TAB field team, to the TAB plan prescribed by the pre-field engineering report and verify adherence to the procedures specified in this section.
 - l. Design/Construction deficiencies: Within 3 working days after the TAB Agency has encountered any design or construction deficiencies, the TAB Supervisor must submit written notification directly to the Contracting Officer, with a separate copy to the Contractor, of all such deficiencies. Provide in this submittal a complete explanation, including supporting documentation, detailing deficiencies. Where deficiencies are encountered that are believed to adversely impact successful completion of TAB, the TAB Agency must issue notice and request direction in the notification submittal.
 - m. TAB Field Check: The TAB team supervisor must attend and supervise TAB field check.
- 1.5.4.4 TAB Team Field Leader
- a. Field manager: Manage, in the field, the accomplishment of the work specified in Part 3, "Execution."

- b. Full time: Be present at the contract site when TAB field work is being performed by the TAB team; ensure day-to-day TAB team work accomplishments are in compliance with this section.
- c. Prerequisite HVAC work: Do not bring the TAB team to the contract site until a copy of the prerequisite HVAC Checklist, with all work items certified by the Contractor to be working as designed, reaches the office of the TAB Agency.

1.5.5 Test Reports

1.5.5.1 Certified TAB Reports

Submit: TAB Report in the following manner:

- a. Report format: Submit the completed pre-field data forms approved in the pre-field TAB Engineering Report completed by TAB field team, reviewed and certified by the TAB supervisor. Bind the report with a waterproof front and back cover. Include a table of contents identifying by page number the location of each report. Report forms and report data must be typewritten. Handwritten report forms or report data are not acceptable.
 - (1) . Measure and compile data on a continuous basis for the period in which TAB work affecting those rooms is being done.
 - (2) Measure and record data only after the HVAC systems installations are complete, the systems fully balanced and the HVAC systems controls operating in fully automatic mode.
 - (3) Data may be compiled using direct digital controls trend logging where available. Otherwise, temporarily install calibrated time versus temperature/humidity recorders for this purpose. The HVAC systems and controls must be fully operational a minimum of 24 hours in advance of commencing data compilation. Include the specified data in the .
- c. System Diagrams: Provide updated diagrams with final installed locations of all terminals and devices, any numbering changes, and actual test locations. Use a key numbering system on the diagram which identifies each outlet contained in the outlet airflow report sheets.
 - (6) Report static pressure readings of supply air, return air, exhaust/relief air, and outside air in duct at the point where these ducts connect to each air moving unit.
- e. Duct Traverses: Report duct traverses for main supply, return, exhaust, relief and outside air ducts. This includes all ducts, including those which lack 7 1/2 duct diameters upstream and 2 1/2 duct diameters downstream of straight duct unobstructed by duct fittings/offsets/elbows. The TAB Agency must evaluate and report findings on the duct traverses taken. Evaluate the suitability of the duct traverse measurement based on satisfying the qualifications for a pilot traverse plane as defined by AMCA 203, "Field Measurements", Section 8, paragraph 8.3, "Location of Traverse Plane."
- f. Instruments: List the types of instruments actually used to measure the tab data. Include in the listing each instrument's unique

identification number, calibration date, and calibration expiration date.

Instrumentation, used for taking wet bulb temperature readings must provide accuracy of plus or minus 5 percent at the measured face velocities. Submit instrument manufacturer's literature to document instrument accuracy performance is in compliance with that specified.

- g. Certification: Include the typed name of the TAB supervisor and the dated signature of the TAB supervisor.
- h. Performance Curves: The TAB Supervisor must include, in the TAB Reports, factory pump curves and fan curves for pumps and fans TAB'd on the job.
- i. Calibration Curves: The TAB Supervisor must include, in the TAB Reports, a factory calibration curve for installed flow control balancing valves, flow venturi's and flow orifices TAB'd on the job.

1.6 PROJECT/SITE CONDITIONS

1.6.1 TAB Services to Obtain Existing Conditions

Conduct TAB of the indicated existing systems and equipment and submit the specified TAB reports for approval. Conduct this TAB work in accordance with the requirements of this section.

1.7 SEQUENCING AND SCHEDULING

1.7.1 TAB Submittal and Work Schedule

Submit this schedule, and TAB Schematic Drawings, adapted for this particular contract, to the Contracting Officer (CO) for review and approval. Include with the submittal the planned calendar dates for each submittal or work item. Resubmit an updated version for CO approval every 90 calendar days. Compliance with the following schedule is the Contractor's responsibility.

Qualify TAB Personnel: Within 45 calendar days after date of contract award, submit TAB agency and personnel qualifications.

Pre-TAB Meeting: Within 30 calendar days after the date of approval of the TAB agency and personnel, meet with the COTR.

Design Review Report: Within 60 calendar days after the date of the TAB agency personnel qualifications approval, submit design review report.

Pre-Field TAB Engineering Report: Within 7 calendar days after approval of the TAB agency Personnel Qualifications, submit the Pre-Field TAB Engineering Report.

1.7.1.1 Design Review Report

Submit typed report describing omissions and deficiencies in the HVAC system's design that would preclude the TAB team from accomplishing the duct leakage testing work and the TAB work requirements of this section. Provide a complete explanation including supporting documentation detailing the design deficiency. State that no deficiencies are evident if that is the case.

1.7.1.2 Pre-Field TAB Engineering Report

Submit report containing the following information:

a. Step-by-step TAB procedure:

- (1) Strategy: Describe the method of approach to the TAB field work from start to finish. Include in this description a complete methodology for accomplishing each seasonal TAB field work session.
- (2) Air System Diagrams: Use the contract drawings and duct fabrication drawings if available to provide air system diagrams in the report showing the location of all terminal outlet supply, return, exhaust and transfer registers, grilles and diffusers. Use a key numbering system on the diagrams which identifies each outlet contained in the outlet airflow report sheets. Show intended locations of all traverses and static pressure readings.
- (3) Procedural steps: Delineate fully the intended procedural steps to be taken by the TAB field team to accomplish the required TAB work of each air distribution system and each water distribution system. Include intended procedural steps for TAB work for subsystems and system components.

b. Pre-field data: Submit AABC or NEBB or SMACNA 1780 data report forms with the following pre-field information filled in:

- (1) Design data obtained from system drawings, specifications, and approved submittals.
- (2) Notations detailing additional data to be obtained from the contract site by the TAB field team.
- (3) Designate the actual data to be measured in the TAB field work.
- (4) Provide a list of the types of instruments, and the measuring range of each, which are anticipated to be used for measuring in the TAB field work. By means of a keying scheme, specify on each TAB data report form submitted, which instruments will be used for measuring each item of TAB data. If the selection of which instrument to use, is to be made in the field, specify from which instruments the choice will be made. Place the instrument key number in the blank space where the measured data would be entered.

c. Prerequisite HVAC work checkout list: Provide a list of inspections and work items which are to be completed by the Contractor. This list must be acted upon and completed by the Contractor and then submitted and approved by the Contracting Officer prior to the TAB team coming to the contract site.

At a minimum, a list of the applicable inspections and work items listed in the NEBB PROCEDURAL STANDARDS, Section III, "Preliminary TAB Procedures" under paragraphs titled, "Air Distribution System Inspection" and "Hydronic Distribution System Inspection" must be provided for each separate system to be TAB'd.

1.8 WARRANTY

Furnish workmanship and performance warranty for the TAB system work performed for a period not less than 1 years from the date of Government acceptance of the work; issued directly to the Government. Include provisions that if within the warranty period the system shows evidence of major performance deterioration, or is significantly out of tolerance, resulting from defective TAB workmanship, the corrective repair or replacement of the defective materials and correction of the defective workmanship is the responsibility of the TAB firm. Perform corrective action that becomes necessary because of defective materials and workmanship while system TAB is under warranty 7 days after notification, unless additional time is approved by the Contracting Officer. Failure to perform repairs within the specified period of time constitutes grounds for having the corrective action and repairs performed by others and the cost billed to the TAB firm. The Contractor must also provide a 1 year contractor installation warranty.

PART 2 PRODUCTS

Not Used

PART 3 EXECUTION

3.1 WORK DESCRIPTIONS OF PARTICIPANTS

Comply with requirements of this section.

3.2 TAB MEETING

Meet with the Contracting Officer's technical representative (COTR) to develop a mutual understanding relative to the details of the TAB work requirements. Ensure that the TAB supervisor is present at this meeting. Requirements to be discussed include required submittals, work schedule, and field quality control.

3.3 TAB PROCEDURES

3.3.1 TAB Field Work

Test, adjust, and balance the HVAC systems until measured flow rates (air and water flow) are within plus or minus 5 percent of the design flow rates as specified or indicated on the contract documents.

That is, comply with the the requirements of AABC MN-1 , or SMACNA 1780 (TABB) and SMACNA 1858 (TABB), except as supplemented and modified by this section.

Provide instruments and consumables required to accomplish the TAB work. Calibrate and maintain instruments in accordance with manufacturer's written procedures.

Test, adjust, and balance the HVAC systems until measured flow rates (air and water flow) are within plus or minus 5 percent of the design flow rates as specified or indicated on the contract documents. Conduct TAB work, including measurement accuracy, and sound measurement work in conformance with the AABC MN-1 and AABC MN-4, or NEBB TABES and NEBB MASV, or SMACNA 1780 (used by TABB) and SMACNA 1858 sound measurement procedures, except as supplemented and modified by this section.

3.3.2 Preliminary Procedures

Use the approved pre-field engineering report as instructions and procedures for accomplishing TAB field work. TAB engineer is to locate, in the field, test ports required for testing. It is the responsibility of the sheet metal contractor to provide and install test ports as required by the TAB engineer.

3.3.3 TAB Air Distribution Systems

3.3.3.1 Exhaust Fans

Exhaust fan systems including fans, ducts, plenums, grilles, and hoods for exhaust air.

3.3.4 Deficiencies

Strive to meet the intent of this section to maximize the performance of the equipment as designed and installed. However, if deficiencies in equipment design or installation prevent TAB work from being accomplished within the range of design values specified in the paragraph entitled "Workmanship," provide written notice as soon as possible to the Contractor and the Contracting Officer describing the deficiency and recommended correction.

Responsibility for correction of installation deficiencies is the Contractor's. If a deficiency is in equipment design, call the TAB team supervisor for technical assistance. Responsibility for reporting design deficiencies to Contractor is the TAB team supervisor's.

3.3.5 TAB Reports

After completion of the TAB work, prepare a pre-final TAB report using the reporting forms approved in the pre-field engineering report. Data required by those approved data report forms is to be furnished by the TAB team. Except as approved otherwise in writing by the Contracting Officer, the TAB work and the TAB report is considered incomplete until the TAB work is accomplished to within the accuracy range specified in the paragraph entitled "Workmanship" of this section.

Prepare the report neatly and legibly; the pre-final TAB report is the final TAB report minus the TAB supervisor's review and certification. Obtain, at the contract site, the TAB supervisor's review and certification of the TAB report.

Verbally notify the COTR that the field check of the TAB report data can commence; give this verbal notice 48 hours in advance of field check commencement. Do not schedule field check of the TAB report until the specified workmanship requirements have been met or written approval of the deviations from the requirements have been received from the Contracting Officer.

3.3.6 Quality Assurance - COTR TAB Field Acceptance Testing

3.3.6.1 TAB Field Acceptance Testing

During the field acceptance testing, verify, in the presence of the COTR,

random selections of data (water, air quantities, air motion,) recorded in the TAB Report. Points and areas for field acceptance testing are to be selected by the COTR. Measurement and test procedures are the same as approved for TAB work for the TAB Report.

Field acceptance testing includes verification of TAB Report data recorded for the following equipment groups:

Group 5: 25 percent of the supply fans, exhaust fans, and pumps.

Further, if any data on the TAB Report for Groups 2 through 5 is found not to fall within the range of plus 5 to minus 5 percent of the TAB Report data, additional group data verification is required in the presence of the COTR. Verify TAB Report data for one additional piece of equipment in that group. Continue this additional group data verification until out-of-tolerance data ceases to be found.

3.3.6.2 Additional COTR TAB Field Acceptance Testing

If any of the acceptance testing measurements for a given equipment group is found not to fall within the range of plus 5 to minus 5 percent of the TAB Report data, terminate data verification for all affected data for that group. The affected data for the given group will be disapproved. Make the necessary corrections and prepare a revised TAB Report. Reschedule acceptance testing of the revised report data with the COTR.

Further, if any data on the TAB Report for a given field acceptance test group is out-of-tolerance, then field test data for one additional field test group as specified herein. Continue this increase field test work until out-of-tolerance data ceases to be found. This additional field testing is up and above the original 25 percent of the of reported data entries to be field tested.

If there are no more similar field test groups from which to choose, additional field testing from another, but different, type of field testing group must be tested.

3.3.6.3 Prerequisite for Approval

Compliance with the field acceptance testing requirements of this section is a prerequisite for the final Contracting Officer approval of the TAB Report submitted.

3.4 MARKING OF SETTINGS

Upon the final TAB work approval, permanently mark the settings of HVAC adjustment devices including valves, gauges, splitters, and dampers so that adjustment can be restored if disturbed at any time. Provide permanent markings clearly indicating the settings on the adjustment devices which result in the data reported on the submitted TAB report.

3.5 MARKING OF TEST PORTS

The TAB team is to permanently and legibly mark and identify the location points of the duct test ports. If the ducts have exterior insulation, make these markings on the exterior side of the duct insulation. Show the location of test ports on the as-built mechanical drawings with dimensions given where the test port is covered by exterior insulation.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 26 - ELECTRICAL

SECTION 26 00 00.00 20

BASIC ELECTRICAL MATERIALS AND METHODS

07/06

PART 1 GENERAL

- 1.1 REFERENCES
- 1.2 RELATED REQUIREMENTS
- 1.3 DEFINITIONS
- 1.4 ADDITIONAL SUBMITTALS INFORMATION
 - 1.4.1 Shop Drawings (SD-02)
 - 1.4.2 Product Data (SD-03)
- 1.5 QUALITY ASSURANCE
 - 1.5.1 Regulatory Requirements
 - 1.5.2 Standard Products
 - 1.5.2.1 Alternative Qualifications
 - 1.5.2.2 Material and Equipment Manufacturing Date
- 1.6 WARRANTY
- 1.7 POSTED OPERATING INSTRUCTIONS
- 1.8 MANUFACTURER'S NAMEPLATE
- 1.9 FIELD FABRICATED NAMEPLATES
- 1.10 ELECTRICAL REQUIREMENTS
- 1.11 INSTRUCTION TO GOVERNMENT PERSONNEL

PART 2 PRODUCTS

- 2.1 FACTORY APPLIED FINISH

PART 3 EXECUTION

- 3.1 FIELD APPLIED PAINTING
- 3.2 FIELD FABRICATED NAMEPLATE MOUNTING

-- End of Section Table of Contents --

SECTION 26 00 00.00 20

BASIC ELECTRICAL MATERIALS AND METHODS
07/06

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM D709 (2013) Laminated Thermosetting Materials

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE 100 (2000; Archived) The Authoritative Dictionary of IEEE Standards Terms

IEEE C2 (2012; Errata 2012; INT 1-4 2012; INT 5-7 2013; INT 8 2014) National Electrical Safety Code

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA 250 (2008) Enclosures for Electrical Equipment (1000 Volts Maximum)

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70 (2014; AMD 1 2013; Errata 1 2013; AMD 2 2013; Errata 2 2013; AMD 3 2014; Errata 3-4 2014; AMD 4-6 2014) National Electrical Code

1.2 RELATED REQUIREMENTS

This section applies to certain sections of Division 23, PLUMBING and HEATING VENTILATING AND AIR CONDITIONING. This section applies to all sections of Division 26 of this project specification unless specified otherwise in the individual sections. This section has been incorporated into, and thus, does not apply to, and is not referenced in the following sections.

Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM

1.3 DEFINITIONS

- a. Unless otherwise specified or indicated, electrical and electronics terms used in these specifications, and on the drawings, shall be as defined in IEEE 100.
- b. The technical sections referred to herein are those specification sections that describe products, installation procedures, and equipment

operations and that refer to this section for detailed description of submittal types.

- c. The technical paragraphs referred to herein are those paragraphs in PART 2 - PRODUCTS and PART 3 - EXECUTION of the technical sections that describe products, systems, installation procedures, equipment, and test methods.

1.4 ADDITIONAL SUBMITTALS INFORMATION

Submittals required in other sections that refer to this section must conform to the following additional requirements as applicable.

1.4.1 Shop Drawings (SD-02)

Include wiring diagrams and installation details of equipment indicating proposed location, layout and arrangement, control panels, accessories, piping, ductwork, and other items that must be shown to ensure a coordinated installation. Wiring diagrams shall identify circuit terminals and indicate the internal wiring for each item of equipment and the interconnection between each item of equipment. Drawings shall indicate adequate clearance for operation, maintenance, and replacement of operating equipment devices.

1.4.2 Product Data (SD-03)

Submittal shall include performance and characteristic curves.

1.5 QUALITY ASSURANCE

1.5.1 Regulatory Requirements

In each of the publications referred to herein, consider the advisory provisions to be mandatory, as though the word, "shall" had been substituted for "should" wherever it appears. Interpret references in these publications to the "authority having jurisdiction," or words of similar meaning, to mean the Contracting Officer. Equipment, materials, installation, and workmanship shall be in accordance with the mandatory and advisory provisions of NFPA 70 unless more stringent requirements are specified or indicated.

1.5.2 Standard Products

Provide materials and equipment that are products of manufacturers regularly engaged in the production of such products which are of equal material, design and workmanship. Products shall have been in satisfactory commercial or industrial use for 2 years prior to bid opening. The 2-year period shall include applications of equipment and materials under similar circumstances and of similar size. The product shall have been on sale on the commercial market through advertisements, manufacturers' catalogs, or brochures during the 2-year period. Where two or more items of the same class of equipment are required, these items shall be products of a single manufacturer; however, the component parts of the item need not be the products of the same manufacturer unless stated in the technical section.

1.5.2.1 Alternative Qualifications

Products having less than a 2-year field service record will be acceptable if a certified record of satisfactory field operation for not less than

6000 hours, exclusive of the manufacturers' factory or laboratory tests, is furnished.

1.5.2.2 Material and Equipment Manufacturing Date

Products manufactured more than 3 years prior to date of delivery to site shall not be used, unless specified otherwise.

1.6 WARRANTY

The equipment items shall be supported by service organizations which are reasonably convenient to the equipment installation in order to render satisfactory service to the equipment on a regular and emergency basis during the warranty period of the contract.

1.7 POSTED OPERATING INSTRUCTIONS

Provide for each system and principal item of equipment as specified in the technical sections for use by operation and maintenance personnel. The operating instructions shall include the following:

- a. Wiring diagrams, control diagrams, and control sequence for each principal system and item of equipment.
- b. Start up, proper adjustment, operating, lubrication, and shutdown procedures.
- c. Safety precautions.
- d. The procedure in the event of equipment failure.
- e. Other items of instruction as recommended by the manufacturer of each system or item of equipment.

Print or engrave operating instructions and frame under glass or in approved laminated plastic. Post instructions where directed. For operating instructions exposed to the weather, provide weather-resistant materials or weatherproof enclosures. Operating instructions shall not fade when exposed to sunlight and shall be secured to prevent easy removal or peeling.

1.8 MANUFACTURER'S NAMEPLATE

Each item of equipment shall have a nameplate bearing the manufacturer's name, address, model number, and serial number securely affixed in a conspicuous place; the nameplate of the distributing agent will not be acceptable.

1.9 FIELD FABRICATED NAMEPLATES

ASTM D709. Provide laminated plastic nameplates for each equipment enclosure, relay, switch, and device; as specified in the technical sections or as indicated on the drawings. Each nameplate inscription shall identify the function and, when applicable, the position. Nameplates shall be melamine plastic, 0.125 inch thick, white with black center core. Surface shall be matte finish. Corners shall be square. Accurately align lettering and engrave into the core. Minimum size of nameplates shall be one by 2.5 inches. Lettering shall be a minimum of 0.25 inch high normal block style.

1.10 ELECTRICAL REQUIREMENTS

Electrical installations shall conform to IEEE C2, NFPA 70, and requirements specified herein.

1.11 INSTRUCTION TO GOVERNMENT PERSONNEL

Where specified in the technical sections, furnish the services of competent instructors to give full instruction to designated Government personnel in the adjustment, operation, and maintenance of the specified systems and equipment, including pertinent safety requirements as required. Instructors shall be thoroughly familiar with all parts of the installation and shall be trained in operating theory as well as practical operation and maintenance work. Instruction shall be given during the first regular work week after the equipment or system has been accepted and turned over to the Government for regular operation. The number of man-days (8 hours per day) of instruction furnished shall be as specified in the individual section. [When more than 4 man-days of instruction are specified, use approximately half of the time for classroom instruction. Use other time for instruction with equipment or system. When significant changes or modifications in the equipment or system are made under the terms of the contract, provide additional instructions to acquaint the operating personnel with the changes or modifications.

PART 2 PRODUCTS

2.1 FACTORY APPLIED FINISH

Electrical equipment shall have factory-applied painting systems which shall, as a minimum, meet the requirements of NEMA 250 corrosion-resistance test and the additional requirements specified in the technical sections.

PART 3 EXECUTION

3.1 FIELD APPLIED PAINTING

Paint electrical equipment as required to match finish of adjacent surfaces or to meet the indicated or specified safety criteria. Painting shall be as specified in the section specifying the associated electrical equipment.

3.2 FIELD FABRICATED NAMEPLATE MOUNTING

Provide number, location, and letter designation of nameplates as indicated. Fasten nameplates to the device with a minimum of two sheet-metal screws or two rivets.

-- End of Section --